

09-18-00 A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>		Attorney Docket No. NPA025US
First Inventor or Application Identifier Paul Lapstun		Title Business Card as Electronic Mail Authorization Token
Express Mail Label No. EJ776408774US		

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
---	--

<p>1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 95] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 56]</p> <p>4. Oath or Declaration [Total Pages 3] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies</p>	<p>ACCOMPANYING APPLICATION PARTS</p> <p>7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) <input type="checkbox"/> Attorney</p> <p>9. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</p> <p>11. <input type="checkbox"/> Preliminary Amendment</p> <p>12. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p> <p>13. <input checked="" type="checkbox"/> * Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired</p> <p>14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>15. <input type="checkbox"/> Other: _____</p>
---	---

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label **24011** or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	Kia Silverbrook				
	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	Zip Code	2041
Country	AUSTRALIA	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

Name (Print/Type)	Kia Silverbrook	Registration No. (Attorney/Agent)	
Signature	<i>[Signature]</i>	Date	Sept. 12, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$)

746

Complete if Known

Application Number
Filing Date
First Named Inventor Paul Lapstun
Examiner Name
Group / Art Unit
Attorney Docket No. NPA025US

METHOD OF PAYMENT (check one)

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to.

Deposit Account Number

Deposit Account Name

☐ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

2. ☒ Payment Enclosed:

☒ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	345
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$) 345

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
34	-20** = 14	9	126
8	-3** = 5	39	195
Multiple Dependent			0

**or number previously paid, if greater. For Reissues, see below

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 78	202 39	Independent claims in excess of 3
104 260	204 130	Multiple dependent claim, if not paid
109 78	209 39	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 321

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	80
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	
Other fee (specify) _____			
Other fee (specify) _____			

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$) 80

SUBMITTED BY

Name (Print/Type) Kia Silverbrook

Registration No. (Attorney/Agent) 24011

Complete (if applicable)

Telephone 61-2-9818-6633

Signature


Date September 12, 2000

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN		Docket Number (Optional) NPA025US
Applicant, Patentee, or Identifier: <u>Silverbrook Research Pty Ltd</u>		
Application or Patent No.: _____		
Filed or Issued: <u>September</u> , 2000		
Title: <u>Business Card as Electronic Mail Authorization Token</u>		
I hereby state that I am <input checked="" type="checkbox"/> the owner of the small business concern identified below: <input type="checkbox"/> an official of the small business concern empowered to act on behalf of the concern identified below:		
NAME OF SMALL BUSINESS CONCERN <u>Silverbrook Research Pty. Ltd.</u>		
ADDRESS OF SMALL BUSINESS CONCERN <u>393 Darling Street, Balmain, NSW 2041, Australia</u>		
I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416		
I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in: <input checked="" type="checkbox"/> the specification filed herewith with title as listed above. <input type="checkbox"/> the application identified above. <input type="checkbox"/> the patent identified above.		
If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).		
Each person, concern, or organization having any rights in the invention is listed below: <input checked="" type="checkbox"/> no such person, concern, or organization exists. <input type="checkbox"/> each such person, concern, or organization is listed below.		
Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)		
I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))		
NAME OF PERSON SIGNING <u>Kia Silverbrook</u>		
TITLE OF PERSON IF OTHER THAN OWNER _____		
ADDRESS OF PERSON SIGNING <u>393 Darling Street, Balmain, NSW 2041, Australia</u>		
SIGNATURE <u></u> DATE <u>September 12, 2000</u>		

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231


Docket No.: NPA025US

Certificate of Mailing under 37 CFR 1.8

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to:

Assistant Commissioner for Patents
Washington, D.C. 20231

on September 15, 2000
Date


Signature

EVELYN WAI-LIN MAK
Typed or printed name of person signing Certificate

Note: Each paper must have its own certificate of mailing, or this certificate must identify each submitted paper.

Submitted herewith Utility Patent Application Transmittal and enclosures for an invention entitled "Business Card as Electronic Mail Authorization Token".

Express Mail Label: **EJ776408774US**

jc926 U.S. PTO
09/15/00



BUSINESS CARD AS ELECTRONIC MAIL AUTHORIZATION TOKEN

FIELD OF INVENTION

The present invention relates generally to methods, systems and apparatus for interacting with computers. More particularly, the invention relates to such interaction
5 using an interactive business card.

CO-PENDING APPLICATIONS

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention simultaneously with the present application:

10 NPA024US, NPA047US, NPA049US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

15 Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 30 June 2000:

NPA014US, NPA015US, NPA022US, NPA026US, NPA038US, NPA041US,
NPA050US, NPA051US, NPA052US, NPA063US, NPA065US, NPA067US,
20 NPA068US, NPA069US, NPA071US, NPA072US, NPB003US, NPB004US,
NPB005US, NPP019US, PEC04US, PEC05US, PEC06US, PEC07US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be
25 replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 23 May 2000:

NPA001US, NPA002US, NPA004US, NPA005US, NPA006US, NPA007US,
30 NPA008US, NPA009US, NPA010US, NPA012US, NPA016US, NPA017US,
NPA018US, NPA019US, NPA020US, NPA021US, NPA030US, NPA035US,
NPA048US, NPA075US, NPB001US, NPB002US, NPK002US, NPK003US,
NPK004US, NPK005US, NPM001US, NPM002US, NPM003US, NPM004US,
NPN001US, NPP001US, NPP003US, NPP005US, NPP006US, NPP007US,
35 NPP008US, NPP016US, NPP017US, NPP018US, NPS001US, NPS003US,

NPA025US

NPS020US, NPT001US, NPT002US, NPT003US, NPT004US, NPX001US,
NPX003US, NPX008US, NPX011US, NPX014US, NPX016US, IJ52US,
IJM52US, MJ10US, MJ11US, MJ12US, MJ13US, MJ14US,
MJ15US, MJ34US, MJ47US, MJ58US, MJ62US, MJ63US,
5 PAK04US, PAK05US, PAK06US, PAK07US, PAK08US, PEC01US,
PEC02US, PEC03US

The disclosures of these co-pending applications are incorporated herein by cross-
reference. Each application is temporarily identified by its docket number. This will be
10 replaced by the corresponding USSN when available.

BACKGROUND

The netpage system is intended to provide a paper-based user interface to published information and interactive services.

On occasion, users will want to provide information about themselves to others. A generally accepted approach to providing information to others, particularly in business, is by way of a business card. It is considered particularly useful if the business card includes the electronic mail address of the user. In some instances, users prefer to select the users from which they will receive electronic mail thereby limiting the amount of electronic mail they might otherwise receive.

Business cards are usually relatively small for convenient handling. However, their size is generally restrictive with respect to providing information about the owner of the business card to others.

SUMMARY OF INVENTION

The present invention provides a method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of the identity of the business card and of at least one reference point of the business card, the method including the steps of

receiving, in a computer system, indicating data from a sensing device regarding the identity of the business card and a position of the sensing device relative to the business card, the sensing device, when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data;

identifying, in the computer system and from the indicating data a request to authorize the transmission of electronic mail from the first to the second user; and

recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

Preferably, the request to authorize the transmission of electronic mail from the first to the second user is associated with at least one zone of the business card and the

method includes identifying, in the computer system and from the zone relative to which the sensing device is located, the request to authorize the transmission of electronic mail from the first to the second user.

The abovementioned method may also include the steps of

- 5 receiving, in the computer system, data regarding movement of the sensing device relative to the business card, the sensing device sensing its movement relative to the business card using at least some of the coded data; and

- identifying, in the computer system and from said movement being at least partially within said at least one zone, the request to authorize the transmission of
10 electronic mail from the first to the second user.

- The present invention also provides a method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the method
15 including the steps of

- receiving, in a computer system, data from a sensing device operated by the first user regarding the request and regarding movement of the sensing device relative to the business card, the sensing device, when moved relative to the business card, sensing the data regarding the request and generating the data regarding its own movement
20 relative to the business card using at least some of the coded data;

interpreting in the computer system, said movement of the sensing device as designating the request; and

recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

- 25 The present invention further provides a method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the method including the steps of

- 30 receiving, in a computer system, from a sensing device operated by the first

user, indicating data regarding the request, the sensing device, when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data;

5 interpreting in the computer system, the indicating data as designating the request; and

recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

The present invention yet further provides a method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorize the transmission of electronic mail from the first user to the second user, the method including the steps of

15 receiving, in a computer system, data from a sensing device regarding the identity of the first user and regarding the request, the sensing device containing data regarding the identity of the first user and sensing the data regarding the request using at least some of the coded data;

interpreting, in the computer system from the data regarding the identity of the first user and the data regarding the request, the request to authorize the transmission of electronic mail from the first user to the second user; and

20 recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

In a preferred embodiment, the abovementioned method includes receiving, in the computer system, data from the sensing device regarding movement of the sensing device relative to the business card, the sensing device generating data regarding its own movement relative to the business card.

Any one of the abovementioned methods may include the recording of the authority being effected by recording the identity of the first user in a list of authorized users. In this respect, any electronic mail sent to the second user may be rejected unless the sender of the electronic mail is recorded in the list of authorized users.

Additionally, for any one of the abovementioned methods, the request to authorize the transmission of electronic mail from the first user to the second user contained on the second user's business card may become disabled after a pre-determined period of time or after a pre-determined number of uses. In a particularly preferred
5 embodiment, the number of pre-determined uses is one.

Any one of the abovementioned methods may include the printing of the business card on demand. In a preferred embodiment, printing of the business card is on a surface of a surface-defining means and, at the same time that the business card is printed, the coded data on the surface is also printed. Preferably, the coded data is
10 substantially invisible to the unaided human eye.

The abovementioned methods may include retaining a retrievable record of each business card generated, the business card being retrievable using its identity as contained in its coded data.

The sensing device may contain an identification means which imparts a
15 unique identity to the sensing device and identify it as belonging to a particular user. In this respect, the abovementioned methods may include monitoring the identity in the computer system.

In another aspect, the present invention provides a system for enabling a first user to obtain, using a business card of a second user, authority to transmit electronic
20 mail to the second user, the business card including coded data indicative of the identity of the business card and of at least one reference point of the business card, the system including

a computer system for receiving indicating data from a sensing device for identifying a request to authorize the transmission of electronic mail from the first user
25 to the second user, the indicating data being indicative of the identity of the business card and a position of the sensing device relative to the business card, the sensing device, when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data, the computer system being configured to record, in the computer system, an authority allowing the first user to transmit electronic
30 mail to the second user.

The request to authorize the transmission of electronic mail from the first user to the second user may be associated with at least one zone of the business card. The sensing device may sense its movement relative to the business card using at least some of the coded data.

5 The present invention also provides a system for enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the system including

10 a computer system for receiving data from a sensing device operated by the first user, the data from the sensing device regarding the request and regarding movement of the sensing device relative to the business card, the sensing device when moved relative to the business card generating the data regarding its own movement relative to the business card, the sensing device also sensing the data regarding the
15 request using at least some of the coded data, the computer system being configured to interpret said movement as designating the request, and being configured to record, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

20 The present invention further provides a system for enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the system including

25 a computer system for receiving indicating data from a sensing device operated by the first user, the indicating data regarding the request, the sensing device when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data, the computer system being configured to interpret the indicating data as designating the request, and being configured to record, in the
30 computer system, an authority allowing the first user to transmit electronic mail to the second user.

The present invention further provides a system for enabling a first user to

obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the system including

- 5 a computer system for receiving data from a sensing device regarding the identity of the first user and regarding the request, the sensing device containing the data regarding the identity of the first user and sensing the data regarding the request using at least some of the coded data, the computer system being configured to record, in the computer system, an authority allowing the first user to transmit electronic mail to the
- 10 second user. The sensing device may sense its movement relative to the business card.

The recording of the authority may be effected by recording the identity of the first user in a list of authorized users. Additionally, electronic mail sent to the second user may be rejected unless the sender of the electronic mail is recorded in the list of authorized users.

- 15 Preferably, the computer system disables the request to authorize the transmission of electronic mail from the first user to the second user after a pre-determined period of time. The request may also be disabled after a pre-determined number of uses. In a particularly preferred embodiment, the number of pre-determined uses is one.

- 20 The sensing device may include a marking nib. In certain instances, the sensing device may contain an identification means which imparts a unique identity to the sensing device and identify it as being associated with a particular user.

- Preferably, the business card is printed on a surface of a surface-defining means and the system includes a printer for printing the business card on demand. The printer
- 25 may print the coded data at the same time as printing the business card on the surface-defining means. It is also preferable that the coded data be substantially invisible to the unaided human eye.

- Accordingly, the present invention provides a system and a method which utilizes one or more business cards capable of interacting with a computer system.
- 30 Whilst the novel method and system of the present invention may be used in conjunction

with a single computer system, in a particularly preferred form it is designed to operate over a computer network, such as the Internet.

Physically, the business card is disposed on a surface medium which may be of any suitable structure. However, in a preferred embodiment, the business card is
5 disposed on sheet material such as paper or the like which has the coded data printed on it and which allows interaction with the computer system. The coded data is detectable preferably, but not exclusively, outside the visible spectrum, thereby enabling it to be machine-readable but substantially invisible to the human eye. The business card may also include visible material which provides information to a user, such as the
10 application or purpose of the business card, and which visible information may be registered or correlate in position with the relevant hidden coded data.

The system also includes a sensing device to convey data from the business card to the computer system, and in some instances, to contribute additional data. Again, the sensing device may take a variety of forms but is preferably compact and easily
15 portable. In a particularly preferred arrangement, the sensing device is configured as a pen which is designed to be able to physically mark the interactive business card as well as to selectively enable the coded data from the business card to be read and transmitted to the computer system. The coded data then provides control information, configured such that designation thereof by a user causes instructions to be applied to the software
20 running on the computer system or network.

The nature of the interaction between the business card and the sensing device and the data that each contributes to the computer system may vary. In one arrangement, the coded data on the business card is indicative of the identity of the business card and of at least one reference point on that business card. In another embodiment, the
25 interactive business card includes coded data which is indicative of a parameter of the business card, whereas the sensing device is operative to provide data regarding its own movement relative to that business card to the computer system together with coded data from the business card.

BRIEF DESCRIPTION OF DRAWINGS

Preferred and other embodiments of the invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

- 5 Figure 1 is a schematic of a the relationship between a sample printed netpage and its online page description;

Figure 2 is a schematic view of a interaction between a netpage pen, a netpage printer, a netpage page server, and a netpage application server;

- 10 Figure 3 illustrates a collection of netpage servers and printers interconnected via a network;

Figure 4 is a schematic view of a high-level structure of a printed netpage and its online page description;

Figure 5a is a plan view showing a structure of a netpage tag;

- 15 Figure 5b is a plan view showing a relationship between a set of the tags shown in Figure 5a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 6a is a plan view showing an alternative structure of a netpage tag;

Figure 6b is a plan view showing a relationship between a set of the tags shown in Figure 6a and a field of view of a netpage sensing device in the form of a netpage pen;

- 20 Figure 6c is a plan view showing an arrangement of nine of the tags shown in Figure 6a where targets are shared between adjacent tags;

Figure 6d is a plan view showing the interleaving and rotation of the symbols of the four codewords of the tag shown in Figure 6a;

Figure 7 is a flowchart of a tag image processing and decoding algorithm;

- 25 Figure 8 is a perspective view of a netpage pen and its associated tag-sensing field-of-view cone;

Figure 9 is a perspective exploded view of the netpage pen shown in Figure 8;

Figure 10 is a schematic block diagram of a pen controller for the netpage pen shown in Figures 8 and 9;

Figure 11 is a perspective view of a wall-mounted netpage printer;

Figure 12 is a section through the length of the netpage printer of Figure 11;

Figure 12a is an enlarged portion of Figure 12 showing a section of the duplexed print engines and glue wheel assembly;

- 5 Figure 13 is a detailed view of the ink cartridge, ink, air and glue paths, and print engines of the netpage printer of Figures 11 and 12;

Figure 14 is a schematic block diagram of a printer controller for the netpage printer shown in Figures 11 and 12;

Figure 15 is a schematic block diagram of duplexed print engine controllers and

- 10 Memjet™ printheads associated with the printer controller shown in Figure 14;

Figure 16 is a schematic block diagram of the print engine controller shown in Figures 14 and 15;

Figure 17 is a perspective view of a single Memjet™ printing element, as used in, for example, the netpage printer of Figures 10 to 12;

- 15 Figure 18 is a perspective view of a small part of an array of Memjet™ printing elements;

Figure 19 is a series of perspective views illustrating the operating cycle of the Memjet™ printing element shown in Figure 13;

Figure 20 is a perspective view of a short segment of a pagewidth Memjet™ printhead;

- 20 Figure 21 is a schematic view of a user class diagram;

Figure 22 is a schematic view of a printer class diagram;

Figure 23 is a schematic view of a pen class diagram;

Figure 24 is a schematic view of an application class diagram;

Figure 25 is a schematic view of a document and page description class diagram;

- 25 Figure 26 is a schematic view of a document and page ownership class diagram;

Figure 27 is a schematic view of a terminal element specialization class diagram;

Figure 28 is a schematic view of a static element specialization class diagram;

Figure 29 is a schematic view of a hyperlink element class diagram;

Figure 30 is a schematic view of a hyperlink element specialization class diagram;

Figure 31 is a schematic view of a hyperlinked group class diagram;

Figure 32 is a schematic view of a form class diagram;

5 Figure 33 is a schematic view of a digital ink class diagram;

Figure 34 is a schematic view of a field element specialization class diagram;

Figure 35 is a schematic view of a checkbox field class diagram;

Figure 36 is a schematic view of a text field class diagram;

Figure 37 is a schematic view of a signature field class diagram;

10 Figure 38 is a flowchart of an input processing algorithm;

Figure 38a is a detailed flowchart of one step of the flowchart of Figure 38;

Figure 39 is a schematic view of a page server command element class diagram;

Figure 40 is a schematic view of a subscription delivery protocol;

Figure 41 is a schematic view of a hyperlink request class diagram;

15 Figure 42 is a schematic view of a hyperlink activation protocol;

Figure 43 is a schematic view of a form submission protocol;

Figure 44 is a schematic view of a set of user interface flow document icons;

Figure 45 is a schematic view of a set of user interface page layout element icons;

Figure 46 is a schematic view of an e-mail user class diagram;

20 Figure 47 is a schematic view of an e-mail class diagram;

Figure 48 is a schematic view of a mailbox class diagram;

Figure 49 is a schematic view of a contact list class diagram;

Figure 50 is a schematic view of a user interface flow for e-mail;

Figure 51 is a schematic view of a user interface flow for an e-mail recipient exception;

25 Figure 52 is a schematic view of an outgoing e-mail first page;

Figure 53 is a schematic view of an outgoing e-mail second or subsequent page;

Figure 54 is a schematic view of an add recipients page;

Figure 55 is a schematic view of an incoming e-mail first page;

Figure 56 is a schematic view of an incoming e-mail second or subsequent page;

5 Figure 57 is a schematic view of a user interface flow for editing a contact;

Figure 58 is a schematic view of an edit contacts page;

Figure 59 is a schematic view of a user interface flow for a global user directory;

Figure 60 is a schematic view of a user information page;

Figure 61 is a schematic view of a user interface flow for a business card;

10 Figure 62 is a schematic view of a business card;

Figure 63 is a schematic view of an e-mail authorization token class diagram;

Figure 64 is a schematic view of a user interface flow for requesting a business card; and

Figure 65 is a schematic view of a business card request page.

DETAILED DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

Note: Memjet™ is a trade mark of Silverbrook Research Pty Ltd, Australia.

In the preferred embodiment, the invention is configured to work with the netpage networked computer system, a detailed overview of which follows. It will be appreciated that not every implementation will necessarily embody all or even most of the specific details and extensions discussed below in relation to the basic system. However, the system is described in its most complete form to reduce the need for external reference when attempting to understand the context in which the preferred embodiments and aspects of the present invention operate.

10 In brief summary, the preferred form of the netpage system employs a computer interface in the form of a mapped surface, that is, a physical surface which contains references to a map of the surface maintained in a computer system. The map references can be queried by an appropriate sensing device. Depending upon the specific implementation, the map references may be encoded visibly or invisibly, and defined in
15 such a way that a local query on the mapped surface yields an unambiguous map reference both within the map and among different maps. The computer system can contain information about features on the mapped surface, and such information can be retrieved based on map references supplied by a sensing device used with the mapped surface. The information thus retrieved can take the form of actions which are initiated
20 by the computer system on behalf of the operator in response to the operator's interaction with the surface features.

In its preferred form, the netpage system relies on the production of, and human interaction with, netpages. These are pages of text, graphics and images printed on ordinary paper, but which work like interactive web pages. Information is encoded on
25 each page using ink which is substantially invisible to the unaided human eye. The ink, however, and thereby the coded data, can be sensed by an optically imaging pen and transmitted to the netpage system.

In the preferred form, active buttons and hyperlinks on each page can be clicked with the pen to request information from the network or to signal preferences to a
30 network server. In one embodiment, text written by hand on a netpage is automatically recognized and converted to computer text in the netpage system, allowing forms to be

filled in. In other embodiments, signatures recorded on a netpage are automatically verified, allowing e-commerce transactions to be securely authorized.

As illustrated in Figure 1, a printed netpage 1 can represent a interactive form which can be filled in by the user both physically, on the printed page, and
5 “electronically”, via communication between the pen and the netpage system. The example shows a “Request” form containing name and address fields and a submit button. The netpage consists of graphic data 2 printed using visible ink, and coded data 3 printed as a collection of tags 4 using invisible ink. The corresponding page description
5, stored on the netpage network, describes the individual elements of the netpage. In
10 particular it describes the type and spatial extent (zone) of each interactive element (i.e. text field or button in the example), to allow the netpage system to correctly interpret input via the netpage. The submit button 6, for example, has a zone 7 which corresponds to the spatial extent of the corresponding graphic 8.

As illustrated in Figure 2, the netpage pen 101, a preferred form of which is
15 shown in Figures 8 and 9 and described in more detail below, works in conjunction with a netpage printer 601, an Internet-connected printing appliance for home, office or mobile use. The pen is wireless and communicates securely with the netpage printer via a short-range radio link 9.

The netpage printer 601, a preferred form of which is shown in Figures 11 to
20 13 and described in more detail below, is able to deliver, periodically or on demand, personalized newspapers, magazines, catalogs, brochures and other publications, all printed at high quality as interactive netpages. Unlike a personal computer, the netpage printer is an appliance which can be, for example, wall-mounted adjacent to an area where the morning news is first consumed, such as in a user’s kitchen, near a breakfast
25 table, or near the household’s point of departure for the day. It also comes in tabletop, desktop, portable and miniature versions.

Netpages printed at their point of consumption combine the ease-of-use of paper with the timeliness and interactivity of an interactive medium.

As shown in Figure 2, the netpage pen 101 interacts with the coded data on a
30 printed netpage 1 and communicates, via a short-range radio link 9, the interaction to a netpage printer. The printer 601 sends the interaction to the relevant netpage page server

10 for interpretation. In appropriate circumstances, the page server sends a corresponding message to application computer software running on a netpage application server 13. The application server may in turn send a response which is printed on the originating printer.

- 5 The netpage system is made considerably more convenient in the preferred embodiment by being used in conjunction with high-speed microelectromechanical system (MEMS) based inkjet (Memjet™) printers. In the preferred form of this technology, relatively high-speed and high-quality printing is made more affordable to consumers. In its preferred form, a netpage publication has the physical characteristics of
10 a traditional newsmagazine, such as a set of letter-size glossy pages printed in full color on both sides, bound together for easy navigation and comfortable handling.

- The netpage printer exploits the growing availability of broadband Internet access. Cable service is available to 95% of households in the United States, and cable modem service offering broadband Internet access is already available to 20% of these.
15 The netpage printer can also operate with slower connections, but with longer delivery times and lower image quality. Indeed, the netpage system can be enabled using existing consumer inkjet and laser printers, although the system will operate more slowly and will therefore be less acceptable from a consumer's point of view. In other embodiments, the netpage system is hosted on a private intranet. In still other embodiments, the netpage
20 system is hosted on a single computer or computer-enabled device, such as a printer.

- Netpage publication servers 14 on the netpage network are configured to deliver print-quality publications to netpage printers. Periodical publications are delivered automatically to subscribing netpage printers via pointcasting and multicasting Internet protocols. Personalized publications are filtered and formatted according to
25 individual user profiles.

- A netpage printer can be configured to support any number of pens, and a pen can work with any number of netpage printers. In the preferred implementation, each netpage pen has a unique identifier. A household may have a collection of colored netpage pens, one assigned to each member of the family. This allows each user to
30 maintain a distinct profile with respect to a netpage publication server or application server.

A netpage pen can also be registered with a netpage registration server 11 and linked to one or more payment card accounts. This allows e-commerce payments to be securely authorized using the netpage pen. The netpage registration server compares the signature captured by the netpage pen with a previously registered signature, allowing it to authenticate the user's identity to an e-commerce server. Other biometrics can also be used to verify identity. A version of the netpage pen includes fingerprint scanning, verified in a similar way by the netpage registration server.

Although a netpage printer may deliver periodicals such as the morning newspaper without user intervention, it can be configured never to deliver unsolicited junk mail. In its preferred form, it only delivers periodicals from subscribed or otherwise authorized sources. In this respect, the netpage printer is unlike a fax machine or e-mail account which is visible to any junk mailer who knows the telephone number or email address.

1 NETPAGE SYSTEM ARCHITECTURE

Each object model in the system is described using a Unified Modeling Language (UML) class diagram. A class diagram consists of a set of object classes connected by relationships, and two kinds of relationships are of interest here: associations and generalizations. An association represents some kind of relationship between objects, i.e. between instances of classes. A generalization relates actual classes, and can be understood in the following way: if a class is thought of as the set of all objects of that class, and class A is a generalization of class B, then B is simply a subset of A. The UML does not directly support second-order modelling - i.e. classes of classes.

Each class is drawn as a rectangle labelled with the name of the class. It contains a list of the attributes of the class, separated from the name by a horizontal line, and a list of the operations of the class, separated from the attribute list by a horizontal line. In the class diagrams which follow, however, operations are never modelled.

An association is drawn as a line joining two classes, optionally labelled at either end with the multiplicity of the association. The default multiplicity is one. An asterisk (*) indicates a multiplicity of "many", i.e. zero or more. Each association is optionally labelled with its name, and is also optionally labelled at either end with the role of the corresponding class. An open diamond indicates an aggregation association

("is-part-of"), and is drawn at the aggregator end of the association line.

A generalization relationship ("is-a") is drawn as a solid line joining two classes, with an arrow (in the form of an open triangle) at the generalization end.

When a class diagram is broken up into multiple diagrams, any class which is duplicated is shown with a dashed outline in all but the main diagram which defines it. It is shown with attributes only where it is defined.

1.1 NETPAGES

Netpages are the foundation on which a netpage network is built. They provide a paper-based user interface to published information and interactive services.

- 10 A netpage consists of a printed page (or other surface region) invisibly tagged with references to an online description of the page. The online page description is maintained persistently by a netpage page server. The page description describes the visible layout and content of the page, including text, graphics and images. It also describes the input elements on the page, including buttons, hyperlinks, and input fields.
- 15 A netpage allows markings made with a netpage pen on its surface to be simultaneously captured and processed by the netpage system.

Multiple netpages can share the same page description. However, to allow input through otherwise identical pages to be distinguished, each netpage is assigned a unique page identifier. This page ID has sufficient precision to distinguish between a very large number of netpages.

Each reference to the page description is encoded in a printed tag. The tag identifies the unique page on which it appears, and thereby indirectly identifies the page description. The tag also identifies its own position on the page. Characteristics of the tags are described in more detail below.

- 25 Tags are printed in infrared-absorptive ink on any substrate which is infrared-reflective, such as ordinary paper. Near-infrared wavelengths are invisible to the human eye but are easily sensed by a solid-state image sensor with an appropriate filter.

A tag is sensed by an area image sensor in the netpage pen, and the tag data is transmitted to the netpage system via the nearest netpage printer. The pen is wireless and communicates with the netpage printer via a short-range radio link. Tags are sufficiently

small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless. Tags are error-correctably encoded to make them partially tolerant to surface damage.

- 5 The netpage page server maintains a unique page instance for each printed netpage, allowing it to maintain a distinct set of user-supplied values for input fields in the page description for each printed netpage.

 The relationship between the page description, the page instance, and the printed netpage is shown in Figure 4. The printed netpage may be part of a printed
10 netpage document 45. The page instance is associated with both the netpage printer which printed it and, if known, the netpage user who requested it.

1.2 NETPAGE TAGS

1.2.1 Tag Data Content

 In a preferred form, each tag identifies the region in which it appears, and the
15 location of that tag within the region. A tag may also contain flags which relate to the region as a whole or to the tag. One or more flag bits may, for example, signal a tag sensing device to provide feedback indicative of a function associated with the immediate area of the tag, without the sensing device having to refer to a description of the region. A netpage pen may, for example, illuminate an "active area" LED when in
20 the zone of a hyperlink.

 As will be more clearly explained below, in a preferred embodiment, each tag contains an easily recognized invariant structure which aids initial detection, and which assists in minimizing the effect of any warp induced by the surface or by the sensing process. The tags preferably tile the entire page, and are sufficiently small and densely
25 arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless.

 In a preferred embodiment, the region to which a tag refers coincides with an entire page, and the region ID encoded in the tag is therefore synonymous with the page
30 ID of the page on which the tag appears. In other embodiments, the region to which a tag

refers can be an arbitrary subregion of a page or other surface. For example, it can coincide with the zone of an interactive element, in which case the region ID can directly identify the interactive element.

Table 1 - Tag data

Field	Precision (bits)
Region ID	100
Tag ID	16
Flags	4
Total	120

5

Each tag contains 120 bits of information, typically allocated as shown in Table 1. Assuming a maximum tag density of 64 per square inch, a 16-bit tag ID supports a region size of up to 1024 square inches. Larger regions can be mapped continuously without increasing the tag ID precision simply by using abutting regions and maps. The 100-bit region ID allows 2^{100} ($\sim 10^{30}$ or a million trillion trillion) different regions to be uniquely identified.

10

1.2.2 Tag Data Encoding

The 120 bits of tag data are redundantly encoded using a (15, 5) Reed-Solomon code. This yields 360 encoded bits consisting of 6 codewords of 15 4-bit symbols each. The (15, 5) code allows up to 5 symbol errors to be corrected per codeword, i.e. it is tolerant of a symbol error rate of up to 33% per codeword.

15

Each 4-bit symbol is represented in a spatially coherent way in the tag, and the symbols of the six codewords are interleaved spatially within the tag. This ensures that a burst error (an error affecting multiple spatially adjacent bits) damages a minimum number of symbols overall and a minimum number of symbols in any one codeword, thus maximising the likelihood that the burst error can be fully corrected.

20

Any suitable error-correcting code can be used in place of a (15, 5) Reed-Solomon code, for example a Reed-Solomon code with more or less redundancy, with the same or different symbol and codeword sizes; another block code; or a different kind of code, such as a convolutional code (see, for example, Stephen B. Wicker, Error Control Systems for Digital Communication and Storage, Prentice-Hall 1995, the contents of which are herein incorporated by cross-reference).

25

1.2.3 Physical Tag Structure

The physical representation of the tag, shown in Figure 5a, includes fixed target structures 15, 16, 17 and variable data areas 18. The fixed target structures allow a sensing device such as the netpage pen to detect the tag and infer its three-dimensional orientation relative to the sensor. The data areas contain representations of the individual bits of the encoded tag data.

To achieve proper tag reproduction, the tag is rendered at a resolution of 256×256 dots. When printed at 1600 dots per inch this yields a tag with a diameter of about 4 mm. At this resolution the tag is designed to be surrounded by a “quiet area” of radius 16 dots. Since the quiet area is also contributed by adjacent tags, it only adds 16 dots to the effective diameter of the tag.

The tag includes six target structures. A detection ring 15 allows the sensing device to initially detect the tag. The ring is easy to detect because it is rotationally invariant and because a simple correction of its aspect ratio removes most of the effects of perspective distortion. An orientation axis 16 allows the sensing device to determine the approximate planar orientation of the tag due to the yaw of the sensor. The orientation axis is skewed to yield a unique orientation. Four perspective targets 17 allow the sensing device to infer an accurate two-dimensional perspective transform of the tag and hence an accurate three-dimensional position and orientation of the tag relative to the sensor.

All target structures are redundantly large to improve their immunity to noise.

The overall tag shape is circular. This supports, amongst other things, optimal tag packing on an irregular triangular grid. In combination with the circular detection ring, this makes a circular arrangement of data bits within the tag optimal. To maximise its size, each data bit is represented by a radial wedge in the form of an area bounded by two radial lines and two concentric circular arcs. Each wedge has a minimum dimension of 8 dots at 1600 dpi and is designed so that its base (its inner arc), is at least equal to this minimum dimension. The height of the wedge in the radial direction is always equal to the minimum dimension. Each 4-bit data symbol is represented by an array of 2×2 wedges.

The 15 4-bit data symbols of each of the six codewords are allocated to the four

concentric symbol rings 18a to 18d in interleaved fashion. Symbols are allocated alternately in circular progression around the tag.

The interleaving is designed to maximise the average spatial distance between any two symbols of the same codeword.

5 In order to support “single-click” interaction with a tagged region via a sensing device, the sensing device must be able to see at least one entire tag in its field of view no matter where in the region or at what orientation it is positioned. The required diameter of the field of view of the sensing device is therefore a function of the size and spacing of the tags.

10 Assuming a circular tag shape, the minimum diameter of the sensor field of view is obtained when the tags are tiled on a equilateral triangular grid, as shown in Figure 5b.

1.2.4 Tag Image Processing and Decoding

15 The tag image processing and decoding performed by a sensing device such as the netpage pen is shown in Figure 7. While a captured image is being acquired from the image sensor, the dynamic range of the image is determined (at 20). The center of the range is then chosen as the binary threshold for the image 21. The image is then thresholded and segmented into connected pixel regions (i.e. shapes 23) (at 22). Shapes which are too small to represent tag target structures are discarded. The size and centroid
20 of each shape is also computed.

Binary shape moments 25 are then computed (at 24) for each shape, and these provide the basis for subsequently locating target structures. Central shape moments are by their nature invariant of position, and can be easily made invariant of scale, aspect ratio and rotation.

25 The ring target structure 15 is the first to be located (at 26). A ring has the advantage of being very well behaved when perspective-distorted. Matching proceeds by aspect-normalizing and rotation-normalizing each shape’s moments. Once its second-order moments are normalized the ring is easy to recognize even if the perspective distortion was significant. The ring’s original aspect and rotation 27 together provide a
30 useful approximation of the perspective transform.

The axis target structure 16 is the next to be located (at 28). Matching proceeds by applying the ring's normalizations to each shape's moments, and rotation-normalizing the resulting moments. Once its second-order moments are normalized the axis target is easily recognized. Note that one third order moment is required to disambiguate the two possible orientations of the axis. The shape is deliberately skewed to one side to make this possible. Note also that it is only possible to rotation-normalize the axis target after it has had the ring's normalizations applied, since the perspective distortion can hide the axis target's axis. The axis target's original rotation provides a useful approximation of the tag's rotation due to pen yaw 29.

10 The four perspective target structures 17 are the last to be located (at 30). Good estimates of their positions are computed based on their known spatial relationships to the ring and axis targets, the aspect and rotation of the ring, and the rotation of the axis. Matching proceeds by applying the ring's normalizations to each shape's moments. Once their second-order moments are normalized the circular perspective targets are easy to
15 recognize, and the target closest to each estimated position is taken as a match. The original centroids of the four perspective targets are then taken to be the perspective-distorted corners 31 of a square of known size in tag space, and an eight-degree-of-freedom perspective transform 33 is inferred (at 32) based on solving the well-understood equations relating the four tag-space and image-space point pairs (see
20 Heckbert, P., Fundamentals of Texture Mapping and Image Warping, Masters Thesis, Dept. of EECS, U. of California at Berkeley, Technical Report No. UCB/CSD 89/516, June 1989, the contents of which are herein incorporated by cross-reference).

The inferred tag-space to image-space perspective transform is used to project (at 36) each known data bit position in tag space into image space where the real-valued
25 position is used to bilinearly interpolate (at 36) the four relevant adjacent pixels in the input image. The previously computed image threshold 21 is used to threshold the result to produce the final bit value 37.

Once all 360 data bits 37 have been obtained in this way, each of the six 60-bit Reed-Solomon codewords is decoded (at 38) to yield 20 decoded bits 39, or 120 decoded
30 bits in total. Note that the codeword symbols are sampled in codeword order, so that codewords are implicitly de-interleaved during the sampling process.

The ring target 15 is only sought in a subarea of the image whose relationship to the image guarantees that the ring, if found, is part of a complete tag. If a complete tag is not found and successfully decoded, then no pen position is recorded for the current frame. Given adequate processing power and ideally a non-minimal field of view 193, an
5 alternative strategy involves seeking another tag in the current image.

The obtained tag data indicates the identity of the region containing the tag and the position of the tag within the region. An accurate position 35 of the pen nib in the region, as well as the overall orientation 35 of the pen, is then inferred (at 34) from the perspective transform 33 observed on the tag and the known spatial relationship between
10 the pen's physical axis and the pen's optical axis.

1.2.5 Alternative Tag Structures

The tag structure described above is designed to support the tagging of non-planar surfaces where a regular tiling of tags may not be possible. In the more usual case of planar surfaces where a regular tiling of tags is possible, i.e. surfaces such as sheets of
15 paper and the like, more efficient tag structures can be used which exploit the regular nature of the tiling.

Figure 6a shows a square tag 4 with four perspective targets 17. It is similar in structure to tags described by Bennett et al. in US Patent 5051746. The tag represents sixty 4-bit Reed-Solomon symbols 47, for a total of 240 bits. The tag represents each one
20 bit as a dot 48, and each zero bit by the absence of the corresponding dot. The perspective targets are designed to be shared between adjacent tags, as shown in Figures 6b and 6c. Figure 6b shows a square tiling of 16 tags and the corresponding minimum field of view 193, which must span the diagonals of two tags. Figure 6c shows a square tiling of nine tags, containing all one bits for illustration purposes.

25 Using a (15, 7) Reed-Solomon code, 112 bits of tag data are redundantly encoded to produce 240 encoded bits. The four codewords are interleaved spatially within the tag to maximize resilience to burst errors. Assuming a 16-bit tag ID as before, this allows a region ID of up to 92 bits.

The data-bearing dots 48 of the tag are designed to not overlap their neighbors,
30 so that groups of tags cannot produce structures which resemble targets. This also saves

ink. The perspective targets therefore allow detection of the tag, so further targets are not required. Tag image processing proceeds as described in section 1.2.4 above, with the exception that steps 26 and 28 are omitted.

Although the tag may contain an orientation feature to allow disambiguation of the four possible orientations of the tag relative to the sensor, it is also possible to embed orientation data in the tag data. For example, the four codewords can be arranged so that each tag orientation contains one codeword placed at that orientation, as shown in Figure 6d, where each symbol is labelled with the number of its codeword (1-4) and the position of the symbol within the codeword (A-O). Tag decoding then consists of decoding one codeword at each orientation. Each codeword can either contain a single bit indicating whether it is the first codeword, or two bits indicating which codeword it is. The latter approach has the advantage that if, say, the data content of only one codeword is required, then at most two codewords need to be decoded to obtain the desired data. This may be the case if the region ID is not expected to change within a stroke and is thus only decoded at the start of a stroke. Within a stroke only the codeword containing the tag ID is then desired. Furthermore, since the rotation of the sensing device changes slowly and predictably within a stroke, only one codeword typically needs to be decoded per frame.

It is possible to dispense with perspective targets altogether and instead rely on the data representation being self-registering. In this case each bit value (or multi-bit value) is typically represented by an explicit glyph, i.e. no bit value is represented by the absence of a glyph. This ensures that the data grid is well-populated, and thus allows the grid to be reliably identified and its perspective distortion detected and subsequently corrected during data sampling. To allow tag boundaries to be detected, each tag data must contain a marker pattern, and these must be redundantly encoded to allow reliable detection. The overhead of such marker patterns is similar to the overhead of explicit perspective targets. One such scheme uses dots positioned at various points relative to grid vertices to represent different glyphs and hence different multi-bit values (see Anoto Technology Description, Anoto April 2000).

1.2.6 Tag Map

Decoding a tag results in a region ID, a tag ID, and a tag-relative pen transform.

Before the tag ID and the tag-relative pen location can be translated into an absolute location within the tagged region, the location of the tag within the region must be known. This is given by a tag map, a function which maps each tag ID in a tagged region to a corresponding location. The tag map class diagram is shown in Figure 22, as part of the netpage printer class diagram.

A tag map reflects the scheme used to tile the surface region with tags, and this can vary according to surface type. When multiple tagged regions share the same tiling scheme and the same tag numbering scheme, they can also share the same tag map.

The tag map for a region must be retrievable via the region ID. Thus, given a region ID, a tag ID and a pen transform, the tag map can be retrieved, the tag ID can be translated into an absolute tag location within the region, and the tag-relative pen location can be added to the tag location to yield an absolute pen location within the region.

The tag ID may have a structure which assists translation through the tag map. It may, for example, encoded cartesian coordinates or polar coordinates, depending on the surface type on which it appears. The tag ID structure is dictated by and known to the tag map, and tag IDs associated with different tag maps may therefore have different structures.

1.2.7 Tagging Schemes

Two distinct surface coding schemes are of interest, both of which use the tag structure described earlier in this section. The preferred coding scheme uses “location-indicating” tags as already discussed. An alternative coding scheme uses object-indicating tags.

A location-indicating tag contains a tag ID which, when translated through the tag map associated with the tagged region, yields a unique tag location within the region. The tag-relative location of the pen is added to this tag location to yield the location of the pen within the region. This in turn is used to determine the location of the pen relative to a user interface element in the page description associated with the region. Not only is the user interface element itself identified, but a location relative to the user interface element is identified. Location-indicating tags therefore trivially support the

capture of an absolute pen path in the zone of a particular user interface element.

An object-indicating tag contains a tag ID which directly identifies a user interface element in the page description associated with the region. All the tags in the zone of the user interface element identify the user interface element, making them all identical and therefore indistinguishable. Object-indicating tags do not, therefore, support the capture of an absolute pen path. They do, however, support the capture of a relative pen path. So long as the position sampling frequency exceeds twice the encountered tag frequency, the displacement from one sampled pen position to the next within a stroke can be unambiguously determined.

With either tagging scheme, the tags function in cooperation with associated visual elements on the netpage as user interactive elements in that a user can interact with the printed page using an appropriate sensing device in order for tag data to be read by the sensing device and for an appropriate response to be generated in the netpage system.

1.3 DOCUMENT AND PAGE DESCRIPTIONS

A preferred embodiment of a document and page description class diagram is shown in Figures 25 and 26.

In the netpage system a document is described at three levels. At the most abstract level the document 836 has a hierarchical structure whose terminal elements 839 are associated with content objects 840 such as text objects, text style objects, image objects, etc. Once the document is printed on a printer with a particular page size and according to a particular user's scale factor preference, the document is paginated and otherwise formatted. Formatted terminal elements 835 will in some cases be associated with content objects which are different from those associated with their corresponding terminal elements, particularly where the content objects are style-related. Each printed instance of a document and page is also described separately, to allow input captured through a particular page instance 830 to be recorded separately from input captured through other instances of the same page description.

The presence of the most abstract document description on the page server allows a user to request a copy of a document without being forced to accept the source

document's specific format. The user may be requesting a copy through a printer with a different page size, for example. Conversely, the presence of the formatted document description on the page server allows the page server to efficiently interpret user actions on a particular printed page.

- 5 A formatted document 834 consists of a set of formatted page descriptions 5, each of which consists of a set of formatted terminal elements 835. Each formatted element has a spatial extent or zone 58 on the page. This defines the active area of input elements such as hyperlinks and input fields.

- 10 A document instance 831 corresponds to a formatted document 834. It consists of a set of page instances 830, each of which corresponds to a page description 5 of the formatted document. Each page instance 830 describes a single unique printed netpage 1, and records the page ID 50 of the netpage. A page instance is not part of a document instance if it represents a copy of a page requested in isolation.

- 15 A page instance consists of a set of terminal element instances 832. An element instance only exists if it records instance-specific information. Thus, a hyperlink instance exists for a hyperlink element because it records a transaction ID 55 which is specific to the page instance, and a field instance exists for a field element because it records input specific to the page instance. An element instance does not exist, however, for static elements such as textflows.

- 20 A terminal element can be a static element 843, a hyperlink element 844, a field element 845 or a page server command element 846, as shown in Figure 27. A static element 843 can be a style element 847 with an associated style object 854, a textflow element 848 with an associated styled text object 855, an image element 849 with an associated image element 856, a graphic element 850 with an associated graphic object 857, a video clip element 851 with an associated video clip object 858, an audio clip element 852 with an associated audio clip object 859, or a script element 853 with an associated script object 860, as shown in Figure 28.

A page instance has a background field 833 which is used to record any digital ink captured on the page which does not apply to a specific input element.

- 30 In the preferred form of the invention, a tag map 811 is associated with each

page instance to allow tags on the page to be translated into locations on the page.

1.4 THE NETPAGE NETWORK

In a preferred embodiment, a netpage network consists of a distributed set of netpage page servers 10, netpage registration servers 11, netpage ID servers 12, netpage application servers 13, netpage publication servers 14, and netpage printers 601 connected via a network 19 such as the Internet, as shown in Figure 3.

The netpage registration server 11 is a server which records relationships between users, pens, printers, applications and publications, and thereby authorizes various network activities. It authenticates users and acts as a signing proxy on behalf of authenticated users in application transactions. It also provides handwriting recognition services. As described above, a netpage page server 10 maintains persistent information about page descriptions and page instances. The netpage network includes any number of page servers, each handling a subset of page instances. Since a page server also maintains user input values for each page instance, clients such as netpage printers send netpage input directly to the appropriate page server. The page server interprets any such input relative to the description of the corresponding page.

A netpage ID server 12 allocates document IDs 51 on demand, and provides load-balancing of page servers via its ID allocation scheme.

A netpage printer uses the Internet Distributed Name System (DNS), or similar, to resolve a netpage page ID 50 into the network address of the netpage page server handling the corresponding page instance.

A netpage application server 13 is a server which hosts interactive netpage applications. A netpage publication server 14 is an application server which publishes netpage documents to netpage printers. They are described in detail in Section 2.

Netpage servers can be hosted on a variety of network server platforms from manufacturers such as IBM, Hewlett-Packard, and Sun. Multiple netpage servers can run concurrently on a single host, and a single server can be distributed over a number of hosts. Some or all of the functionality provided by netpage servers, and in particular the functionality provided by the ID server and the page server, can also be provided directly in a netpage appliance such as a netpage printer, in a computer workstation, or on a local

network.

1.5 THE NETPAGE PRINTER

The netpage printer 601 is an appliance which is registered with the netpage system and prints netpage documents on demand and via subscription. Each printer has a
5 unique printer ID 62, and is connected to the netpage network via a network such as the Internet, ideally via a broadband connection.

Apart from identity and security settings in non-volatile memory, the netpage printer contains no persistent storage. As far as a user is concerned, "the network is the computer". Netpages function interactively across space and time with the help of the
10 distributed netpage page servers 10, independently of particular netpage printers.

The netpage printer receives subscribed netpage documents from netpage publication servers 14. Each document is distributed in two parts: the page layouts, and the actual text and image objects which populate the pages. Because of personalization, page layouts are typically specific to a particular subscriber and so are pointcast to the
15 subscriber's printer via the appropriate page server. Text and image objects, on the other hand, are typically shared with other subscribers, and so are multicast to all subscribers' printers and the appropriate page servers.

The netpage publication server optimizes the segmentation of document content into pointcasts and multicasts. After receiving the pointcast of a document's page
20 layouts, the printer knows which multicasts, if any, to listen to.

Once the printer has received the complete page layouts and objects that define the document to be printed, it can print the document.

The printer rasterizes and prints odd and even pages simultaneously on both sides of the sheet. It contains duplexed print engine controllers 760 and print engines
25 utilizing Memjet™ printheads 350 for this purpose.

The printing process consists of two decoupled stages: rasterization of page descriptions, and expansion and printing of page images. The raster image processor (RIP) consists of one or more standard DSPs 757 running in parallel. The duplexed print engine controllers consist of custom processors which expand, dither and print page
30 images in real time, synchronized with the operation of the printheads in the print

engines.

Printers not enabled for IR printing have the option to print tags using IR-absorptive black ink, although this restricts tags to otherwise empty areas of the page. Although such pages have more limited functionality than IR-printed pages, they are still
5 classed as netpages.

A normal netpage printer prints netpages on sheets of paper. More specialised netpage printers may print onto more specialised surfaces, such as globes. Each printer supports at least one surface type, and supports at least one tag tiling scheme, and hence tag map, for each surface type. The tag map 811 which describes the tag tiling scheme
10 actually used to print a document becomes associated with that document so that the document's tags can be correctly interpreted.

Figure 2 shows the netpage printer class diagram, reflecting printer-related information maintained by a registration server 11 on the netpage network.

A preferred embodiment of the netpage printer is described in greater detail in
15 Section 6 below, with reference to Figures 11 to 16.

1.5.1 Memjet™ Printheads

The netpage system can operate using printers made with a wide range of digital printing technologies, including thermal inkjet, piezoelectric inkjet, laser electrophotographic, and others. However, for wide consumer acceptance, it is desirable
20 that a netpage printer have the following characteristics:

- photographic quality color printing
- high quality text printing
- high reliability
- low printer cost
- 25 • low ink cost
- low paper cost
- simple operation
- nearly silent printing

- high printing speed
- simultaneous double sided printing
- compact form factor
- low power consumption

5 No commercially available printing technology has all of these characteristics.

To enable to production of printers with these characteristics, the present applicant has invented a new print technology, referred to as Memjet™ technology. Memjet™ is a drop-on-demand inkjet technology that incorporates pagewidth printheads fabricated using microelectromechanical systems (MEMS) technology. Figure 17 shows
10 a single printing element 300 of a Memjet™ printhead. The netpage wallprinter incorporates 168960 printing elements 300 to form a 1600 dpi pagewidth duplex printer. This printer simultaneously prints cyan, magenta, yellow, black, and infrared inks as well as paper conditioner and ink fixative.

The printing element 300 is approximately 110 microns long by 32 microns
15 wide. Arrays of these printing elements are formed on a silicon substrate 301 that incorporates CMOS logic, data transfer, timing, and drive circuits (not shown).

Major elements of the printing element 300 are the nozzle 302, the nozzle rim 303, the nozzle chamber 304, the fluidic seal 305, the ink channel rim 306, the lever arm 307, the active actuator beam pair 308, the passive actuator beam pair 309, the active
20 actuator anchor 310, the passive actuator anchor 311, and the ink inlet 312.

The active actuator beam pair 308 is mechanically joined to the passive actuator beam pair 309 at the join 319. Both beams pairs are anchored at their respective anchor points 310 and 311. The combination of elements 308, 309, 310, 311, and 319 form a cantilevered electrothermal bend actuator 320.

25 Figure 18 shows a small part of an array of printing elements 300, including a cross section 315 of a printing element 300. The cross section 315 is shown without ink, to clearly show the ink inlet 312 that passes through the silicon wafer 301.

Figures 19(a), 19(b) and 19(c) show the operating cycle of a Memjet™ printing element 300.

Figure 19(a) shows the quiescent position of the ink meniscus 316 prior to printing an ink droplet. Ink is retained in the nozzle chamber by surface tension at the ink meniscus 316 and at the fluidic seal 305 formed between the nozzle chamber 304 and the ink channel rim 306.

5 While printing, the printhead CMOS circuitry distributes data from the print engine controller to the correct printing element, latches the data, and buffers the data to drive the electrodes 318 of the active actuator beam pair 308. This causes an electrical current to pass through the beam pair 308 for about one microsecond, resulting in Joule heating. The temperature increase resulting from Joule heating causes the beam pair 308
10 to expand. As the passive actuator beam pair 309 is not heated, it does not expand, resulting in a stress difference between the two beam pairs. This stress difference is partially resolved by the cantilevered end of the electrothermal bend actuator 320 bending towards the substrate 301. The lever arm 307 transmits this movement to the nozzle chamber 304. The nozzle chamber 304 moves about two microns to the position
15 shown in Figure 19(b). This increases the ink pressure, forcing ink 321 out of the nozzle 302, and causing the ink meniscus 316 to bulge. The nozzle rim 303 prevents the ink meniscus 316 from spreading across the surface of the nozzle chamber 304.

As the temperature of the beam pairs 308 and 309 equalizes, the actuator 320 returns to its original position. This aids in the break-off of the ink droplet 317 from the
20 ink 321 in the nozzle chamber, as shown in Figure 19(c). The nozzle chamber is refilled by the action of the surface tension at the meniscus 316.

Figure 20 shows a segment of a printhead 350. In a netpage printer, the length of the printhead is the full width of the paper (typically 210 mm) in the direction 351. The segment shown is 0.4 mm long (about 0.2% of a complete printhead). When
25 printing, the paper is moved past the fixed printhead in the direction 352. The printhead has 6 rows of interdigitated printing elements 300, printing the six colors or types of ink supplied by the ink inlets 312.

To protect the fragile surface of the printhead during operation, a nozzle guard wafer 330 is attached to the printhead substrate 301. For each nozzle 302 there is a
30 corresponding nozzle guard hole 331 through which the ink droplets are fired. To prevent the nozzle guard holes 331 from becoming blocked by paper fibers or other debris,

filtered air is pumped through the air inlets 332 and out of the nozzle guard holes during printing. To prevent ink 321 from drying, the nozzle guard is sealed while the printer is idle.

1.6 The Netpage Pen

5 The active sensing device of the netpage system is typically a pen 101, which, using its embedded controller 134, is able to capture and decode IR position tags from a page via an image sensor. The image sensor is a solid-state device provided with an appropriate filter to permit sensing at only near-infrared wavelengths. As described in more detail below, the system is able to sense when the nib is in contact with the surface,
10 and the pen is able to sense tags at a sufficient rate to capture human handwriting (i.e. at 200 dpi or greater and 100 Hz or faster). Information captured by the pen is encrypted and wirelessly transmitted to the printer (or base station), the printer or base station interpreting the data with respect to the (known) page structure.

 The preferred embodiment of the netpage pen operates both as a normal
15 marking ink pen and as a non-marking stylus. The marking aspect, however, is not necessary for using the netpage system as a browsing system, such as when it is used as an Internet interface. Each netpage pen is registered with the netpage system and has a unique pen ID 61. Figure 23 shows the netpage pen class diagram, reflecting pen-related information maintained by a registration server 11 on the netpage network.

20 When either nib is in contact with a netpage, the pen determines its position and orientation relative to the page. The nib is attached to a force sensor, and the force on the nib is interpreted relative to a threshold to indicate whether the pen is “up” or “down”. This allows a interactive element on the page to be ‘clicked’ by pressing with the pen nib, in order to request, say, information from a network. Furthermore, the force
25 is captured as a continuous value to allow, say, the full dynamics of a signature to be verified.

 The pen determines the position and orientation of its nib on the netpage by imaging, in the infrared spectrum, an area 193 of the page in the vicinity of the nib. It decodes the nearest tag and computes the position of the nib relative to the tag from the
30 observed perspective distortion on the imaged tag and the known geometry of the pen optics. Although the position resolution of the tag may be low, because the tag density

on the page is inversely proportional to the tag size, the adjusted position resolution is quite high, exceeding the minimum resolution required for accurate handwriting recognition.

Pen actions relative to a netpage are captured as a series of strokes. A stroke
5 consists of a sequence of time-stamped pen positions on the page, initiated by a pen-down event and completed by the subsequent pen-up event. A stroke is also tagged with the page ID 50 of the netpage whenever the page ID changes, which, under normal circumstances, is at the commencement of the stroke.

Each netpage pen has a current selection 826 associated with it, allowing the
10 user to perform copy and paste operations etc. The selection is timestamped to allow the system to discard it after a defined time period. The current selection describes a region of a page instance. It consists of the most recent digital ink stroke captured through the pen relative to the background area of the page. It is interpreted in an application-specific manner once it is submitted to an application via a selection hyperlink activation.

Each pen has a current nib 824. This is the nib last notified by the pen to the
15 system. In the case of the default netpage pen described above, either the marking black ink nib or the non-marking stylus nib is current. Each pen also has a current nib style 825. This is the nib style last associated with the pen by an application, e.g. in response to the user selecting a color from a palette. The default nib style is the nib style
20 associated with the current nib. Strokes captured through a pen are tagged with the current nib style. When the strokes are subsequently reproduced, they are reproduced in the nib style with which they are tagged.

Whenever the pen is within range of a printer with which it can communicate,
the pen slowly flashes its "online" LED. When the pen fails to decode a stroke relative to
25 the page, it momentarily activates its "error" LED. When the pen succeeds in decoding a stroke relative to the page, it momentarily activates its "ok" LED.

A sequence of captured strokes is referred to as digital ink. Digital ink forms
the basis for the digital exchange of drawings and handwriting, for online recognition of
handwriting, and for online verification of signatures.

30 The pen is wireless and transmits digital ink to the netpage printer via a short-

range radio link. The transmitted digital ink is encrypted for privacy and security and packetized for efficient transmission, but is always flushed on a pen-up event to ensure timely handling in the printer.

When the pen is out-of-range of a printer it buffers digital ink in internal
5 memory, which has a capacity of over ten minutes of continuous handwriting. When the pen is once again within range of a printer, it transfers any buffered digital ink.

A pen can be registered with any number of printers, but because all state data resides in netpages both on paper and on the network, it is largely immaterial which printer a pen is communicating with at any particular time.

10 A preferred embodiment of the pen is described in greater detail in Section 6 below, with reference to Figures 8 to 10.

1.7 NETPAGE INTERACTION

The netpage printer 601 receives data relating to a stroke from the pen 101
when the pen is used to interact with a netpage 1. The coded data 3 of the tags 4 is read
15 by the pen when it is used to execute a movement, such as a stroke. The data allows the identity of the particular page and associated interactive element to be determined and an indication of the relative positioning of the pen relative to the page to be obtained. The indicating data is transmitted to the printer, where it resolves, via the DNS, the page ID 50 of the stroke into the network address of the netpage page server 10 which maintains
20 the corresponding page instance 830. It then transmits the stroke to the page server. If the page was recently identified in an earlier stroke, then the printer may already have the address of the relevant page server in its cache. Each netpage consists of a compact page layout maintained persistently by a netpage page server (see below). The page layout refers to objects such as images, fonts and pieces of text, typically stored elsewhere on
25 the netpage network.

When the page server receives the stroke from the pen, it retrieves the page description to which the stroke applies, and determines which element of the page description the stroke intersects. It is then able to interpret the stroke in the context of the type of the relevant element.

30 A "click" is a stroke where the distance and time between the pen down

position and the subsequent pen up position are both less than some small maximum. An object which is activated by a click typically requires a click to be activated, and accordingly, a longer stroke is ignored. The failure of a pen action, such as a “sloppy” click, to register is indicated by the lack of response from the pen’s “ok” LED.

- 5 There are two kinds of input elements in a netpage page description: hyperlinks and form fields. Input through a form field can also trigger the activation of an associated hyperlink.

1.7.1 Hyperlinks

- 10 A hyperlink is a means of sending a message to a remote application, and typically elicits a printed response in the netpage system.

- 15 A hyperlink element 844 identifies the application 71 which handles activation of the hyperlink, a link ID 54 which identifies the hyperlink to the application, an “alias required” flag which asks the system to include the user’s application alias ID 65 in the hyperlink activation, and a description which is used when the hyperlink is recorded as a favorite or appears in the user’s history. The hyperlink element class diagram is shown in Figure 29.

- 20 When a hyperlink is activated, the page server sends a request to an application somewhere on the network. The application is identified by an application ID 64, and the application ID is resolved in the normal way via the DNS. There are three types of hyperlinks: general hyperlinks 863, form hyperlinks 865, and selection hyperlinks 864, as shown in Figure 30. A general hyperlink can implement a request for a linked document, or may simply signal a preference to a server. A form hyperlink submits the corresponding form to the application. A selection hyperlink submits the current selection to the application. If the current selection contains a single-word piece of text, 25 for example, the application may return a single-page document giving the word’s meaning within the context in which it appears, or a translation into a different language. Each hyperlink type is characterized by what information is submitted to the application.

- 30 The corresponding hyperlink instance 862 records a transaction ID 55 which can be specific to the page instance on which the hyperlink instance appears. The transaction ID can identify user-specific data to the application, for example a “shopping

cart” of pending purchases maintained by a purchasing application on behalf of the user.

The system includes the pen’s current selection 826 in a selection hyperlink activation. The system includes the content of the associated form instance 868 in a form hyperlink activation, although if the hyperlink has its “submit delta” attribute set, only
5 input since the last form submission is included. The system includes an effective return path in all hyperlink activations.

A hyperlinked group 866 is a group element 838 which has an associated hyperlink, as shown in Figure 31. When input occurs through any field element in the group, the hyperlink 844 associated with the group is activated. A hyperlinked group can
10 be used to associate hyperlink behavior with a field such as a checkbox. It can also be used, in conjunction with the “submit delta” attribute of a form hyperlink, to provide continuous input to an application. It can therefore be used to support a “blackboard” interaction model, i.e. where input is captured and therefore shared as soon as it occurs.

1.7.2 Forms

15 A form defines a collection of related input fields used to capture a related set of inputs through a printed netpage. A form allows a user to submit one or more parameters to an application software program running on a server.

A form 867 is a group element 838 in the document hierarchy. It ultimately contains a set of terminal field elements 839. A form instance 868 represents a printed
20 instance of a form. It consists of a set of field instances 870 which correspond to the field elements 845 of the form. Each field instance has an associated value 871, whose type depends on the type of the corresponding field element. Each field value records input through a particular printed form instance, i.e. through one or more printed netpages. The form class diagram is shown in Figure 32.

25 Each form instance has a status 872 which indicates whether the form is active, frozen, submitted, void or expired. A form is active when first printed. A form becomes frozen once it is signed or once its freeze time is reached. A form becomes submitted once one of its submission hyperlinks has been activated, unless the hyperlink has its “submit delta” attribute set. A form becomes void when the user invokes a void form,
30 reset form or duplicate form page command. A form expires when its specified expiry

time is reached, i.e. when the time the form has been active exceeds the form's specified lifetime. While the form is active, form input is allowed. Input through a form which is not active is instead captured in the background field 833 of the relevant page instance. When the form is active or frozen, form submission is allowed. Any attempt to submit a
5 form when the form is not active or frozen is rejected, and instead elicits an form status report.

Each form instance is associated (at 59) with any form instances derived from it, thus providing a version history. This allows all but the latest version of a form in a particular time period to be excluded from a search.

10 All input is captured as digital ink. Digital ink 873 consists of a set of timestamped stroke groups 874, each of which consists of a set of styled strokes 875. Each stroke consists of a set of timestamped pen positions 876, each of which also includes pen orientation and nib force. The digital ink class diagram is shown in Figure 33.

15 A field element 845 can be a checkbox field 877, a text field 878, a drawing field 879, or a signature field 880. The field element class diagram is shown in Figure 34. Any digital ink captured in a field's zone 58 is assigned to the field.

A checkbox field has an associated boolean value 881, as shown in Figure 35. Any mark (a tick, a cross, a stroke, a fill zigzag, etc.) captured in a checkbox field's zone
20 causes a true value to be assigned to the field's value.

A text field has an associated text value 882, as shown in Figure 36. Any digital ink captured in a text field's zone is automatically converted to text via online handwriting recognition, and the text is assigned to the field's value. Online handwriting recognition is well-understood (see, for example, Tappert, C., C.Y. Suen and T.
25 Wakahara, "The State of the Art in On-Line Handwriting Recognition", IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol.12, No.8, August 1990, the contents of which are herein incorporated by cross-reference).

A signature field has an associated digital signature value 883, as shown in Figure 37. Any digital ink captured in a signature field's zone is automatically verified
30 with respect to the identity of the owner of the pen, and a digital signature of the content

of the form of which the field is part is generated and assigned to the field's value. The digital signature is generated using the pen user's private signature key specific to the application which owns the form. Online signature verification is well-understood (see, for example, Plamondon, R. and G. Lorette, "Automatic Signature Verification and
5 Writer Identification – The State of the Art", Pattern Recognition, Vol.22, No.2, 1989, the contents of which are herein incorporated by cross-reference).

A field element is hidden if its "hidden" attribute is set. A hidden field element does not have an input zone on a page and does not accept input. It can have an associated field value which is included in the form data when the form containing the
10 field is submitted.

"Editing" commands, such as strike-throughs indicating deletion, can also be recognized in form fields.

Because the handwriting recognition algorithm works "online" (i.e. with access to the dynamics of the pen movement), rather than "offline" (i.e. with access only to a
15 bitmap of pen markings), it can recognize run-on discretely-written characters with relatively high accuracy, without a writer-dependent training phase. A writer-dependent model of handwriting is automatically generated over time, however, and can be generated up-front if necessary,

Digital ink, as already stated, consists of a sequence of strokes. Any stroke
20 which starts in a particular element's zone is appended to that element's digital ink stream, ready for interpretation. Any stroke not appended to an object's digital ink stream is appended to the background field's digital ink stream.

Digital ink captured in the background field is interpreted as a selection gesture. Circumscription of one or more objects is generally interpreted as a selection of
25 the circumscribed objects, although the actual interpretation is application-specific.

Table 2 summarises these various pen interactions with a netpage.

Table 2 - Summary of pen interactions with a netpage

Object	Type	Pen input	Action
Hyperlink	General	Click	Submit action to application
	Form	Click	Submit form to application

	Selection	Click	Submit selection to application
Form field	Checkbox	Any mark	Assign true to field
	Text	Handwriting	Convert digital ink to text; assign text to field
	Drawing	Digital ink	Assign digital ink to field
	Signature	Signature	Verify digital ink signature; generate digital signature of form; assign digital signature to field
None	-	Circumscription	Assign digital ink to current selection

The system maintains a current selection for each pen. The selection consists simply of the most recent stroke captured in the background field. The selection is cleared after an inactivity timeout to ensure predictable behavior.

- 5 The raw digital ink captured in every field is retained on the netpage page server and is optionally transmitted with the form data when the form is submitted to the application. This allows the application to interrogate the raw digital ink should it suspect the original conversion, such as the conversion of handwritten text. This can, for example, involve human intervention at the application level for forms which fail certain
- 10 application-specific consistency checks. As an extension to this, the entire background area of a form can be designated as a drawing field. The application can then decide, on the basis of the presence of digital ink outside the explicit fields of the form, to route the form to a human operator, on the assumption that the user may have indicated amendments to the filled-in fields outside of those fields.
- 15 Figure 38 shows a flowchart of the process of handling pen input relative to a netpage. The process consists of receiving (at 884) a stroke from the pen; identifying (at 885) the page instance 830 to which the page ID 50 in the stroke refers; retrieving (at 886) the page description 5; identifying (at 887) a formatted element 839 whose zone 58 the stroke intersects; determining (at 888) whether the formatted element corresponds to
- 20 a field element, and if so appending (at 892) the received stroke to the digital ink of the field value 871, interpreting (at 893) the accumulated digital ink of the field, and determining (at 894) whether the field is part of a hyperlinked group 866 and if so activating (at 895) the associated hyperlink; alternatively determining (at 889) whether the formatted element corresponds to a hyperlink element and if so activating (at 895)
- 25 the corresponding hyperlink; alternatively, in the absence of an input field or hyperlink,

appending (at 890) the received stroke to the digital ink of the background field 833; and copying (at 891) the received stroke to the current selection 826 of the current pen, as maintained by the registration server.

Figure 38a shows a detailed flowchart of step 893 in the process shown in Figure 38, where the accumulated digital ink of a field is interpreted according to the type of the field. The process consists of determining (at 896) whether the field is a checkbox and (at 897) whether the digital ink represents a checkmark, and if so assigning (at 898) a true value to the field value; alternatively determining (at 899) whether the field is a text field and if so converting (at 900) the digital ink to computer text, with the help of the appropriate registration server, and assigning (at 901) the converted computer text to the field value; alternatively determining (at 902) whether the field is a signature field and if so verifying (at 903) the digital ink as the signature of the pen's owner, with the help of the appropriate registration server, creating (at 904) a digital signature of the contents of the corresponding form, also with the help of the registration server and using the pen owner's private signature key relating to the corresponding application, and assigning (at 905) the digital signature to the field value.

1.7.3 Page Server Commands

A page server command is a command which is handled locally by the page server. It operates directly on form, page and document instances.

A page server command 907 can be a void form command 908, a duplicate form command 909, a reset form command 910, a get form status command 911, a duplicate page command 912, a reset page command 913, a get page status command 914, a duplicate document command 915, a reset document command 916, or a get document status command 917, as shown in Figure 39.

A void form command voids the corresponding form instance. A duplicate form command voids the corresponding form instance and then produces an active printed copy of the current form instance with field values preserved. The copy contains the same hyperlink transaction IDs as the original, and so is indistinguishable from the original to an application. A reset form command voids the corresponding form instance and then produces an active printed copy of the form instance with field values discarded. A get form status command produces a printed report on the status of the

corresponding form instance, including who published it, when it was printed, for whom it was printed, and the form status of the form instance.

Since a form hyperlink instance contains a transaction ID, the application has to be involved in producing a new form instance. A button requesting a new form instance
5 is therefore typically implemented as a hyperlink.

A duplicate page command produces a printed copy of the corresponding page instance with the background field value preserved. If the page contains a form or is part of a form, then the duplicate page command is interpreted as a duplicate form command. A reset page command produces a printed copy of the corresponding page instance with
10 the background field value discarded. If the page contains a form or is part of a form, then the reset page command is interpreted as a reset form command. A get page status command produces a printed report on the status of the corresponding page instance, including who published it, when it was printed, for whom it was printed, and the status of any forms it contains or is part of.

15 The netpage logo which appears on every netpage is usually associated with a duplicate page element.

When a page instance is duplicated with field values preserved, field values are printed in their native form, i.e. a checkmark appears as a standard checkmark graphic, and text appears as typeset text. Only drawings and signatures appear in their original
20 form, with a signature accompanied by a standard graphic indicating successful signature verification.

A duplicate document command produces a printed copy of the corresponding document instance with background field values preserved. If the document contains any forms, then the duplicate document command duplicates the forms in the same way a
25 duplicate form command does. A reset document command produces a printed copy of the corresponding document instance with background field values discarded. If the document contains any forms, then the reset document command resets the forms in the same way a reset form command does. A get document status command produces a printed report on the status of the corresponding document instance, including who
30 published it, when it was printed, for whom it was printed, and the status of any forms it contains.

If the page server command's "on selected" attribute is set, then the command operates on the page identified by the pen's current selection rather than on the page containing the command. This allows a menu of page server commands to be printed. If the target page doesn't contain a page server command element for the designated page server command, then the command is ignored.

An application can provide application-specific handling by embedding the relevant page server command element in a hyperlinked group. The page server activates the hyperlink associated with the hyperlinked group rather than executing the page server command.

A page server command element is hidden if its "hidden" attribute is set. A hidden command element does not have an input zone on a page and so cannot be activated directly by a user. It can, however, be activated via a page server command embedded in a different page, if that page server command has its "on selected" attribute set.

1.8 STANDARD FEATURES OF NETPAGES

In the preferred form, each netpage is printed with the netpage logo at the bottom to indicate that it is a netpage and therefore has interactive properties. The logo also acts as a copy button. In most cases pressing the logo produces a copy of the page. In the case of a form, the button produces a copy of the entire form. And in the case of a secure document, such as a ticket or coupon, the button elicits an explanatory note or advertising page.

The default single-page copy function is handled directly by the relevant netpage page server. Special copy functions are handled by linking the logo button to an application.

1.9 USER HELP SYSTEM

In a preferred embodiment, the netpage printer has a single button labelled "Help". When pressed it elicits a single help page of information, including:

- status of printer connection
- status of printer consumables

- top-level help menu
- document function menu
- top-level netpage network directory

5 The help menu provides a hierarchical manual on how to use the netpage system.

The document function menu includes the following functions:

- print a copy of a document
- print a clean copy of a form
- print the status of a document

10 A document function is initiated by selecting the document and then pressing the button. The status of a document indicates who published it and when, to whom it was delivered, and to whom and when it was subsequently submitted as a form.

The help page is obviously unavailable if the printer is unable to print. In this case the “error” light is lit and the user can request remote diagnosis over the network.

15 2 PERSONALIZED PUBLICATION MODEL

In the following description, news is used as a canonical publication example to illustrate personalization mechanisms in the netpage system. Although news is often used in the limited sense of newspaper and newsmagazine news, the intended scope in the present context is wider.

20 In the netpage system, the editorial content and the advertising content of a news publication are personalized using different mechanisms. The editorial content is personalized according to the reader’s explicitly stated and implicitly captured interest profile. The advertising content is personalized according to the reader’s locality and demographic.

25 2.1 EDITORIAL PERSONALIZATION

A subscriber can draw on two kinds of news sources: those that deliver news publications, and those that deliver news streams. While news publications are aggregated and edited by the publisher, news streams are aggregated either by a news

publisher or by a specialized news aggregator. News publications typically correspond to traditional newspapers and newsmagazines, while news streams can be many and varied: a “raw” news feed from a news service, a cartoon strip, a freelance writer’s column, a friend’s bulletin board, or the reader’s own e-mail.

5 The netpage publication server supports the publication of edited news publications as well as the aggregation of multiple news streams. By handling the aggregation and hence the formatting of news streams selected directly by the reader, the server is able to place advertising on pages over which it otherwise has no editorial control.

10 The subscriber builds a daily newspaper by selecting one or more contributing news publications, and creating a personalized version of each. The resulting daily editions are printed and bound together into a single newspaper. The various members of a household typically express their different interests and tastes by selecting different daily publications and then customizing them.

15 For each publication, the reader optionally selects specific sections. Some sections appear daily, while others appear weekly. The daily sections available from The New York Times online, for example, include “Page One Plus”, “National”, “International”, “Opinion”, “Business”, “Arts/Living”, “Technology”, and “Sports”. The set of available sections is specific to a publication, as is the default subset.

20 The reader can extend the daily newspaper by creating custom sections, each one drawing on any number of news streams. Custom sections might be created for e-mail and friends’ announcements (“Personal”), or for monitoring news feeds for specific topics (“Alerts” or “Clippings”).

25 For each section, the reader optionally specifies its size, either qualitatively (e.g. short, medium, or long), or numerically (i.e. as a limit on its number of pages), and the desired proportion of advertising, either qualitatively (e.g. high, normal, low, none), or numerically (i.e. as a percentage).

30 The reader also optionally expresses a preference for a large number of shorter articles or a small number of longer articles. Each article is ideally written (or edited) in both short and long forms to support this preference.

An article may also be written (or edited) in different versions to match the expected sophistication of the reader, for example to provide children's and adults' versions. The appropriate version is selected according to the reader's age. The reader can specify a "reading age" which takes precedence over their biological age.

5 The articles which make up each section are selected and prioritized by the editors, and each is assigned a useful lifetime. By default they are delivered to all relevant subscribers, in priority order, subject to space constraints in the subscribers' editions.

10 In sections where it is appropriate, the reader may optionally enable collaborative filtering. This is then applied to articles which have a sufficiently long lifetime. Each article which qualifies for collaborative filtering is printed with rating buttons at the end of the article. The buttons can provide an easy choice (e.g. "liked" and "disliked"), making it more likely that readers will bother to rate the article.

15 Articles with high priorities and short lifetimes are therefore effectively considered essential reading by the editors and are delivered to most relevant subscribers.

20 The reader optionally specifies a serendipity factor, either qualitatively (e.g. do or don't surprise me), or numerically. A high serendipity factor lowers the threshold used for matching during collaborative filtering. A high factor makes it more likely that the corresponding section will be filled to the reader's specified capacity. A different serendipity factor can be specified for different days of the week.

The reader also optionally specifies topics of particular interest within a section, and this modifies the priorities assigned by the editors.

25 The speed of the reader's Internet connection affects the quality at which images can be delivered. The reader optionally specifies a preference for fewer images or smaller images or both. If the number or size of images is not reduced, then images may be delivered at lower quality (i.e. at lower resolution or with greater compression).

30 At a global level, the reader specifies how quantities, dates, times and monetary values are localized. This involves specifying whether units are imperial or metric, a local timezone and time format, and a local currency, and whether the localization

consist of *in situ* translation or annotation. These preferences are derived from the reader's locality by default.

To reduce reading difficulties caused by poor eyesight, the reader optionally specifies a global preference for a larger presentation. Both text and images are scaled
5 accordingly, and less information is accommodated on each page.

The language in which a news publication is published, and its corresponding text encoding, is a property of the publication and not a preference expressed by the user. However, the netpage system can be configured to provide automatic translation services in various guises.

10 2.2 ADVERTISING LOCALIZATION AND TARGETING

The personalization of the editorial content directly affects the advertising content, because advertising is typically placed to exploit the editorial context. Travel ads, for example, are more likely to appear in a travel section than elsewhere. The value of the editorial content to an advertiser (and therefore to the publisher) lies in its ability
15 to attract large numbers of readers with the right demographics.

Effective advertising is placed on the basis of locality and demographics. Locality determines proximity to particular services, retailers etc., and particular interests and concerns associated with the local community and environment. Demographics determine general interests and preoccupations as well as likely spending patterns.

20 A news publisher's most profitable product is advertising "space", a multi-dimensional entity determined by the publication's geographic coverage, the size of its readership, its readership demographics, and the page area available for advertising.

In the netpage system, the netpage publication server computes the approximate multi-dimensional size of a publication's saleable advertising space on a
25 per-section basis, taking into account the publication's geographic coverage, the section's readership, the size of each reader's section edition, each reader's advertising proportion, and each reader's demographic.

In comparison with other media, the netpage system allows the advertising space to be defined in greater detail, and allows smaller pieces of it to be sold separately.
30 It therefore allows it to be sold at closer to its true value.

For example, the same advertising “slot” can be sold in varying proportions to several advertisers, with individual readers’ pages randomly receiving the advertisement of one advertiser or another, overall preserving the proportion of space sold to each advertiser.

- 5 The netpage system allows advertising to be linked directly to detailed product information and online purchasing. It therefore raises the intrinsic value of the advertising space.

- Because personalization and localization are handled automatically by netpage publication servers, an advertising aggregator can provide arbitrarily broad coverage of
10 both geography and demographics. The subsequent disaggregation is efficient because it is automatic. This makes it more cost-effective for publishers to deal with advertising aggregators than to directly capture advertising. Even though the advertising aggregator is taking a proportion of advertising revenue, publishers may find the change profit-neutral because of the greater efficiency of aggregation. The advertising aggregator acts
15 as an intermediary between advertisers and publishers, and may place the same advertisement in multiple publications.

- It is worth noting that ad placement in a netpage publication can be more complex than ad placement in the publication’s traditional counterpart, because the publication’s advertising space is more complex. While ignoring the full complexities of
20 negotiations between advertisers, advertising aggregators and publishers, the preferred form of the netpage system provides some automated support for these negotiations, including support for automated auctions of advertising space. Automation is particularly desirable for the placement of advertisements which generate small amounts of income, such as small or highly localized advertisements.

- 25 Once placement has been negotiated, the aggregator captures and edits the advertisement and records it on a netpage ad server. Correspondingly, the publisher records the ad placement on the relevant netpage publication server. When the netpage publication server lays out each user’s personalized publication, it picks the relevant advertisements from the netpage ad server.

2.3 USER PROFILES

2.3.1 Information Filtering

The personalization of news and other publications relies on an assortment of user-specific profile information, including:

- 5 • publication customizations
- collaborative filtering vectors
- contact details
- presentation preferences

The customization of a publication is typically publication-specific, and so the
10 customization information is maintained by the relevant netpage publication server.

A collaborative filtering vector consists of the user's ratings of a number of news items. It is used to correlate different users' interests for the purposes of making recommendations. Although there are benefits to maintaining a single collaborative filtering vector independently of any particular publication, there are two reasons why it
15 is more practical to maintain a separate vector for each publication: there is likely to be more overlap between the vectors of subscribers to the same publication than between those of subscribers to different publications; and a publication is likely to want to present its users' collaborative filtering vectors as part of the value of its brand, not to be found elsewhere. Collaborative filtering vectors are therefore also maintained by the
20 relevant netpage publication server.

Contact details, including name, street address, ZIP Code, state, country, telephone numbers, are global by nature, and are maintained by a netpage registration server.

Presentation preferences, including those for quantities, dates and times, are
25 likewise global and maintained in the same way.

The localization of advertising relies on the locality indicated in the user's contact details, while the targeting of advertising relies on personal information such as date of birth, gender, marital status, income, profession, education, or qualitative derivatives such as age range and income range.

For those users who choose to reveal personal information for advertising purposes, the information is maintained by the relevant netpage registration server. In the absence of such information, advertising can be targeted on the basis of the demographic associated with the user's ZIP or ZIP+4 Code.

5 Each user, pen, printer, application provider and application is assigned its own unique identifier, and the netpage registration server maintains the relationships between them, as shown in Figures 21, 22, 23 and 24. For registration purposes, a publisher is a special kind of application provider, and a publication is a special kind of application.

Each user 800 may be authorized to use any number of printers 802, and each
10 printer may allow any number of users to use it. Each user has a single default printer (at 66), to which periodical publications are delivered by default, whilst pages printed on demand are delivered to the printer through which the user is interacting. The server keeps track of which publishers a user has authorized to print to the user's default printer. A publisher does not record the ID of any particular printer, but instead resolves
15 the ID when it is required. The user may also be designated as having administrative privileges 69 on the printer, allowing the user to authorize other users to use the printer. This only has meaning if the printer requires administrative privileges 84 for such operations.

When a user subscribes 808 to a publication 807, the publisher 806 (i.e.
20 application provider 803) is authorized to print to a specified printer or the user's default printer. This authorization can be revoked at any time by the user. Each user may have several pens 801, but a pen is specific to a single user. If a user is authorized to use a particular printer, then that printer recognizes any of the user's pens.

The pen ID is used to locate the corresponding user profile maintained by a
25 particular netpage registration server, via the DNS in the usual way.

A Web terminal 809 can be authorized to print on a particular netpage printer, allowing Web pages and netpage documents encountered during Web browsing to be conveniently printed on the nearest netpage printer.

The netpage system can collect, on behalf of a printer provider, fees and
30 commissions on income earned through publications printed on the provider's printers.

Such income can include advertising fees, click-through fees, e-commerce commissions, and transaction fees. If the printer is owned by the user, then the user is the printer provider.

Each user also has a netpage account 820 which is used to accumulate micro-debits and credits (such as those described in the preceding paragraph); contact details 815, including name, address and telephone numbers; global preferences 816, including privacy, delivery and localization settings; any number of biometric records 817, containing the user's encoded signature 818, fingerprint 819 etc; a handwriting model 819 automatically maintained by the system; and SET payment card accounts 821, with which e-commerce payments can be made.

In addition to the user-specific netpage account, each user also has a netpage account 936 specific to each printer the user is authorized to use. Each printer-specific account is used to accumulate micro-debits and credits related to the user's activities on that printer. The user is billed on a regular basis for any outstanding debit balances.

A user optionally appears in the netpage user directory 823, allowing other users to locate and direct e-mail (etc.) to the user.

2.4 INTELLIGENT PAGE LAYOUT

The netpage publication server automatically lays out the pages of each user's personalized publication on a section-by-section basis. Since most advertisements are in the form of pre-formatted rectangles, they are placed on the page before the editorial content.

The advertising ratio for a section can be achieved with wildly varying advertising ratios on individual pages within the section, and the ad layout algorithm exploits this. The algorithm is configured to attempt to co-locate closely tied editorial and advertising content, such as placing ads for roofing material specifically within the publication because of a special feature on do-it-yourself roofing repairs.

The editorial content selected for the user, including text and associated images and graphics, is then laid out according to various aesthetic rules.

The entire process, including the selection of ads and the selection of editorial content, must be iterated once the layout has converged, to attempt to more closely

achieve the user's stated section size preference. The section size preference can, however, be matched *on average* over time, allowing significant day-to-day variations.

2.5 DOCUMENT FORMAT

Once the document is laid out, it is encoded for efficient distribution and
5 persistent storage on the netpage network.

The primary efficiency mechanism is the separation of information specific to a single user's edition and information shared between multiple users' editions. The specific information consists of the page layout. The shared information consists of the objects to which the page layout refers, including images, graphics, and pieces of text.

10 A text object contains fully-formatted text represented in the Extensible Markup Language (XML) using the Extensible Stylesheet Language (XSL). XSL provides precise control over text formatting independently of the region into which the text is being set, which in this case is being provided by the layout. The text object contains embedded language codes to enable automatic translation, and embedded
15 hyphenation hints to aid with paragraph formatting.

An image object encodes an image in the JPEG 2000 wavelet-based compressed image format. A graphic object encodes a 2D graphic in Scalable Vector Graphics (SVG) format.

The layout itself consists of a series of placed image and graphic objects, linked
20 textflow objects through which text objects flow, hyperlinks and input fields as described above, and watermark regions. These layout objects are summarized in Table 3. The layout uses a compact format suitable for efficient distribution and storage.

Table 3 - netpage layout objects

Layout object	Attribute	Format of linked object
Image	Position	-
	Image object ID	JPEG 2000
Graphic	Position	-
	Graphic object ID	SVG
Textflow	Textflow ID	-
	Zone	-

	Optional text object ID	XML/XSL
Hyperlink	Type	-
	Zone	-
	Application ID, etc.	-
Field	Type	-
	Meaning	-
	Zone	-
Watermark	Zone	-

2.6 DOCUMENT DISTRIBUTION

As described above, for purposes of efficient distribution and persistent storage on the netpage network, a user-specific page layout is separated from the shared objects to which it refers.

When a subscribed publication is ready to be distributed, the netpage publication server allocates, with the help of the netpage ID server 12, a unique ID for each page, page instance, document, and document instance.

The server computes a set of optimized subsets of the shared content and creates a multicast channel for each subset, and then tags each user-specific layout with the names of the multicast channels which will carry the shared content used by that layout. The server then pointcasts each user's layouts to that user's printer via the appropriate page server, and when the pointcasting is complete, multicasts the shared content on the specified channels. After receiving its pointcast, each page server and printer subscribes to the multicast channels specified in the page layouts. During the multicasts, each page server and printer extracts from the multicast streams those objects referred to by its page layouts. The page servers persistently archive the received page layouts and shared content.

Once a printer has received all the objects to which its page layouts refer, the printer re-creates the fully-populated layout and then rasterizes and prints it.

Under normal circumstances, the printer prints pages faster than they can be delivered. Assuming a quarter of each page is covered with images, the average page has a size of less than 400KB. The printer can therefore hold in excess of 100 such pages in its internal 64MB memory, allowing for temporary buffers etc. The printer prints at a rate of one page per second. This is equivalent to 400KB or about 3Mbit of page data per

second, which is similar to the highest expected rate of page data delivery over a broadband network.

Even under abnormal circumstances, such as when the printer runs out of paper, it is likely that the user will be able to replenish the paper supply before the
5 printer's 100-page internal storage capacity is exhausted.

However, if the printer's internal memory does fill up, then the printer will be unable to make use of a multicast when it first occurs. The netpage publication server therefore allows printers to submit requests for re-multicasts. When a critical number of requests is received or a timeout occurs, the server re-multicasts the corresponding
10 shared objects.

Once a document is printed, a printer can produce an exact duplicate at any time by retrieving its page layouts and contents from the relevant page server.

2.7 ON-DEMAND DOCUMENTS

When a netpage document is requested on demand, it can be personalized and
15 delivered in much the same way as a periodical. However, since there is no shared content, delivery is made directly to the requesting printer without the use of multicast.

When a non-netpage document is requested on demand, it is not personalized, and it is delivered via a designated netpage formatting server which reformats it as a netpage document. A netpage formatting server is a special instance of a netpage
20 publication server. The netpage formatting server has knowledge of various Internet document formats, including Adobe's Portable Document Format (PDF), and Hypertext Markup Language (HTML). In the case of HTML, it can make use of the higher resolution of the printed page to present Web pages in a multi-column format, with a table of contents. It can automatically include all Web pages directly linked to the
25 requested page. The user can tune this behavior via a preference.

The netpage formatting server makes standard netpage behavior, including interactivity and persistence, available on any Internet document, no matter what its origin and format. It hides knowledge of different document formats from both the netpage printer and the netpage page server, and hides knowledge of the netpage system
30 from Web servers.

3 SECURITY

3.1 CRYPTOGRAPHY

Cryptography is used to protect sensitive information, both in storage and in transit, and to authenticate parties to a transaction. There are two classes of cryptography
5 in widespread use: secret-key cryptography and public-key cryptography. The netpage network uses both classes of cryptography.

Secret-key cryptography, also referred to as symmetric cryptography, uses the same key to encrypt and decrypt a message. Two parties wishing to exchange messages must first arrange to securely exchange the secret key.

10 Public-key cryptography, also referred to as asymmetric cryptography, uses two encryption keys. The two keys are mathematically related in such a way that any message encrypted using one key can only be decrypted using the other key. One of these keys is then published, while the other is kept private. The public key is used to encrypt any message intended for the holder of the private key. Once encrypted using the public key,
15 a message can only be decrypted using the private key. Thus two parties can securely exchange messages without first having to exchange a secret key. To ensure that the private key is secure, it is normal for the holder of the private key to generate the key pair.

Public-key cryptography can be used to create a *digital signature*. The holder of
20 the private key can create a known hash of a message and then encrypt the hash using the private key. Anyone can then verify that the encrypted hash constitutes the “signature” of the holder of the private key with respect to that particular message by decrypting the encrypted hash using the public key and verifying the hash against the message. If the signature is appended to the message, then the recipient of the message can verify both
25 that the message is genuine and that it has not been altered in transit.

To make public-key cryptography work, there has to be a way to distribute public keys which prevents impersonation. This is normally done using certificates and certificate authorities. A certificate authority is a trusted third party which authenticates the connection between a public key and someone’s identity. The certificate authority
30 verifies the person’s identity by examining identity documents, and then creates and signs a digital certificate containing the person’s identity details and public key. Anyone

who trusts the certificate authority can use the public key in the certificate with a high degree of certainty that it is genuine. They just have to verify that the certificate has indeed been signed by the certificate authority, whose public key is well-known.

In most transaction environments, public-key cryptography is only used to
5 create digital signatures and to securely exchange secret session keys. Secret-key cryptography is used for all other purposes.

In the following discussion, when reference is made to the *secure* transmission
of information between a netpage printer and a server, what actually happens is that the
printer obtains the server's certificate, authenticates it with reference to the certificate
10 authority, uses the public key-exchange key in the certificate to exchange a secret session
key with the server, and then uses the secret session key to encrypt the message data. A
session key, by definition, can have an arbitrarily short lifetime.

3.2 NETPAGE PRINTER SECURITY

Each netpage printer is assigned a pair of unique identifiers at time of
15 manufacture which are stored in read-only memory in the printer and in the netpage
registration server database. The first ID 62 is public and uniquely identifies the printer
on the netpage network. The second ID is secret and is used when the printer is first
registered on the network.

When the printer connects to the netpage network for the first time after
20 installation, it creates a signature public/private key pair. It transmits the secret ID and
the public key securely to the netpage registration server. The server compares the secret
ID against the printer's secret ID recorded in its database, and accepts the registration if
the IDs match. It then creates and signs a certificate containing the printer's public ID
and public signature key, and stores the certificate in the registration database.

25 The netpage registration server acts as a certificate authority for netpage
printers, since it has access to secret information allowing it to verify printer identity.

When a user subscribes to a publication, a record is created in the netpage
registration server database authorizing the publisher to print the publication to the user's
default printer or a specified printer. Every document sent to a printer via a page server is
30 addressed to a particular user and is signed by the publisher using the publisher's private

signature key. The page server verifies, via the registration database, that the publisher is authorized to deliver the publication to the specified user. The page server verifies the signature using the publisher's public key, obtained from the publisher's certificate stored in the registration database.

- 5 The netpage registration server accepts requests to add printing authorizations to the database, so long as those requests are initiated via a pen registered to the printer.

3.3 NETPAGE PEN SECURITY

Each netpage pen is assigned a unique identifier at time of manufacture which is stored in read-only memory in the pen and in the netpage registration server database.

- 10 The pen ID 61 uniquely identifies the pen on the netpage network.

A netpage pen can "know" a number of netpage printers, and a printer can "know" a number of pens. A pen communicates with a printer via a radio frequency signal whenever it is within range of the printer. Once a pen and printer are registered, they regularly exchange session keys. Whenever the pen transmits digital ink to the
15 printer, the digital ink is always encrypted using the appropriate session key. Digital ink is never transmitted in the clear.

A pen stores a session key for every printer it knows, indexed by printer ID, and a printer stores a session key for every pen it knows, indexed by pen ID. Both have a large but finite storage capacity for session keys, and will forget a session key on a least-
20 recently-used basis if necessary.

When a pen comes within range of a printer, the pen and printer discover whether they know each other. If they don't know each other, then the printer determines whether it is supposed to know the pen. This might be, for example, because the pen belongs to a user who is registered to use the printer. If the printer is meant to know the
25 pen but doesn't, then it initiates the automatic pen registration procedure. If the printer isn't meant to know the pen, then it agrees with the pen to ignore it until the pen is placed in a charging cup, at which time it initiates the registration procedure.

In addition to its public ID, the pen contains a secret key-exchange key. The key-exchange key is also recorded in the netpage registration server database at time of
30 manufacture. During registration, the pen transmits its pen ID to the printer, and the

printer transmits the pen ID to the netpage registration server. The server generates a session key for the printer and pen to use, and securely transmits the session key to the printer. It also transmits a copy of the session key encrypted with the pen's key-exchange key. The printer stores the session key internally, indexed by the pen ID, and transmits
5 the encrypted session key to the pen. The pen stores the session key internally, indexed by the printer ID.

Although a fake pen can impersonate a pen in the pen registration protocol, only a real pen can decrypt the session key transmitted by the printer.

When a previously unregistered pen is first registered, it is of limited use until
10 it is linked to a user. A registered but "un-owned" pen is only allowed to be used to request and fill in netpage user and pen registration forms, to register a new user to which the new pen is automatically linked, or to add a new pen to an existing user.

The pen uses secret-key rather than public-key encryption because of hardware performance constraints in the pen.

15 **3.4 SECURE DOCUMENTS**

The netpage system supports the delivery of secure documents such as tickets and coupons. The netpage printer includes a facility to print watermarks, but will only do so on request from publishers who are suitably authorized. The publisher indicates its authority to print watermarks in its certificate, which the printer is able to authenticate.

20 The "watermark" printing process uses an alternative dither matrix in specified "watermark" regions of the page. Back-to-back pages contain mirror-image watermark regions which coincide when printed. The dither matrices used in odd and even pages' watermark regions are designed to produce an interference effect when the regions are viewed together, achieved by looking *through* the printed sheet.

25 The effect is similar to a watermark in that it is not visible when looking at only one side of the page, and is lost when the page is copied by normal means.

Pages of secure documents cannot be copied using the built-in netpage copy mechanism described in Section 1.9 above. This extends to copying netpages on netpage-aware photocopiers.

30 Secure documents are typically generated as part of e-commerce transactions.

They can therefore include the user's photograph which was captured when the user registered biometric information with the netpage registration server, as described in Section 2.

When presented with a secure netpage document, the recipient can verify its authenticity by requesting its status in the usual way. The unique ID of a secure document is only valid for the lifetime of the document, and secure document IDs are allocated non-contiguously to prevent their prediction by opportunistic forgers. A secure document verification pen can be developed with built-in feedback on verification failure, to support easy point-of-presentation document verification.

Clearly neither the watermark nor the user's photograph are secure in a cryptographic sense. They simply provide a significant obstacle to casual forgery. Online document verification, particularly using a verification pen, provides an added level of security where it is needed, but is still not entirely immune to forgeries.

3.5 NON-REPUDIATION

In the netpage system, forms submitted by users are delivered reliably to forms handlers and are persistently archived on netpage page servers. It is therefore impossible for recipients to repudiate delivery.

E-commerce payments made through the system, as described in Section 4, are also impossible for the payee to repudiate.

4 ELECTRONIC COMMERCE MODEL

4.1 SECURE ELECTRONIC TRANSACTION (SET)

The netpage system uses the Secure Electronic Transaction (SET) system as one of its payment systems. SET, having been developed by MasterCard and Visa, is organized around payment cards, and this is reflected in the terminology. However, much of the system is independent of the type of accounts being used.

In SET, cardholders and merchants register with a certificate authority and are issued with certificates containing their public signature keys. The certificate authority verifies a cardholder's registration details with the card issuer as appropriate, and verifies a merchant's registration details with the acquirer as appropriate. Cardholders and

merchants store their respective private signature keys securely on their computers. During the payment process, these certificates are used to mutually authenticate a merchant and cardholder, and to authenticate them both to the payment gateway.

SET has not yet been adopted widely, partly because cardholder maintenance of
5 keys and certificates is considered burdensome. Interim solutions which maintain cardholder keys and certificates on a server and give the cardholder access via a password have met with some success.

4.2 SET PAYMENTS

In the netpage system the netpage registration server acts as a proxy for the
10 netpage user (i.e. the cardholder) in SET payment transactions.

The netpage system uses biometrics to authenticate the user and authorize SET payments. Because the system is pen-based, the biometric used is the user's on-line signature, consisting of time-varying pen position and pressure. A fingerprint biometric can also be used by designing a fingerprint sensor into the pen, although at a higher cost.
15 The type of biometric used only affects the capture of the biometric, not the authorization aspects of the system.

The first step to being able to make SET payments is to register the user's biometric with the netpage registration server. This is done in a controlled environment, for example a bank, where the biometric can be captured at the same time as the user's
20 identity is verified. The biometric is captured and stored in the registration database, linked to the user's record. The user's photograph is also optionally captured and linked to the record. The SET cardholder registration process is completed, and the resulting private signature key and certificate are stored in the database. The user's payment card information is also stored, giving the netpage registration server enough information to
25 act as the user's proxy in any SET payment transaction.

When the user eventually supplies the biometric to complete a payment, for example by signing a netpage order form, the printer securely transmits the order information, the pen ID and the biometric data to the netpage registration server. The server verifies the biometric with respect to the user identified by the pen ID, and from
30 then on acts as the user's proxy in completing the SET payment transaction.

4.3 MICRO-PAYMENTS

The netpage system includes a mechanism for micro-payments, to allow the user to be conveniently charged for printing low-cost documents on demand and for copying copyright documents, and possibly also to allow the user to be reimbursed for expenses incurred in printing advertising material. The latter depends on the level of subsidy already provided to the user.

When the user registers for e-commerce, a network account is established which aggregates micro-payments. The user receives a statement on a regular basis, and can settle any outstanding debit balance using the standard payment mechanism.

10 The network account can be extended to aggregate subscription fees for periodicals, which would also otherwise be presented to the user in the form of individual statements.

4.4 TRANSACTIONS

When a user requests a netpage in a particular application context, the application is able to embed a user-specific transaction ID 55 in the page. Subsequent input through the page is tagged with the transaction ID, and the application is thereby able to establish an appropriate context for the user's input.

When input occurs through a page which is not user-specific, however, the application must use the user's unique identity to establish a context. A typical example involves adding items from a pre-printed catalog page to the user's virtual "shopping cart". To protect the user's privacy, however, the unique user ID 60 known to the netpage system is not divulged to applications. This is to prevent different application providers from easily correlating independently accumulated behavioral data.

The netpage registration server instead maintains an anonymous relationship between a user and an application via a unique alias ID 65, as shown in Figure 24. Whenever the user activates a hyperlink tagged with the "registered" attribute, the netpage page server asks the netpage registration server to translate the associated application ID 64, together with the pen ID 61, into an alias ID 65. The alias ID is then submitted to the hyperlink's application.

30 The application maintains state information indexed by alias ID, and is able to

retrieve user-specific state information without knowledge of the global identity of the user.

The system also maintains an independent certificate and private signature key for each of a user's applications, to allow it to sign application transactions on behalf of the user using only application-specific information.

To assist the system in routing product bar code (UPC) "hyperlink" activations, the system records a favorite application on behalf of the user for any number of product types.

Each application is associated with an application provider, and the system maintains an account on behalf of each application provider, to allow it to credit and debit the provider for click-through fees etc.

An application provider can be a publisher of periodical subscribed content. The system records the user's willingness to receive the subscribed publication, as well as the expected frequency of publication.

5 COMMUNICATIONS PROTOCOLS

A communications protocol defines an ordered exchange of messages between entities. In the netpage system, entities such as pens, printers and servers utilise a set of defined protocols to cooperatively handle user interaction with the netpage system.

Each protocol is illustrated by way of a sequence diagram in which the horizontal dimension is used to represent message flow and the vertical dimension is used to represent time. Each entity is represented by a rectangle containing the name of the entity and a vertical column representing the lifeline of the entity. During the time an entity exists, the lifeline is shown as a dashed line. During the time an entity is active, the lifeline is shown as a double line. Because the protocols considered here do not create or destroy entities, lifelines are generally cut short as soon as an entity ceases to participate in a protocol.

5.1 SUBSCRIPTION DELIVERY PROTOCOL

A preferred embodiment of a subscription delivery protocol is shown in Figure 40.

A large number of users may subscribe to a periodical publication. Each user's edition may be laid out differently, but many users' editions will share common content such as text objects and image objects. The subscription delivery protocol therefore delivers document structures to individual printers via pointcast, but delivers shared
5 content objects via multicast.

The application (i.e. publisher) first obtains a document ID 51 for each document from an ID server 12. It then sends each document structure, including its document ID and page descriptions, to the page server 10 responsible for the document's newly allocated ID. It includes its own application ID 64, the subscriber's alias ID 65,
10 and the relevant set of multicast channel names. It signs the message using its private signature key.

The page server uses the application ID and alias ID to obtain from the registration server the corresponding user ID 60, the user's selected printer ID 62 (which may be explicitly selected for the application, or may be the user's default printer), and
15 the application's certificate.

The application's certificate allows the page server to verify the message signature. The page server's request to the registration server fails if the application ID and alias ID don't together identify a subscription 808.

The page server then allocates document and page instance IDs and forwards
20 the page descriptions, including page IDs 50, to the printer. It includes the relevant set of multicast channel names for the printer to listen to.

It then returns the newly allocated page IDs to the application for future reference.

Once the application has distributed all of the document structures to the
25 subscribers' selected printers via the relevant page servers, it multicasts the various subsets of the shared objects on the previously selected multicast channels. Both page servers and printers monitor the appropriate multicast channels and receive their required content objects. They are then able to populate the previously pointcast document structures. This allows the page servers to add complete documents to their databases,
30 and it allows the printers to print the documents.

5.2 HYPERLINK ACTIVATION PROTOCOL

A preferred embodiment of a hyperlink activation protocol is shown in Figure 42.

When a user clicks on a netpage with a netpage pen, the pen communicates the
5 click to the nearest netpage printer 601. The click identifies the page and a location on
the page. The printer already knows the ID 61 of the pen from the pen connection
protocol.

The printer determines, via the DNS, the network address of the page server
10a handling the particular page ID 50. The address may already be in its cache if the
10 user has recently interacted with the same page. The printer then forwards the pen ID, its
own printer ID 62, the page ID and click location to the page server.

The page server loads the page description 5 identified by the page ID and
determines which input element's zone 58, if any, the click lies in. Assuming the
relevant input element is a hyperlink element 844, the page server then obtains the
15 associated application ID 64 and link ID 54, and determines, via the DNS, the network
address of the application server hosting the application 71.

The page server uses the pen ID 61 to obtain the corresponding user ID 60 from
the registration server 11, and then allocates a globally unique hyperlink request ID 52
and builds a hyperlink request 934. The hyperlink request class diagram is shown in
20 Figure 41. The hyperlink request records the IDs of the requesting user and printer, and
identifies the clicked hyperlink instance 862. The page server then sends its own server
ID 53, the hyperlink request ID, and the link ID to the application.

The application produces a response document according to application-
specific logic, and obtains a document ID 51 from an ID server 12. It then sends the
25 document to the page server 10b responsible for the document's newly allocated ID,
together with the requesting page server's ID and the hyperlink request ID.

The second page server sends the hyperlink request ID and application ID to
the first page server to obtain the corresponding user ID and printer ID 62. The first page
server rejects the request if the hyperlink request has expired or is for a different
30 application.

The second page server allocates document instance and page IDs 50, returns the newly allocated page IDs to the application, adds the complete document to its own database, and finally sends the page descriptions to the requesting printer.

The hyperlink instance may include a meaningful transaction ID 55, in which case the first page server includes the transaction ID in the message sent to the application. This allows the application to establish a transaction-specific context for the hyperlink activation.

If the hyperlink requires a user alias, i.e. its “alias required” attribute is set, then the first page server sends both the pen ID 61 and the hyperlink’s application ID 64 to the registration server 11 to obtain not just the user ID corresponding to the pen ID but also the alias ID 65 corresponding to the application ID and the user ID. It includes the alias ID in the message sent to the application, allowing the application to establish a user-specific context for the hyperlink activation.

5.3 HANDWRITING RECOGNITION PROTOCOL

When a user draws a stroke on a netpage with a netpage pen, the pen communicates the stroke to the nearest netpage printer. The stroke identifies the page and a path on the page.

The printer forwards the pen ID 61, its own printer ID 62, the page ID 50 and stroke path to the page server 10 in the usual way.

The page server loads the page description 5 identified by the page ID and determines which input element’s zone 58, if any, the stroke intersects. Assuming the relevant input element is a text field 878, the page server appends the stroke to the text field’s digital ink.

After a period of inactivity in the zone of the text field, the page server sends the pen ID and the pending strokes to the registration server 11 for interpretation. The registration server identifies the user corresponding to the pen, and uses the user’s accumulated handwriting model 822 to interpret the strokes as handwritten text. Once it has converted the strokes to text, the registration server returns the text to the requesting page server. The page server appends the text to the text value of the text field.

5.4 SIGNATURE VERIFICATION PROTOCOL

Assuming the input element whose zone the stroke intersects is a signature field 880, the page server 10 appends the stroke to the signature field's digital ink.

After a period of inactivity in the zone of the signature field, the page server
5 sends the pen ID 61 and the pending strokes to the registration server 11 for verification. It also sends the application ID 64 associated with the form of which the signature field is part, as well as the form ID 56 and the current data content of the form. The registration server identifies the user corresponding to the pen, and uses the user's dynamic signature biometric 818 to verify the strokes as the user's signature. Once it has
10 verified the signature, the registration server uses the application ID 64 and user ID 60 to identify the user's application-specific private signature key. It then uses the key to generate a digital signature of the form data, and returns the digital signature to the requesting page server. The page server assigns the digital signature to the signature field and sets the associated form's status to frozen.

15 The digital signature includes the alias ID 65 of the corresponding user. This allows a single form to capture multiple users' signatures.

5.5 FORM SUBMISSION PROTOCOL

A preferred embodiment of a form submission protocol is shown in Figure 43.

Form submission occurs via a form hyperlink activation. It thus follows the
20 protocol defined in Section 5.2, with some form-specific additions.

In the case of a form hyperlink, the hyperlink activation message sent by the page server 10 to the application 71 also contains the form ID 56 and the current data content of the form. If the form contains any signature fields, then the application verifies each one by extracting the alias ID 65 associated with the corresponding digital
25 signature and obtaining the corresponding certificate from the registration server 11.

6 NETPAGE PEN DESCRIPTION

6.1 PEN MECHANICS

Referring to Figures 8 and 9, the pen, generally designated by reference numeral 101, includes a housing 102 in the form of a plastics moulding having walls 103
30 defining an interior space 104 for mounting the pen components. The pen top 105 is in

operation rotatably mounted at one end 106 of the housing 102. A semi-transparent cover 107 is secured to the opposite end 108 of the housing 102. The cover 107 is also of moulded plastics, and is formed from semi-transparent material in order to enable the user to view the status of the LED mounted within the housing 102. The cover 107
5 includes a main part 109 which substantially surrounds the end 108 of the housing 102 and a projecting portion 110 which projects back from the main part 109 and fits within a corresponding slot 111 formed in the walls 103 of the housing 102. A radio antenna 112 is mounted behind the projecting portion 110, within the housing 102. Screw threads 113 surrounding an aperture 113A on the cover 107 are arranged to receive a metal end
10 piece 114, including corresponding screw threads 115. The metal end piece 114 is removable to enable ink cartridge replacement.

Also mounted within the cover 107 is a tri-color status LED 116 on a flex PCB 117. The antenna 112 is also mounted on the flex PCB 117. The status LED 116 is mounted at the top of the pen 101 for good all-around visibility.

15 The pen can operate both as a normal marking ink pen and as a non-marking stylus. An ink pen cartridge 118 with nib 119 and a stylus 120 with stylus nib 121 are mounted side by side within the housing 102. Either the ink cartridge nib 119 or the stylus nib 121 can be brought forward through open end 122 of the metal end piece 114, by rotation of the pen top 105. Respective slider blocks 123 and 124 are mounted to the
20 ink cartridge 118 and stylus 120, respectively. A rotatable cam barrel 125 is secured to the pen top 105 in operation and arranged to rotate therewith. The cam barrel 125 includes a cam 126 in the form of a slot within the walls 181 of the cam barrel. Cam followers 127 and 128 projecting from slider blocks 123 and 124 fit within the cam slot 126. On rotation of the cam barrel 125, the slider blocks 123 or 124 move relative to
25 each other to project either the pen nib 119 or stylus nib 121 out through the hole 122 in the metal end piece 114. The pen 101 has three states of operation. By turning the top 105 through 90° steps, the three states are:

- Stylus 120 nib 121 out;
- Ink cartridge 118 nib 119 out; and
- 30 • Neither ink cartridge 118 nib 119 out nor stylus 120 nib 121 out.

A second flex PCB 129, is mounted on an electronics chassis 130 which sits within the housing 102. The second flex PCB 129 mounts an infrared LED 131 for providing infrared radiation for projection onto the surface. An image sensor 132 is provided mounted on the second flex PCB 129 for receiving reflected radiation from the surface. The second flex PCB 129 also mounts a radio frequency chip 133, which includes an RF transmitter and RF receiver, and a controller chip 134 for controlling operation of the pen 101. An optics block 135 (formed from moulded clear plastics) sits within the cover 107 and projects an infrared beam onto the surface and receives images onto the image sensor 132. Power supply wires 136 connect the components on the second flex PCB 129 to battery contacts 137 which are mounted within the cam barrel 125. A terminal 138 connects to the battery contacts 137 and the cam barrel 125. A three volt rechargeable battery 139 sits within the cam barrel 125 in contact with the battery contacts. An induction charging coil 140 is mounted about the second flex PCB 129 to enable recharging of the battery 139 via induction. The second flex PCB 129 also mounts an infrared LED 143 and infrared photodiode 144 for detecting displacement in the cam barrel 125 when either the stylus 120 or the ink cartridge 118 is used for writing, in order to enable a determination of the force being applied to the surface by the pen nib 119 or stylus nib 121. The IR photodiode 144 detects light from the IR LED 143 via reflectors (not shown) mounted on the slider blocks 123 and 124.

Rubber grip pads 141 and 142 are provided towards the end 108 of the housing 102 to assist gripping the pen 101, and top 105 also includes a clip 142 for clipping the pen 101 to a pocket.

6.2 PEN CONTROLLER

The pen 101 is arranged to determine the position of its nib (stylus nib 121 or ink cartridge nib 119) by imaging, in the infrared spectrum, an area of the surface in the vicinity of the nib. It records the location data from the nearest location tag, and is arranged to calculate the distance of the nib 121 or 119 from the location tag utilising optics 135 and controller chip 134. The controller chip 134 calculates the orientation of the pen and the nib-to-tag distance from the perspective distortion observed on the imaged tag.

Utilising the RF chip 133 and antenna 112 the pen 101 can transmit the digital

ink data (which is encrypted for security and packaged for efficient transmission) to the computing system.

When the pen is in range of a receiver, the digital ink data is transmitted as it is formed. When the pen 101 moves out of range, digital ink data is buffered within the pen 101 (the pen 101 circuitry includes a buffer arranged to store digital ink data for approximately 12 minutes of the pen motion on the surface) and can be transmitted later.

The controller chip 134 is mounted on the second flex PCB 129 in the pen 101. Figure 10 is a block diagram illustrating in more detail the architecture of the controller chip 134. Figure 10 also shows representations of the RF chip 133, the image sensor 132, the tri-color status LED 116, the IR illumination LED 131, the IR force sensor LED 143, and the force sensor photodiode 144.

The pen controller chip 134 includes a controlling processor 145. Bus 146 enables the exchange of data between components of the controller chip 134. Flash memory 147 and a 512 KB DRAM 148 are also included. An analog-to-digital converter 149 is arranged to convert the analog signal from the force sensor photodiode 144 to a digital signal.

An image sensor interface 152 interfaces with the image sensor 132. A transceiver controller 153 and base band circuit 154 are also included to interface with the RF chip 133 which includes an RF circuit 155 and RF resonators and inductors 156 connected to the antenna 112.

The controlling processor 145 captures and decodes location data from tags from the surface via the image sensor 132, monitors the force sensor photodiode 144, controls the LEDs 116, 131 and 143, and handles short-range radio communication via the radio transceiver 153. It is a medium-performance (~40MHz) general-purpose RISC processor.

The processor 145, digital transceiver components (transceiver controller 153 and baseband circuit 154), image sensor interface 152, flash memory 147 and 512KB DRAM 148 are integrated in a single controller ASIC. Analog RF components (RF circuit 155 and RF resonators and inductors 156) are provided in the separate RF chip.

The image sensor is a 215x215 pixel CCD (such a sensor is produced by

Matsushita Electronic Corporation, and is described in a paper by Itakura, K T Nobusada, N Okusanya, R Nagayoshi, and M Ozaki, "A 1mm 50k-Pixel IT CCD Image Sensor for Miniature Camera System", IEEE Transactions on Electronic Devices, Volt 47, number 1, January 2000, which is incorporated herein by reference) with an IR filter.

5 The controller ASIC 134 enters a quiescent state after a period of inactivity when the pen 101 is not in contact with a surface. It incorporates a dedicated circuit 150 which monitors the force sensor photodiode 144 and wakes up the controller 134 via the power manager 151 on a pen-down event.

10 The radio transceiver communicates in the unlicensed 900MHz band normally used by cordless telephones, or alternatively in the unlicensed 2.4GHz industrial, scientific and medical (ISM) band, and uses frequency hopping and collision detection to provide interference-free communication.

15 In an alternative embodiment, the pen incorporates an Infrared Data Association (IrDA) interface for short-range communication with a base station or netpage printer.

 In a further embodiment, the pen 101 includes a pair of orthogonal accelerometers mounted in the normal plane of the pen 101 axis. The accelerometers 190 are shown in Figures 9 and 10 in ghost outline.

20 The provision of the accelerometers enables this embodiment of the pen 101 to sense motion without reference to surface location tags, allowing the location tags to be sampled at a lower rate. Each location tag ID can then identify an object of interest rather than a position on the surface. For example, if the object is a user interface input element (e.g. a command button), then the tag ID of each location tag within the area of the input element can directly identify the input element.

25 The acceleration measured by the accelerometers in each of the x and y directions is integrated with respect to time to produce an instantaneous velocity and position.

30 Since the starting position of the stroke is not known, only relative positions within a stroke are calculated. Although position integration accumulates errors in the sensed acceleration, accelerometers typically have high resolution, and the time duration

of a stroke, over which errors accumulate, is short.

7 NETPAGE PRINTER DESCRIPTION

7.1 PRINTER MECHANICS

The vertically-mounted netpage wallprinter 601 is shown fully assembled in Figure 11. It prints netpages on Letter/A4 sized media using duplexed 8½" Memjet™ print engines 602 and 603, as shown in Figures 12 and 12a. It uses a straight paper path with the paper 604 passing through the duplexed print engines 602 and 603 which print both sides of a sheet simultaneously, in full color and with full bleed.

An integral binding assembly 605 applies a strip of glue along one edge of each printed sheet, allowing it to adhere to the previous sheet when pressed against it. This creates a final bound document 618 which can range in thickness from one sheet to several hundred sheets.

The replaceable ink cartridge 627, shown in Figure 13 coupled with the duplexed print engines, has bladders or chambers for storing fixative, adhesive, and cyan, magenta, yellow, black and infrared inks. The cartridge also contains a micro air filter in a base molding. The micro air filter interfaces with an air pump 638 inside the printer via a hose 639. This provides filtered air to the printheads to prevent ingress of micro particles into the Memjet™ printheads 350 which might otherwise clog the printhead nozzles. By incorporating the air filter within the cartridge, the operational life of the filter is effectively linked to the life of the cartridge. The ink cartridge is a fully recyclable product with a capacity for printing and gluing 3000 pages (1500 sheets).

Referring to Figure 12, the motorized media pick-up roller assembly 626 pushes the top sheet directly from the media tray past a paper sensor on the first print engine 602 into the duplexed Memjet™ printhead assembly. The two Memjet™ print engines 602 and 603 are mounted in an opposing in-line sequential configuration along the straight paper path. The paper 604 is drawn into the first print engine 602 by integral, powered pick-up rollers 626. The position and size of the paper 604 is sensed and full bleed printing commences. Fixative is printed simultaneously to aid drying in the shortest possible time.

The paper exits the first Memjet™ print engine 602 through a set of powered

exit spike wheels (aligned along the straight paper path), which act against a rubberized roller. These spike wheels contact the 'wet' printed surface and continue to feed the sheet 604 into the second Memjet™ print engine 603.

Referring to Figures 12 and 12a, the paper 604 passes from the duplexed print engines 602 and 603 into the binder assembly 605. The printed page passes between a powered spike wheel axle 670 with a fibrous support roller and another movable axle with spike wheels and a momentary action glue wheel. The movable axle/glue assembly 673 is mounted to a metal support bracket and it is transported forward to interface with the powered axle 670 via gears by action of a camshaft. A separate motor powers this camshaft.

The glue wheel assembly 673 consists of a partially hollow axle 679 with a rotating coupling for the glue supply hose 641 from the ink cartridge 627. This axle 679 connects to a glue wheel, which absorbs adhesive by capillary action through radial holes. A molded housing 682 surrounds the glue wheel, with an opening at the front. Pivoting side moldings and sprung outer doors are attached to the metal bracket and hinge out sideways when the rest of the assembly 673 is thrust forward. This action exposes the glue wheel through the front of the molded housing 682. Tension springs close the assembly and effectively cap the glue wheel during periods of inactivity.

As the sheet 604 passes into the glue wheel assembly 673, adhesive is applied to one vertical edge on the front side (apart from the first sheet of a document) as it is transported down into the binding assembly 605.

7.2 PRINTER CONTROLLER ARCHITECTURE

The netpage printer controller consists of a controlling processor 750, a factory-installed or field-installed network interface module 625, a radio transceiver (transceiver controller 753, baseband circuit 754, RF circuit 755, and RF resonators and inductors 756), dual raster image processor (RIP) DSPs 757, duplexed print engine controllers 760a and 760b, flash memory 658, and 64MB of DRAM 657, as illustrated in Figure 14.

The controlling processor handles communication with the network 19 and with local wireless netpage pens 101, senses the help button 617, controls the user interface LEDs 613-616, and feeds and synchronizes the RIP DSPs 757 and print engine

controllers 760. It consists of a medium-performance general-purpose microprocessor. The controlling processor 750 communicates with the print engine controllers 760 via a high-speed serial bus 659.

5 The RIP DSPs rasterize and compress page descriptions to the netpage printer's compressed page format. Each print engine controller expands, dithers and prints page images to its associated Memjet™ printhead 350 in real time (i.e. at over 30 pages per minute). The duplexed print engine controllers print both sides of a sheet simultaneously.

10 The master print engine controller 760a controls the paper transport and monitors ink usage in conjunction with the master QA chip 665 and the ink cartridge QA chip 761.

The printer controller's flash memory 658 holds the software for both the processor 750 and the DSPs 757, as well as configuration data. This is copied to main memory 657 at boot time.

15 The processor 750, DSPs 757, and digital transceiver components (transceiver controller 753 and baseband circuit 754) are integrated in a single controller ASIC 656. Analog RF components (RF circuit 755 and RF resonators and inductors 756) are provided in a separate RF chip 762. The network interface module 625 is separate, since netpage printers allow the network connection to be factory-selected or field-selected. Flash memory 658 and the 2×256Mbit (64MB) DRAM 657 is also off-chip. The print
20 engine controllers 760 are provided in separate ASICs.

A variety of network interface modules 625 are provided, each providing a netpage network interface 751 and optionally a local computer or network interface 752. Netpage network Internet interfaces include POTS modems, Hybrid Fiber-Coax (HFC) cable modems, ISDN modems, DSL modems, satellite transceivers, current and next-
25 generation cellular telephone transceivers, and wireless local loop (WLL) transceivers. Local interfaces include IEEE 1284 (parallel port), 10Base-T and 100Base-T Ethernet, USB and USB 2.0, IEEE 1394 (Firewire), and various emerging home networking interfaces. If an Internet connection is available on the local network, then the local network interface can be used as the netpage network interface.

30 The radio transceiver 753 communicates in the unlicensed 900MHz band

normally used by cordless telephones, or alternatively in the unlicensed 2.4GHz industrial, scientific and medical (ISM) band, and uses frequency hopping and collision detection to provide interference-free communication.

5 The printer controller optionally incorporates an Infrared Data Association (IrDA) interface for receiving data “squirted” from devices such as netpage cameras. In an alternative embodiment, the printer uses the IrDA interface for short-range communication with suitably configured netpage pens.

7.2.1 RASTERIZATION AND PRINTING

10 Once the main processor 750 has received and verified the document’s page layouts and page objects, it runs the appropriate RIP software on the DSPs 757.

15 The DSPs 757 rasterize each page description and compress the rasterized page image. The main processor stores each compressed page image in memory. The simplest way to load-balance multiple DSPs is to let each DSP rasterize a separate page. The DSPs can always be kept busy since an arbitrary number of rasterized pages can, in general, be stored in memory. This strategy only leads to potentially poor DSP utilization when rasterizing short documents.

Watermark regions in the page description are rasterized to a contone-resolution bi-level bitmap which is losslessly compressed to negligible size and which forms part of the compressed page image.

20 The infrared (IR) layer of the printed page contains coded netpage tags at a density of about six per inch. Each tag encodes the page ID, tag ID, and control bits, and the data content of each tag is generated during rasterization and stored in the compressed page image.

25 The main processor 750 passes back-to-back page images to the duplexed print engine controllers 760. Each print engine controller 760 stores the compressed page image in its local memory, and starts the page expansion and printing pipeline. Page expansion and printing is pipelined because it is impractical to store an entire 114MB bi-level CMYK+IR page image in memory.

7.2.2 PRINT ENGINE CONTROLLER

The page expansion and printing pipeline of the print engine controller 760 consists of a high speed IEEE 1394 serial interface 659, a standard JPEG decoder 763, a standard Group 4 Fax decoder 764, a custom halftoner/compositor unit 765, a custom tag encoder 766, a line loader/formatter unit 767, and a custom interface 768 to the Memjet™ printhead 350.

The print engine controller 360 operates in a double buffered manner. While one page is loaded into DRAM 769 via the high speed serial interface 659, the previously loaded page is read from DRAM 769 and passed through the print engine controller pipeline. Once the page has finished printing, the page just loaded is printed while another page is loaded.

The first stage of the pipeline expands (at 763) the JPEG-compressed contone CMYK layer, expands (at 764) the Group 4 Fax-compressed bi-level black layer, and renders (at 766) the bi-level netpage tag layer according to the tag format defined in section 1.2, all in parallel. The second stage dithers (at 765) the contone CMYK layer and composites (at 765) the bi-level black layer over the resulting bi-level CMYK layer. The resultant bi-level CMYK+IR dot data is buffered and formatted (at 767) for printing on the Memjet™ printhead 350 via a set of line buffers. Most of these line buffers are stored in the off-chip DRAM. The final stage prints the six channels of bi-level dot data (including fixative) to the Memjet™ printhead 350 via the printhead interface 768.

When several print engine controllers 760 are used in unison, such as in a duplexed configuration, they are synchronized via a shared line sync signal 770. Only one print engine 760, selected via the external master/slave pin 771, generates the line sync signal 770 onto the shared line.

The print engine controller 760 contains a low-speed processor 772 for synchronizing the page expansion and rendering pipeline, configuring the printhead 350 via a low-speed serial bus 773, and controlling the stepper motors 675, 676.

In the 8½" versions of the netpage printer, the two print engines each prints 30 Letter pages per minute along the long dimension of the page (11"), giving a line rate of 8.8 kHz at 1600 dpi. In the 12" versions of the netpage printer, the two print engines each prints 45 Letter pages per minute along the short dimension of the page (8½"),

giving a line rate of 10.2 kHz. These line rates are well within the operating frequency of the Memjet™ printhead, which in the current design exceeds 30 kHz.

8 ELECTRONIC MAIL

Netpage electronic mail (e-mail) provides a messaging service between netpage
5 users. It also supports message exchange with Internet e-mail users, and by extension, users of other e-mail systems interconnected with the Internet, such as corporate e-mail systems.

Each netpage user has a unique id within the netpage system, and is also known
to the system by their name, which may or may not be unique. Netpage e-mail is usually
10 addressed by selecting a name from a list, for example from the global list of netpage users or from a particular user's list of contacts. The user's nickname or alias helps disambiguate similar names. A netpage user usually doesn't have to know or specify another netpage user's unique id.

When a netpage user wants to send e-mail to an Internet user, they must specify
15 an Internet e-mail address. Similarly, when an Internet user wants to send e-mail to a netpage user, they must specify a netpage Internet e-mail address. The netpage network is known by one or more domain names on the Internet. Netpage mail gateway servers exchange e-mail with mail servers on the Internet, and in particular receive Internet e-mail addressed to a netpage domain name. Each netpage user is given an e-mail alias id
20 by which they are identified within a netpage Internet domain. A user's netpage Internet address therefore takes the form <e-mail alias id>@<netpage domain name>.

E-mail is a core service of the netpage system.

8.1 USER INTERFACE DIAGRAM NOTATION

Each application user interface flow is illustrated as a collection of documents
25 linked by command arrows. A command arrow indicates that the target document is printed as a result of the user pressing the corresponding command button on the source page. Some command arrows are labelled with multiple commands separated by slashes ('/'), indicating that any one of the specified commands causes the target document to be printed. Although multiple commands may label the same command arrow, they
30 typically have different side-effects.

In application terms, it is important to distinguish between netpage documents and netpage forms. Documents contain printed information, as well as command buttons which can be pressed by the user to request further information or some other action. Forms, in addition to behaving like normal documents, also contain input fields which can be filled in by the user. They provide the system with a data input mechanism. It is also useful to distinguish between documents which contain generic information and documents which contain information specific to a particular interaction between the user and an application. Generic documents may be pre-printed publications such as magazines sold at news stands or advertising posters encountered in public places. Forms may also be pre-printed, including, for example, subscription forms encountered in pre-printed publications. They may, of course, also be generated on-the-fly by a netpage printer in response to user requests. User-specific documents and forms are normally generated on the fly by a netpage printer in response to user requests. Figure 44 shows a generic document 990, a generic form 991, a user-specific document 992, and a user-specific form 993.

Netpages which participate in a user interface flow are further described by abstract page layouts. A page layout may contain various kinds of elements, each of which has a unique style to differentiate it from the others. As shown in Figure 45, these include fixed information 994, variable information 995, input fields 996, command buttons 997, draggable commands 998, and text hyperlinks or hypertext links 999.

When a user interface flow is broken up into multiple diagrams, any document which is duplicated is shown with dashed outlines in all but the main diagram which defines it.

8.2 E-MAIL OBJECT MODEL

8.2.1 E-mail User

The e-mail object model revolves around an e-mail user 1000, as shown in the class diagram of Figure 46. An e-mail user 1000 is either a netpage user 800 or an Internet user 1002.

8.2.2 E-mail

As illustrated in the e-mail class diagram of Figure 47, the e-mail 1003 itself

consists of a number of pages 1004. Each page corresponds to a netpage. The page structure is logical because the e-mail is delivered in the same form that it is composed, and it is composed by the sender page by page.

Each page contains digital ink 873 (Figure 33), together with any number of attachments 1005. An attachment is printed at its point of insertion, and may overflow onto the following page(s).

The sender 1006 of the e-mail is an e-mail user 1000, as are any number of recipients 1007 and copy recipients (CCs) 1008. Blind copy recipients (BCCs) are not modelled here for clarity, but can obviously be trivially accommodated.

The e-mail has an explicit subject which is always converted from digital ink to text to support interoperation with e-mail systems which don't directly support digital ink, such as e-mail systems on the Internet, and to streamline the presentation of mailbox contents within the netpage system itself.

The e-mail has a high priority flag 1009 which allows both the sender and the recipients to control the timeliness of its delivery.

8.2.3 Mailbox

Incoming e-mails may be accumulated in the user's mailbox 1010, illustrated in the mailbox class diagram of Figure 48, printed on the user's default printer, incorporated into the user's daily newspaper, or any combination of these. The user can select, for example, to print high-priority e-mails immediately on receipt but to hold low-priority e-mails.

The user may create any number of named folders 1011 within the mailbox 1010, and either manually copy and move received e-mails 1003 between folders, or associate a folder with one or more e-mail contacts (including e-mail groups) to have e-mail received from those contacts automatically placed in the folder. E-mail received from contacts not associated with a folder is placed in a predefined "inbox" folder. All e-mail sent by the user is placed in a predefined "sent e-mail" folder for future reference.

Each folder has three delivery options: "print all e-mail", "print high-priority e-mail", and "delete e-mail once printed". If a print option is selected, e-mail messages with the corresponding priority are printed on the user's default printer immediately on

receipt. If the delete option is selected, e-mail messages are deleted from the e-mail folder once printed. Otherwise e-mail messages are held indefinitely in the e-mail folder, i.e. until manually deleted by the user.

8.2.4 Contact List

- 5 Each user has a list 1012 of contacts 1013. The contact list 1012, as illustrated in Figure 49, provides a more convenient basis for selecting e-mail recipients than the global list 823 of users, particularly since most user's contact lists will fit on a single double-sided printed page. The contact list also provides a basis for ignoring unsolicited e-mail. A privacy option allows a user to ignore e-mail not sent by a member of the
- 10 contact list.

A user may create any number of contact groups 1014 within the contact list, and treat a group as a single contact 1015 for the purposes of addressing outgoing e-mail and controlling the delivery of incoming e-mail.

- Groups may themselves contain groups, and both individual contacts and
- 15 groups may be members of multiple groups as well as of the top-level contact list itself.

8.2.5 Barred User List

Rather than accepting e-mail only from known contacts, a user 800 may choose to bar individual users 1016. The barred user list 1017 records individuals from which the user refuses to accept e-mail.

20 8.3 E-MAIL USER INTERFACE

8.3.1 Send E-mail

- E-mail is sent using the **outgoing e-mail** form 1020 (see Figures 52 and 53). The e-mail form is always printed with the sender's name already specified at 1021, since the sender's identity is known from the pen used to request the e-mail form. If the e-mail
- 25 form is requested by pressing a user-specific <e-mail> button on some page, then the e-mail form is printed with the recipient's name 1007 already specified. On the other hand, if the e-mail form is requested from the help page, then the recipient is unknown and is left blank on the form. The user must specify at least one recipient before the e-mail can be sent.

The user can also pre-address an e-mail form by pressing the <e-mail to contacts> button on the help page. This elicits an **add recipients** form (Figure 54), which lists the user's contacts 1013. Each contact has a <To> and a <CC> checkbox 1022, 1023 as well as an <e-mail> button 1024. The e-mail button elicits an e-mail form addressed to that user. The <e-mail selected> button 1025 at the bottom of the page elicits an e-mail addressed to all the users whose <To> or <CC> checkboxes have been checked.

The e-mail form initially consists of a double-sided page. The front (Figure 52) contains fields 1026, 1027 for the names of recipients and copy recipients, for the subject 1028, and for the body of the e-mail 1029. The back (Figure 53) contains a field 1030 for continuing the body of the e-mail. Any recipient names (or addresses) written by hand are converted from digital ink to text for lookup purposes. The subject is also converted, for presentation purposes, as discussed earlier. The body is retained as digital ink, to allow handwritten text and diagrams etc. to be delivered in a uniform and expressive manner.

The <add page> button 1031 at the bottom of every page of the e-mail form adds another double-sided page to the e-mail form. Only the additional page is printed, not the entire form, but the additional page is logically linked to the original e-mail. The <discard page> button 1032 at the bottom of every page discards the corresponding page from the e-mail (but not both sides of the double-sided page). The entire e-mail is reprinted with the discarded page removed and subsequent pages, if any, moved to close the gap. A blank page is added to make the page count even, if necessary.

Each printed e-mail form corresponds to a separate e-mail instance, the uniqueness of which is indicated by the sender's name, date and time printed at the top of every page. Once an e-mail has been sent, it can't be sent again. A copy, however, can be easily made, edited, and sent. The standard <print> button on every page of the e-mail form prints another copy of the e-mail form, corresponding to a new e-mail instance. Both the original and the copy can be edited further and sent independently.

Text in the <recipients>, <copy recipients> and <subject> fields can be struck out with the pen to remove recipients, subject text, etc. The <print> button produces a copy of the e-mail form with the struck-out text removed.

The <attach> button 1033 at the bottom of every page attaches the current selection at the current end of the e-mail body. The entire e-mail is reprinted with the attachment included.

Additional pages are automatically added to the e-mail to accommodate the
5 attachment. The attachment can consist of anything which can be selected on any netpage.

The <add recipients> button 1034 adjacent to the <recipients> and <copy recipients> fields 1026, 1027 at the top of the first page of the e-mail form elicits an **add recipients** form 1036 (Figure 62), with the <subject> field 1028 reflecting the subject of
10 the e-mail form. The <e-mail> and <e-mail selected> buttons 1024, 1025 on the add recipients form elicits a copy of the e-mail form with the additional recipients and copy recipients added.

The <send> button 1035 at the bottom of every page sends the entire e-mail. If the name of any recipient is unknown to the system, then the e-mail form is reprinted
15 with the offending name printed in red, together with an error message indicating the problem.

If the name of any recipient is ambiguous, then a list of matching users is printed, each with a checkbox allowing it to be selected. The <e-mail> button at the bottom of the form reprints the e-mail form with the recipient names suitably updated.

20 The overall e-mail user interface flow is illustrated in Figure 50. The e-mail recipient exception user interface flow is illustrated in Figure 51.

8.3.2 Receive E-mail

E-mail is received in the form of an **incoming e-mail** document 1040 (Figures 55 and 56), which has the same page structure and content as the corresponding outgoing
25 e-mail form.

The <reply> button 1041 at the bottom of every page of the e-mail document produces an outgoing e-mail form (Figures 52 and 53) addressed to the sender of the incoming e-mail, and with the subject reflecting the subject of the incoming e-mail, but with "In reply to:" added as a prefix.

30 The <reply to all> button 1042 produces an outgoing e-mail form addressed to

the sender of the incoming e-mail, as well as to all of its recipients and copy recipients.

The <forward> button 1043 produces an outgoing e-mail form with no recipient, and with the subject reflecting the subject of the incoming e-mail, but with "Forwarded:" added as a prefix. The body of the incoming e-mail is also copied to the
5 body of the outgoing e-mail.

The <forward to contacts> button 1044 creates, but doesn't print, an outgoing e-mail in the same way as the <forward> button, and then implicitly invokes the <add recipients> command on it. This elicits an add recipients form in the usual way (Figure 54), with the <subject> field reflecting the subject of the forwarded e-mail.

10 The <add to contacts> button 1045 adds the sender to the recipient's list of contacts and produces an **edit contacts** form reflecting the updated contact list. Contact list editing is described in more detail in Section 8.3.3

The <bar> button 1046 adds the sender to the recipient's list of barred users and produces an **edit barred users** form reflecting the updated barred user list.

15 8.3.3 Edit Contact List

The contact list is edited using the **edit contacts** form 1050 (Figure 58). Because the structure of an individual contact group is the same as the structure of the top-level contact list, the same form is used to edit a contact group. The form is obtained by pressing the <edit contact list> button on the help page. It is also printed whenever a
20 contact is added to the contact list, for example when the <add to contacts> button 1045 is pressed on an incoming e-mail 1040 to add the sender to the contact list.

Each entry 1051 on the contact list form shows the name on the contact 1052, and the current e-mail folder 1053 in which e-mail from the contact is placed. Each entry has a checkbox 1054 which allows the contact to be selected, an <info> button 1055
25 which elicits a page of information about the user (Figure 60), and a <set e-mail folder> button 1056 which allows the e-mail folder associated with the contact to be changed via the **set e-mail folder** form.

The <delete selected> button 1057 at the bottom of the form deletes the selected contacts from the contact list (or contact group). The form is reprinted with the
30 deleted contacts removed.

The <copy to group> and <move to group> buttons 1058, 1059 at the bottom of the form allows the selected contacts to be copied and moved to a particular group via the **copy contacts** form 1060.

The contact list editing user interface flow is illustrated in Figure 57.

- 5 The copy (move) contacts form lists all of the groups in the user's contact list, each with a <copy to> (<move to>) button which copies (moves) the selected contacts to the specified group. When a <copy to> (<move to>) button is pressed, an edit contacts form is printed which shows the updated membership of the destination group.

- 10 The copy (move) contacts form 1060 provides a <new group name> field with an associated <copy to new> (<move to new>) button. This allows a new group to be simultaneously created and selected as the destination for the copy or move.

- 15 The set e-mail folder form 1070 lists all of the folders in the user's mailbox, each with a <set> button which sets the folder as the contact's e-mail folder. When the <set> button is pressed, the edit contacts form is re-printed to reflect the new folder associated with the contact.

The set e-mail folder form 1070 provides a <new e-mail folder name> field with an associated <set new> button. This allows a new folder to be simultaneously created and selected as the contact's e-mail folder. The new folder has an associated set of checkboxes which allow the folder's e-mail delivery options to be specified.

20 8.3.4 **Global User Directory**

The global user directory 823 (Figure 21), since it is large, is navigated via a standard netpage directory index. It is obtained by pressing the <global user directory> button on the help page 46.

- 25 The **global user directory** page 1130 contains an alphabetical list, by family name, of users in the name range covered by the page. Each entry has three associated buttons. The <info> button produces a **user information** page 1140 (Figure 60), the <e-mail> button generates an outgoing e-mail form 1020 (Figures 52 and 53) addressed to the corresponding user, and the <add to contacts> button adds the user to the user's contact list and prints the updated contact list 1050 (Figure 58).

- 30 The global user directory page 1130 also contains the standard netpage

directory index navigation buttons.

The global user directory user interface flow is illustrated in Figure 59. The index user interface flow and associated page layouts are as described previously.

5 The user information page 1140 (Figure 60) contains the user's contact details as provided during user registration, subject to the user's privacy preferences. It also contains <e-mail> and <add to contacts> buttons 1141, 1142 which work in the usual way.

10 The <Internet e-mail address> field 1143 is only included if the user information page is printed via the contact list for an Internet contact (as opposed to a netpage contact).

8.3.5 Business Card

15 A netpage business card 1150 (Figure 62) serves a dual purpose. While it conveys the user's contact details 1151 in the usual way, it also acts as an e-mail authorization token. When the recipient of the card presses the <add to contacts> button 1152 on the card, the owner of the card is added to the recipient's contact list in the usual way, but the recipient is also added to the owner's contact list, authorizing the recipient to send e-mail to the card owner, should the card owner only accept e-mail from known contacts. The token only allows the recipient to be added to the owner's contact list once.

20 The card contains an <e-mail> button 1153 which generates an outgoing e-mail form addressed to the card owner in the usual way. It also contains an <info> button 1154 which elicits a user information page 1140 (Figure 60) containing full details of the card owner.

The business card user interface flow is illustrated in Figure 61.

25 Since normal netpage printers don't support business card paper stock, netpage business cards are provided by a service bureau on request. The **business card request** form 1160 (Figure 65) allows the user to specify which contact details 1161 to include on the business card, an optional background texture 1162, and the number of cards required 1163. The form also includes an checkbox 1164 which allows the user to specify whether the card should act as an e-mail authorization token. Once the request is
30 submitted, the cards are automatically printed by the bureau, delivered by mail to the

user's address, and the small cost charged to the user's netpage account.

The business card request user interface flow is illustrated in Figure 64.

When a business card is printed after the e-mail authorization token checkbox has been checked by the user on the request form, then the card 1150 (Figure 62) is printed with an <add to contacts> button 1152, and an e-mail authorization token record 1155 is created, linked to the requesting user's (i.e. card owner's) record 800, as illustrated in the class diagram in Figure 63. Each card's token is given a unique token ID 1156, and the token ID is set as the hyperlink transaction ID 55 (Figure 29) of the <add to contacts> button on the business card. When a token is "redeemed" by the user to whom the card owner has given the business card, by that user pressing the <add to contacts> button on the card, the system records in the token the fact that the token has been redeemed, preventing it from being redeemed again. The token also has an expiry date, after which it cannot be redeemed. The e-mail system checks the token's redemption status and expiry date before adding the card recipient to the card owner's contact list. The token ID 1156 uniquely identifies a corresponding netpage user record 800, used to update the card recipient's and card owner's contact lists.

The hyperlink transaction IDs associated with the <e-mail> button 1153 and <info> button 1154 on the card are simply set to the card owner's user ID 60 (Figure 21), allowing the e-mail system to identify the target of the hyperlinks.

20 8.3.6 Add Internet Contact

An Internet e-mail user can be added to a user's contact list using the **Internet contact registration** form. Since an Internet user is not otherwise known to the netpage system, the form allows full name details to be specified, in addition to the Internet user's e-mail address.

25 CONCLUSION

The present invention has been described with reference to a preferred embodiment and number of specific alternative embodiments. However, it will be appreciated by those skilled in the relevant fields that a number of other embodiments, differing from those specifically described, will also fall within the spirit and scope of the present invention. Accordingly, it will be understood that the invention is not

Variable	1990		1995		2000		2005		2010		2015		2020		2025		2030		2035		2040		2045		2050									
	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD								
Age	45.2	12.5	48.1	13.2	51.3	14.1	54.7	15.0	58.2	16.1	61.8	17.2	65.5	18.3	69.3	19.4	73.2	20.5	77.1	21.6	81.0	22.7	84.9	23.8	88.8	24.9	92.7	26.0	96.6	27.1	100.5	28.2		
Gender	Male	52.3	Male	51.8	Male	51.3	Male	50.8	Male	50.3	Male	49.8	Male	49.3	Male	48.8	Male	48.3	Male	47.8	Male	47.3	Male	46.8	Male	46.3	Male	45.8	Male	45.3	Male	44.8		
Education	High	65.4	High	64.9	High	64.4	High	63.9	High	63.4	High	62.9	High	62.4	High	61.9	High	61.4	High	60.9	High	60.4	High	59.9	High	59.4	High	58.9	High	58.4	High	57.9	High	57.4
Income	High	78.5	High	77.9	High	77.3	High	76.7	High	76.1	High	75.5	High	74.9	High	74.3	High	73.7	High	73.1	High	72.5	High	71.9	High	71.3	High	70.7	High	70.1	High	69.5	High	68.9
Health	Good	82.1	Good	81.6	Good	81.1	Good	80.6	Good	80.1	Good	79.6	Good	79.1	Good	78.6	Good	78.1	Good	77.6	Good	77.1	Good	76.6	Good	76.1	Good	75.6	Good	75.1	Good	74.6	Good	74.1
Activity	High	75.2	High	74.7	High	74.2	High	73.7	High	73.2	High	72.7	High	72.2	High	71.7	High	71.2	High	70.7	High	70.2	High	69.7	High	69.2	High	68.7	High	68.2	High	67.7	High	67.2
Stress	High	68.3	High	67.8	High	67.3	High	66.8	High	66.3	High	65.8	High	65.3	High	64.8	High	64.3	High	63.8	High	63.3	High	62.8	High	62.3	High	61.8	High	61.3	High	60.8	High	60.3
Quality	High	85.4	High	84.9	High	84.4	High	83.9	High	83.4	High	82.9	High	82.4	High	81.9	High	81.4	High	80.9	High	80.4	High	79.9	High	79.4	High	78.9	High	78.4	High	77.9	High	77.4
Life	High	92.5	High	92.0	High	91.5	High	91.0	High	90.5	High	90.0	High	89.5	High	89.0	High	88.5	High	88.0	High	87.5	High	87.0	High	86.5	High	86.0	High	85.5	High	85.0	High	84.5

CLAIMS

1. A method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including
5 coded data indicative of the identity of the business card and of at least one reference point of the business card, the method including the steps of

receiving, in a computer system, indicating data from a sensing device regarding the identity of the business card and a position of the sensing device relative to the business card, the sensing device, when placed in an operative position relative to the
10 business card, sensing the indicating data using at least some of the coded data;

identifying, in the computer system and from the indicating data a request to authorise the transmission of electronic mail from the first to the second user; and

recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

15

2. The method of claim 1 in which said request to authorise the transmission of electronic mail from the first to the second user is associated with at least one zone of the business card and in which the method includes identifying, in the computer system and from the zone relative to which the sensing device is located, said request.

20

3. The method of claim 2 which includes

receiving, in the computer system, data regarding movement of the sensing device relative to the business card, the sensing device sensing its movement relative to the business card using at least some of the coded data; and

- 25 identifying, in the computer system and from said movement being at least partially within said at least one zone, the request to authorise the transmission of electronic mail from the first to the second user.

4. A method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the method including the steps of

5 receiving, in a computer system, data from a sensing device operated by the first user regarding the request and regarding movement of the sensing device relative to the business card, the sensing device, when moved relative to the business card, sensing the data regarding the request and generating the data regarding its own movement relative to the business card using at least some of the coded data;

10 interpreting in the computer system, said movement of the sensing device as designating the request; and

 recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

15 5. A method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the method including the steps of

 receiving, in a computer system, from a sensing device operated by the first
20 user, indicating data regarding the request, the sensing device, when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data;

 interpreting in the computer system, the indicating data as designating the request; and

25 recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

6. A method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including

coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the method including the steps of

receiving, in a computer system, data from a sensing device regarding the identity of the first user and regarding the request, the sensing device containing data
5 regarding the identity of the first user and sensing the data regarding the request using at least some of the coded data;

interpreting, in the computer system from the data regarding the identity of the first user and the data regarding the request, the request to authorise the transmission of electronic mail from the first user to the second user; and

10 recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

7. The method of claim 6 which includes receiving, in the computer system, data from the sensing device regarding movement of the sensing device relative to the business
15 card, the sensing device generating data regarding its own movement relative to the business card.

8. The method of any one of claims 1, 4, 5 or 6 wherein the recording of said authority is effected by recording the identity of the first user in a list of authorised users.

20

9. The method of claim 8 wherein any electronic mail sent to the second user is rejected unless the sender of the electronic mail is recorded in the list of authorised users.

10. The method of any one of claims 1, 4, 5 or 6 wherein the request to authorise the
25 transmission of electronic mail from the first user to the second user contained on the second user's business card becomes disabled after a pre-determined period of time.

11. The method of any one of claims 1, 4, 5 or 6 wherein the request to authorise the

transmission of electronic mail from the first user to the second user becomes disabled after a pre-determined number of uses.

12. The method of claim 11 wherein the pre-determined number of uses is one.

5

13. The method of any one of claims 1, 4, 5 or 6 which includes printing the business card on demand.

10 14. The method of claim 13 which includes printing the business card on a surface of a surface-defining means and, at the same time that the business card is printed, printing the coded data on the surface.

15. The method of any one of claims 1, 4, 5 or 6 in which the coded data is substantially invisible to the unaided human eye.

15

16. The method of claim 1 or 6 which includes retaining a retrievable record of each business card generated, the business card being retrievable using its identity as contained in its coded data.

20 17. The method of claim 1 or 4 in which the sensing device contains an identification means which imparts a unique identity to the sensing device and identifies it as belonging to a particular first user and in which the method includes monitoring, in the computer system, said identity.

25 18. A system for enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of the identity of the business card and of at least one reference point of the business card, the system including

a computer system for receiving indicating data from a sensing device for identifying a request to authorise the transmission of electronic mail from the first user to the second user, the indicating data being indicative of the identity of the business card and a position of the sensing device relative to the business card, the sensing device,
5 when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data, the computer system being configured to record, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

10 19. The system of claim 18 in which said request to authorise the transmission of electronic mail from the first user to the second user is associated with at least one zone of the business card.

20. The system of claim 18 which includes the sensing device, the sensing device
15 sensing its movement relative to the business card using at least some of the coded data.

21. A system for enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from
20 the first user to the second user, the system including

a computer system for receiving data from a sensing device operated by the first user, the data from the sensing device regarding the request and regarding movement of the sensing device relative to the business card, the sensing device when moved relative to the business card generating the data regarding its own movement relative to the
25 business card, the sensing device also sensing the data regarding the request using at least some of the coded data, the computer system being configured to interpret said movement as designating the request, and being configured to record, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

30 22. A system for enabling a first user to obtain, using a business card of a second user,

authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from the first user to the second user, the system including

5 a computer system for receiving indicating data from a sensing device operated by the first user, the indicating data regarding the request, the sensing device when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data, the computer system being configured to interpret the indicating data as designating the request, and being configured to record, in the computer system, an authority allowing the first user to transmit electronic mail to the
10 second user.

23. A system for enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of a request to authorise the transmission of electronic mail from
15 the first user to the second user, the system including

a computer system for receiving data from a sensing device regarding the identity of the first user and regarding the request, the sensing device containing the data regarding the identity of the first user and sensing the data regarding the request using at least some of the coded data, the computer system being configured to record, in the
20 computer system, an authority allowing the first user to transmit electronic mail to the second user.

24. The system of claim 23 which includes the sensing device, the sensing device sensing its movement relative to the business card.
25

25. The system of any one of claims 18, 21, 22 or 23 wherein the recording of said authority is effected by recording the identity of the first user in a list of authorised users.

26. The system of claim 25 wherein any electronic mail sent to the second user is

rejected unless the sender of the electronic mail is recorded in the list of authorised users.

27. The system of any one of claims 18, 21, 22 or 23 wherein the computer system disables the request to authorise the transmission of electronic mail from the first user to
5 the second user after a pre-determined period of time.

28. The system of any one of claims 18, 21, 22 or 23 wherein the computer system disables the request to authorise the transmission of electronic mail from the first user to the second user after a pre-determined number of uses.

10

29. The method of claim 28 wherein the pre-determined number of uses is one.

30. The system of any one of claims 18, 21, 22 or 23 in which the sensing device includes a marking nib.

15

31. The system of any one of claims 18, 21 or 22 in which the sensing device contains an identification means which imparts a unique identity to the sensing device and identifies it as belonging to a particular first user.

20 32. The system of any one of claims 18, 21, 22 or 23 in which the business card is printed on a surface of a surface-defining means and in which the system includes a printer for printing the business card on demand.

33. The system of claim 32 in which the printer prints the coded data at the same time as
25 printing the business card on the surface-defining means.

34. The system of any one of claims 18, 21, 22 or 23 in which the coded data is substantially invisible to the unaided human eye.

ABSTRACT

The present invention provides a method of enabling a first user to obtain, using a business card of a second user, authority to transmit electronic mail to the second user, the business card including coded data indicative of the identity of the business card and of at least one reference point of the business card, the method including the steps of: receiving, in a computer system, indicating data from a sensing device regarding the identity of the business card and a position of the sensing device relative to the business card, the sensing device, when placed in an operative position relative to the business card, sensing the indicating data using at least some of the coded data; identifying, in the computer system and from the indicating data a request to authorise the transmission of electronic mail from the first to the second user; and recording, in the computer system, an authority allowing the first user to transmit electronic mail to the second user.

(Figure 62)

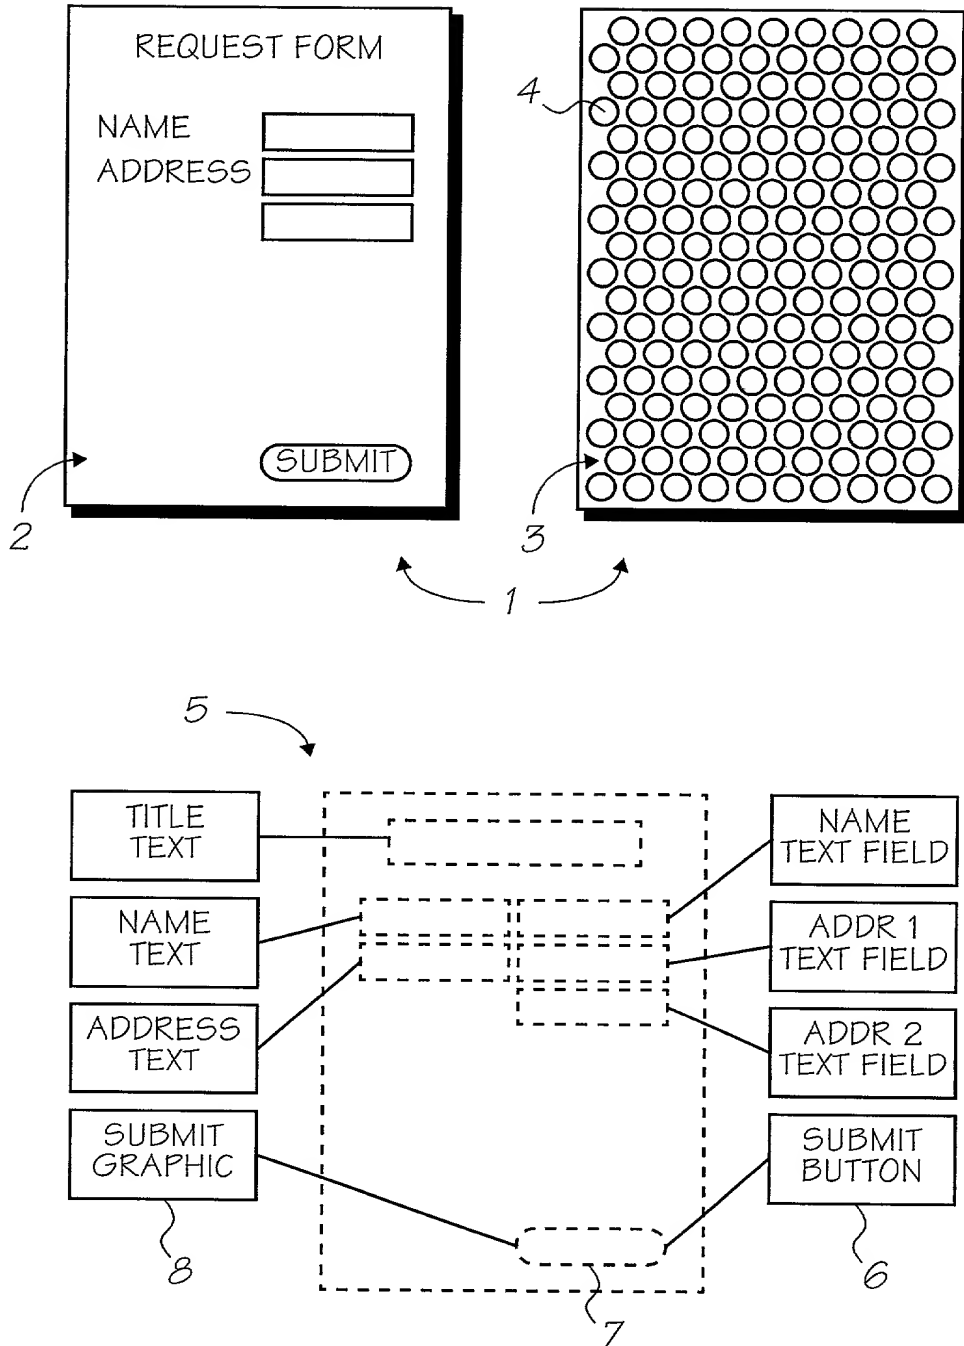


FIG. 1

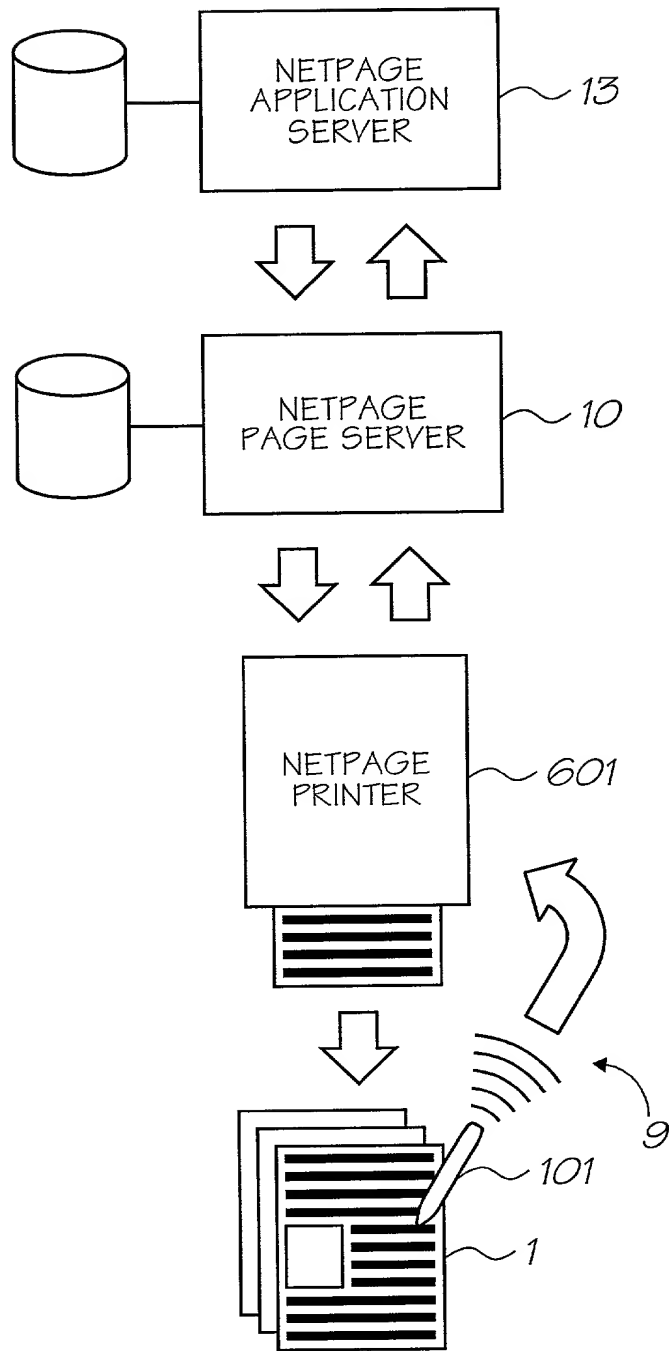


FIG. 2

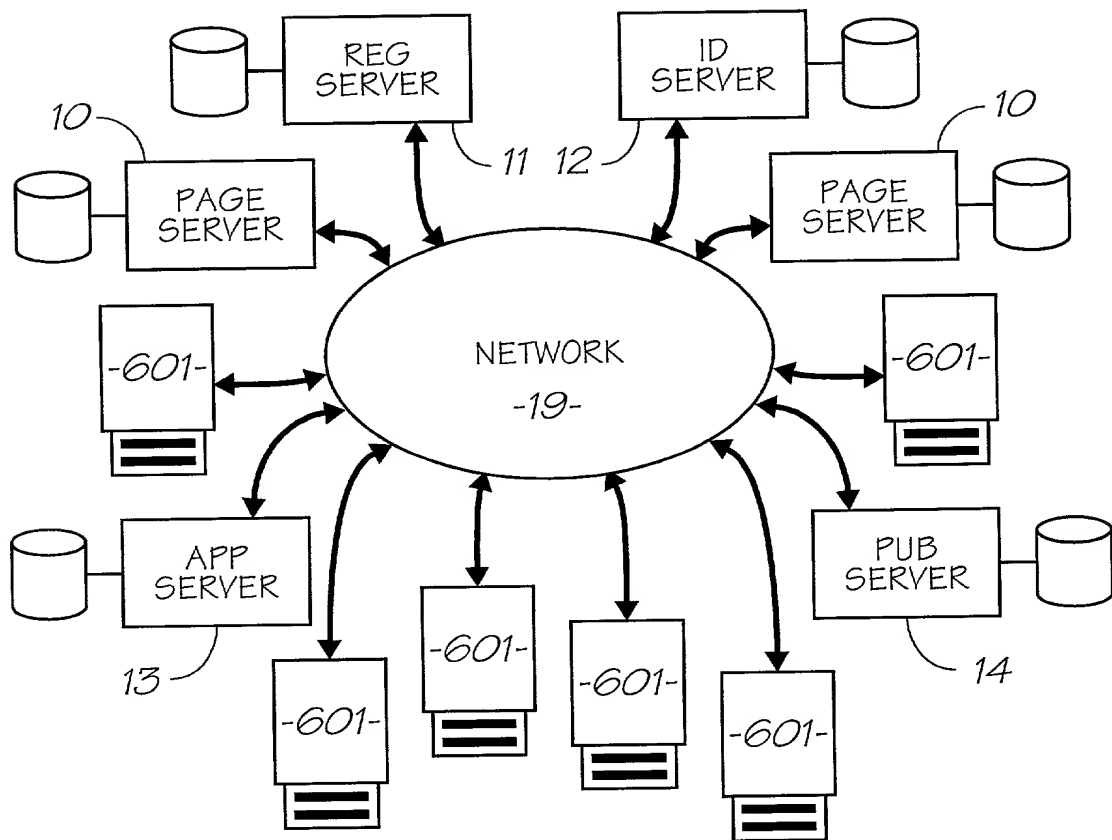


FIG. 3

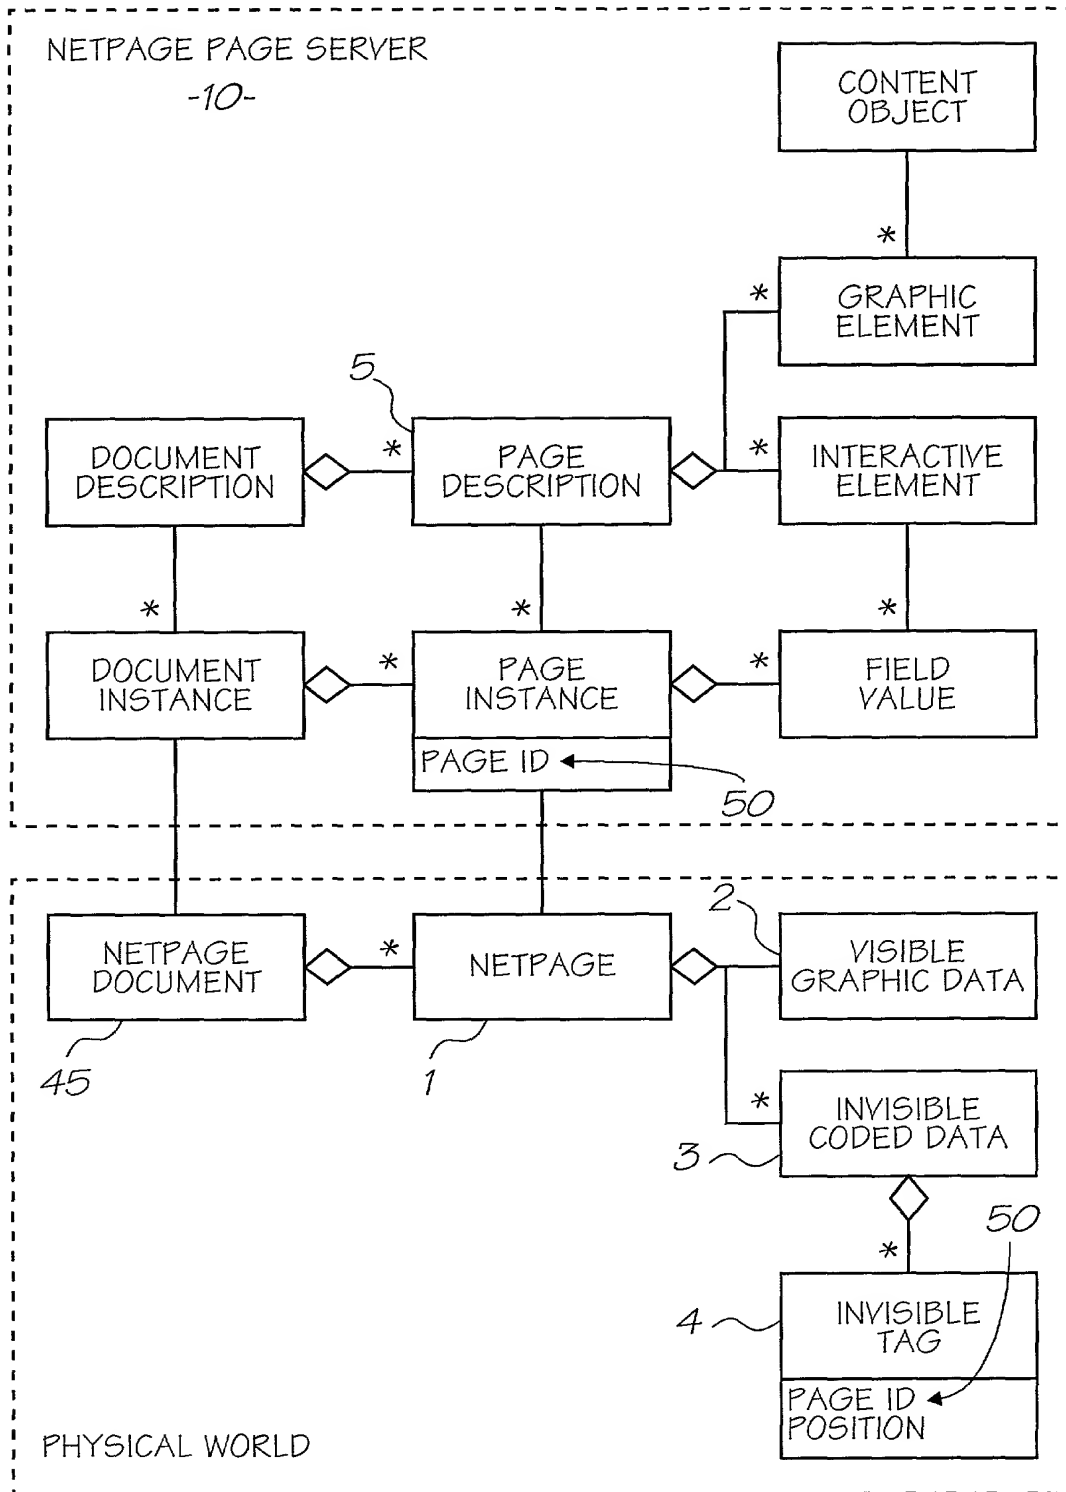


FIG. 4

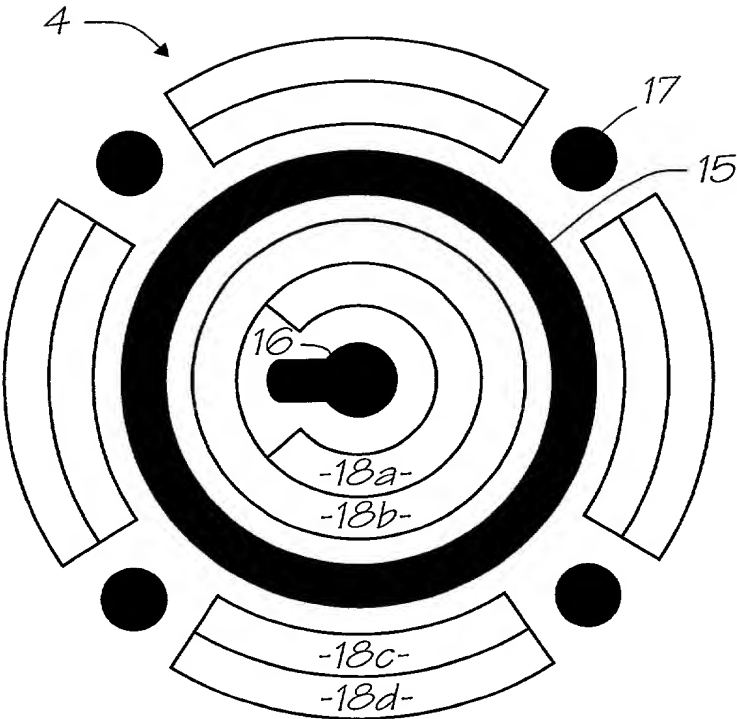


FIG. 5a

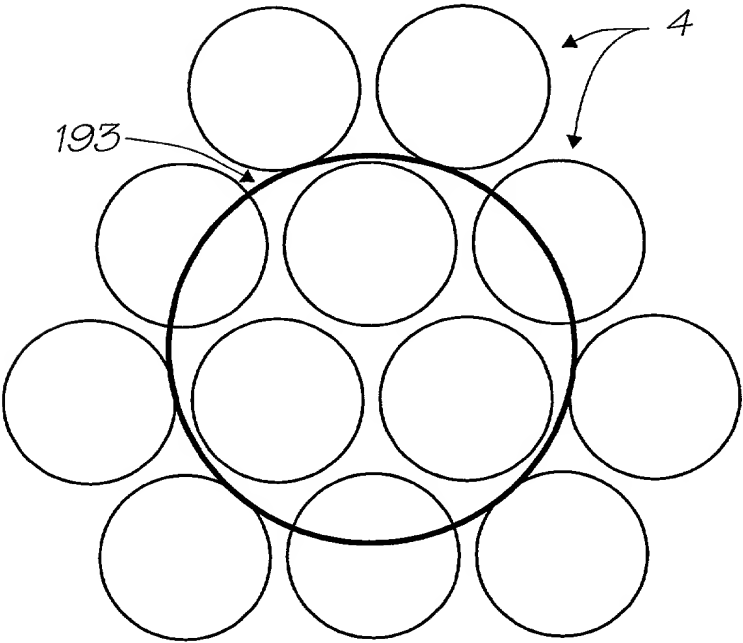


FIG. 5b

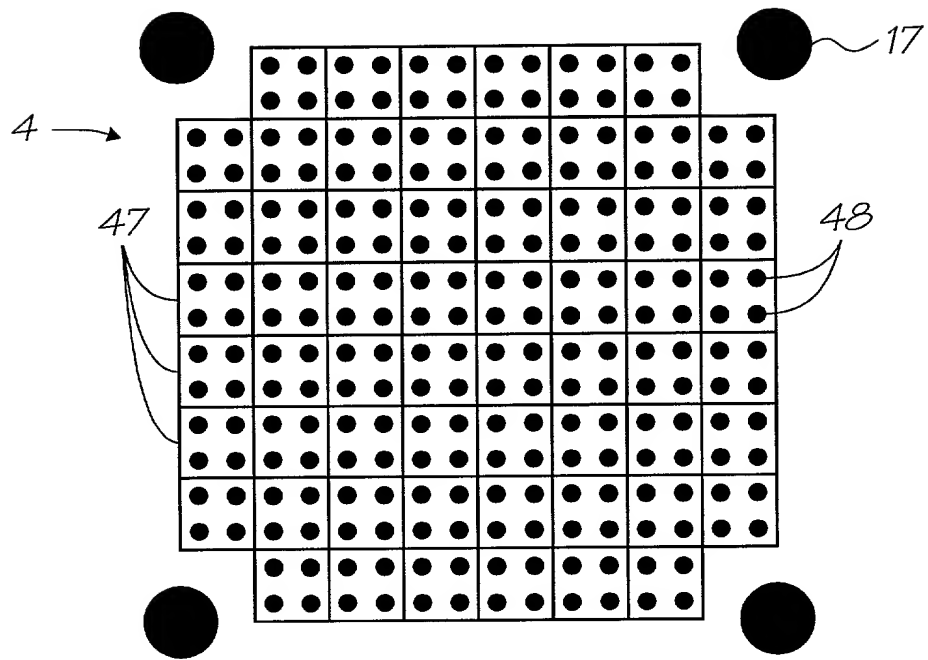


FIG. 6a

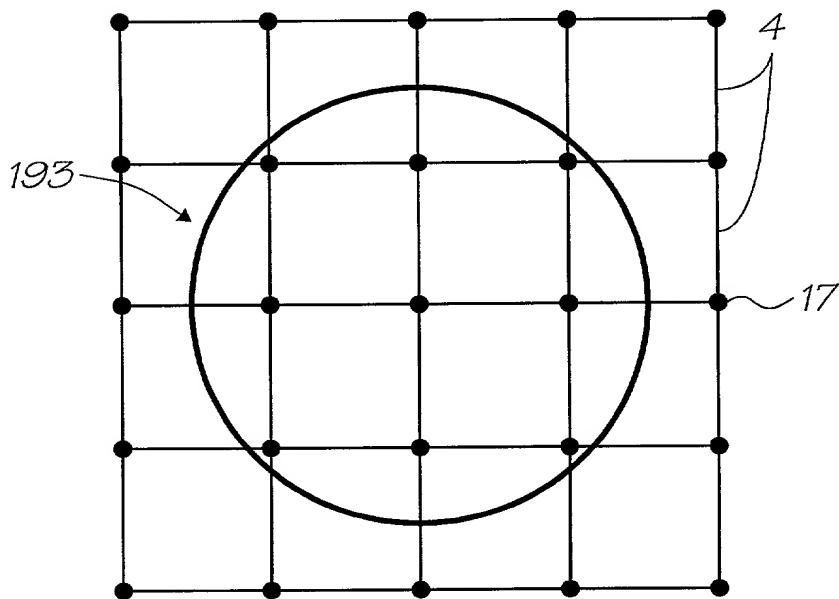


FIG. 6b

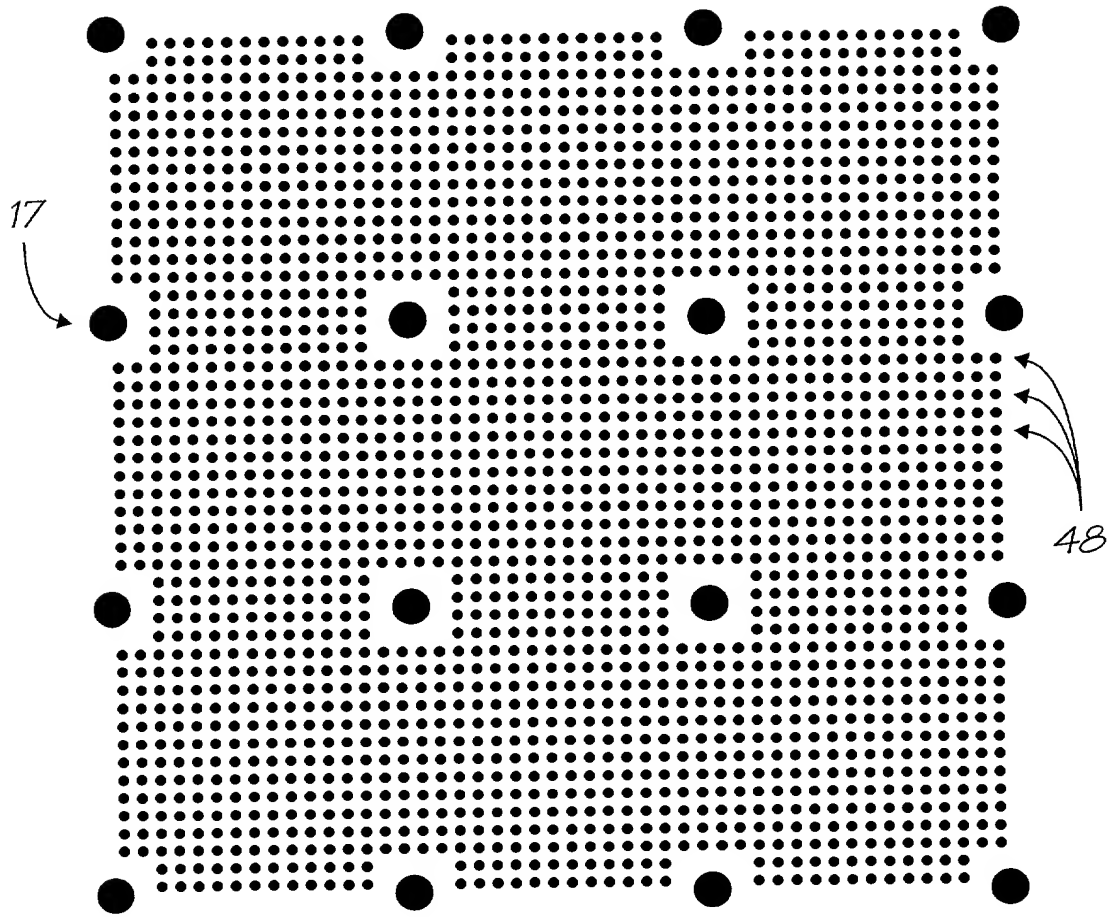


FIG. 6c

47

	1A	4G	1B	4F	1C	4D	
3O	2L	N2	2H	W2	2D	2E	2A
4C	1D	4F	1E	4J	1F	N4	1G
3K	2M	2J	2I	3I	2E	H2	2B
4B	1H	4E	1I	4J	1J	M4	1K
3G	2N	3F	2J	3E	2F	3D	2C
4A	1L	4D	1M	4H	1N	4I	1O
	2O	3C	2K	3B	2G	3A	

FIG. 6d

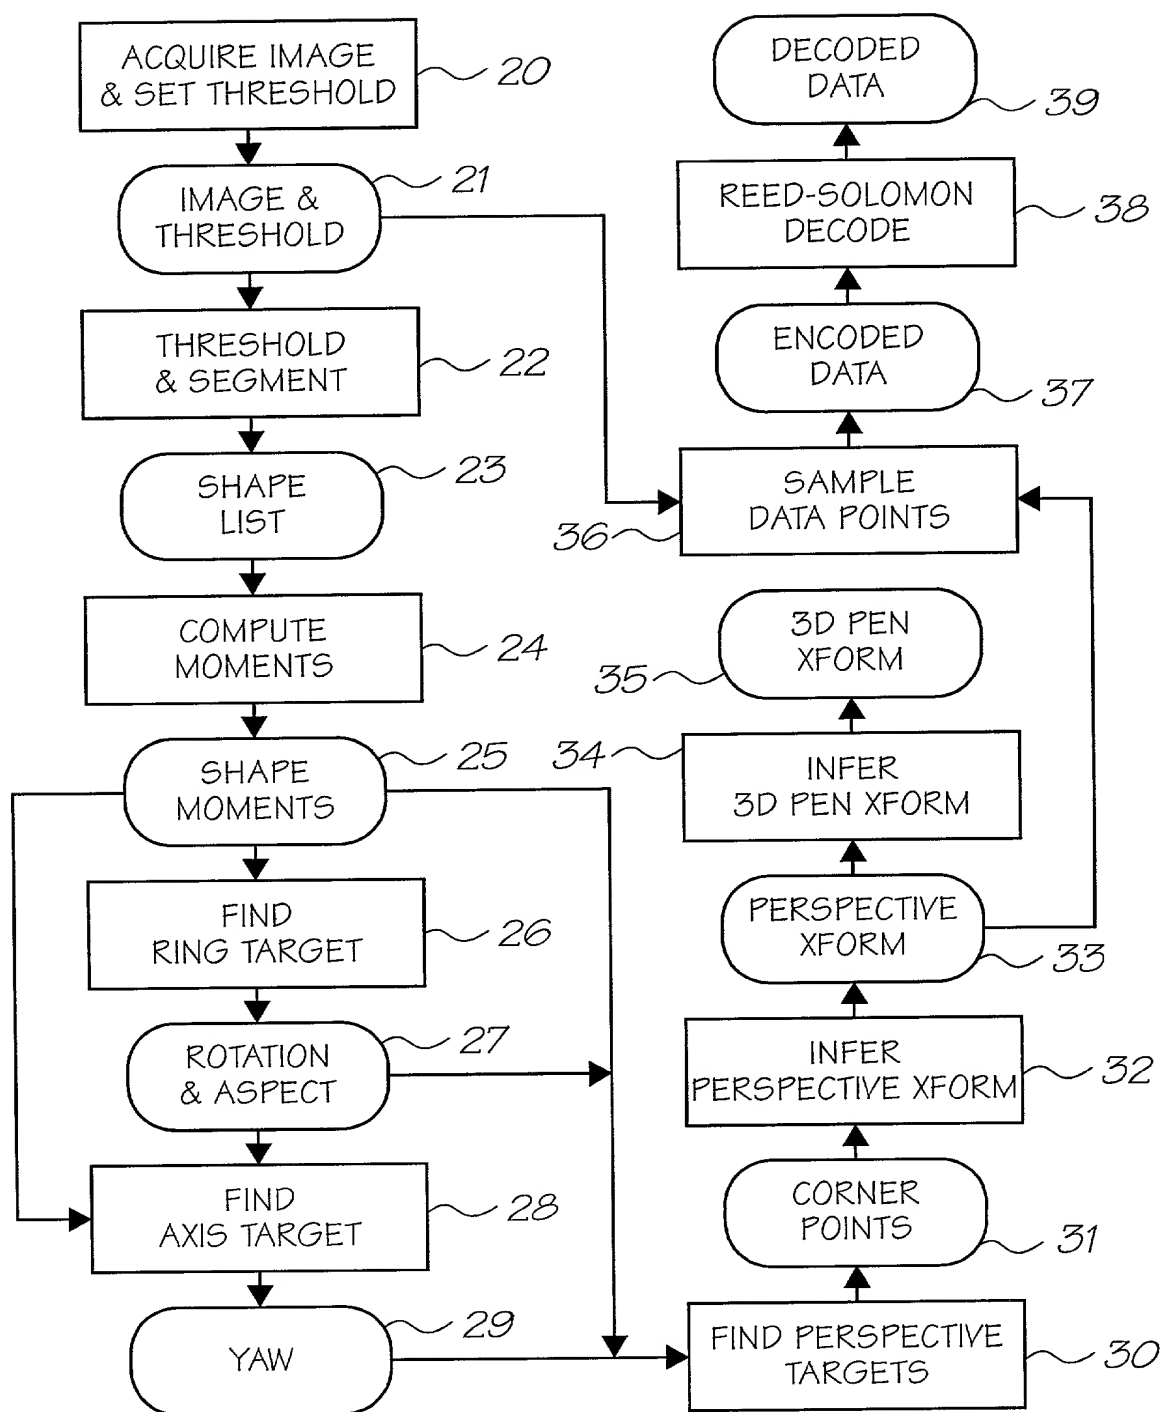


FIG. 7

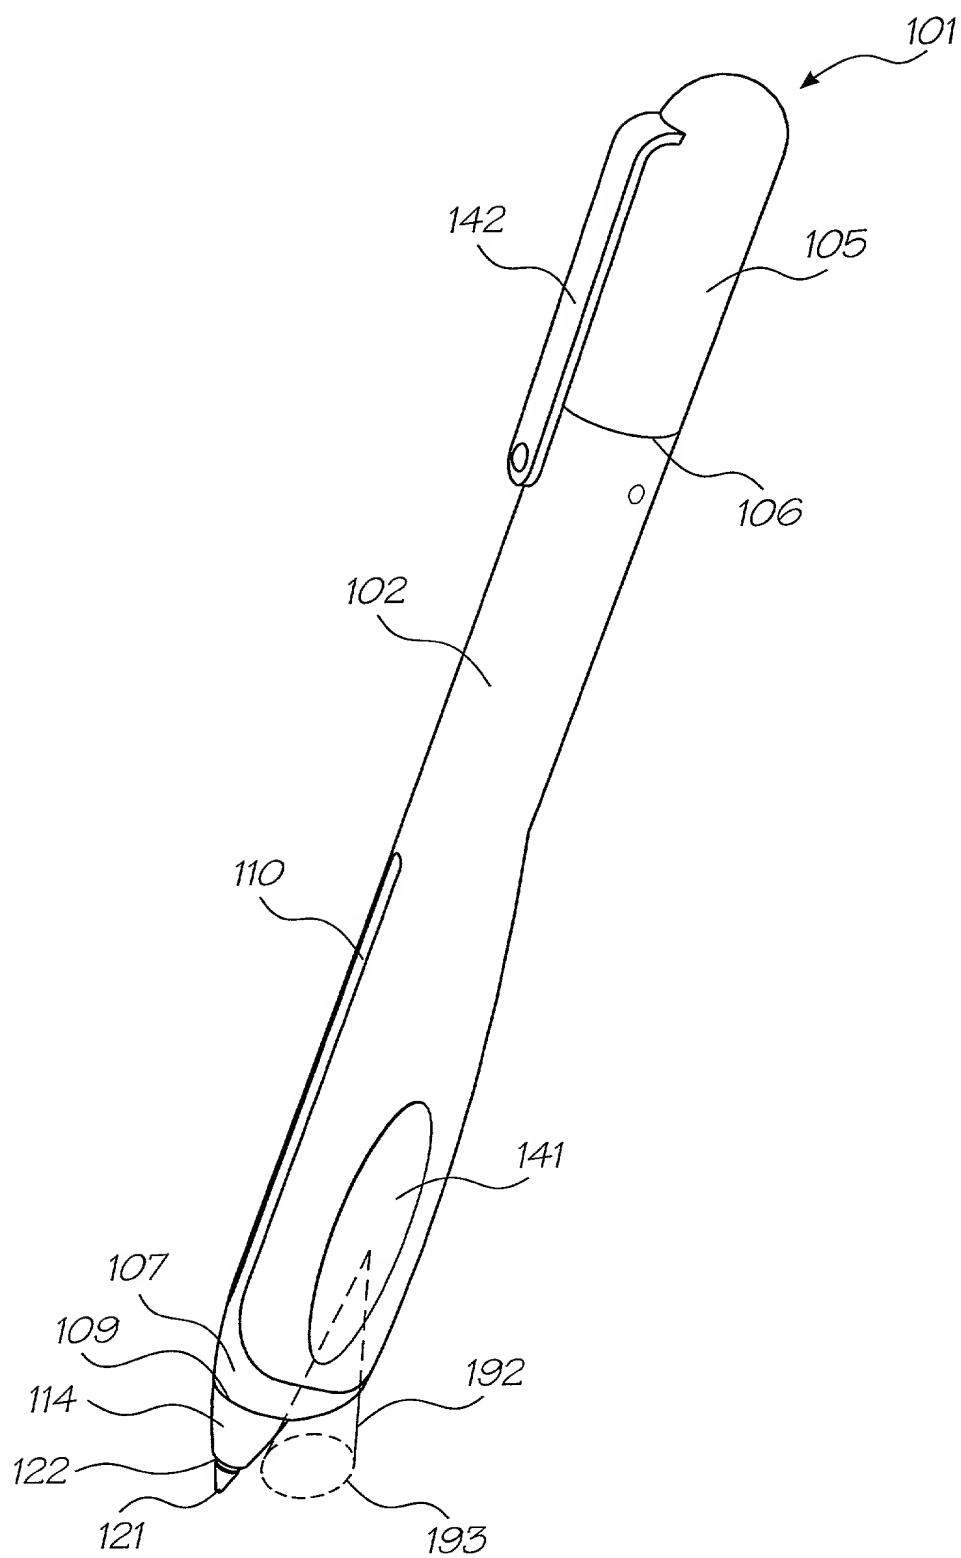


FIG. 8

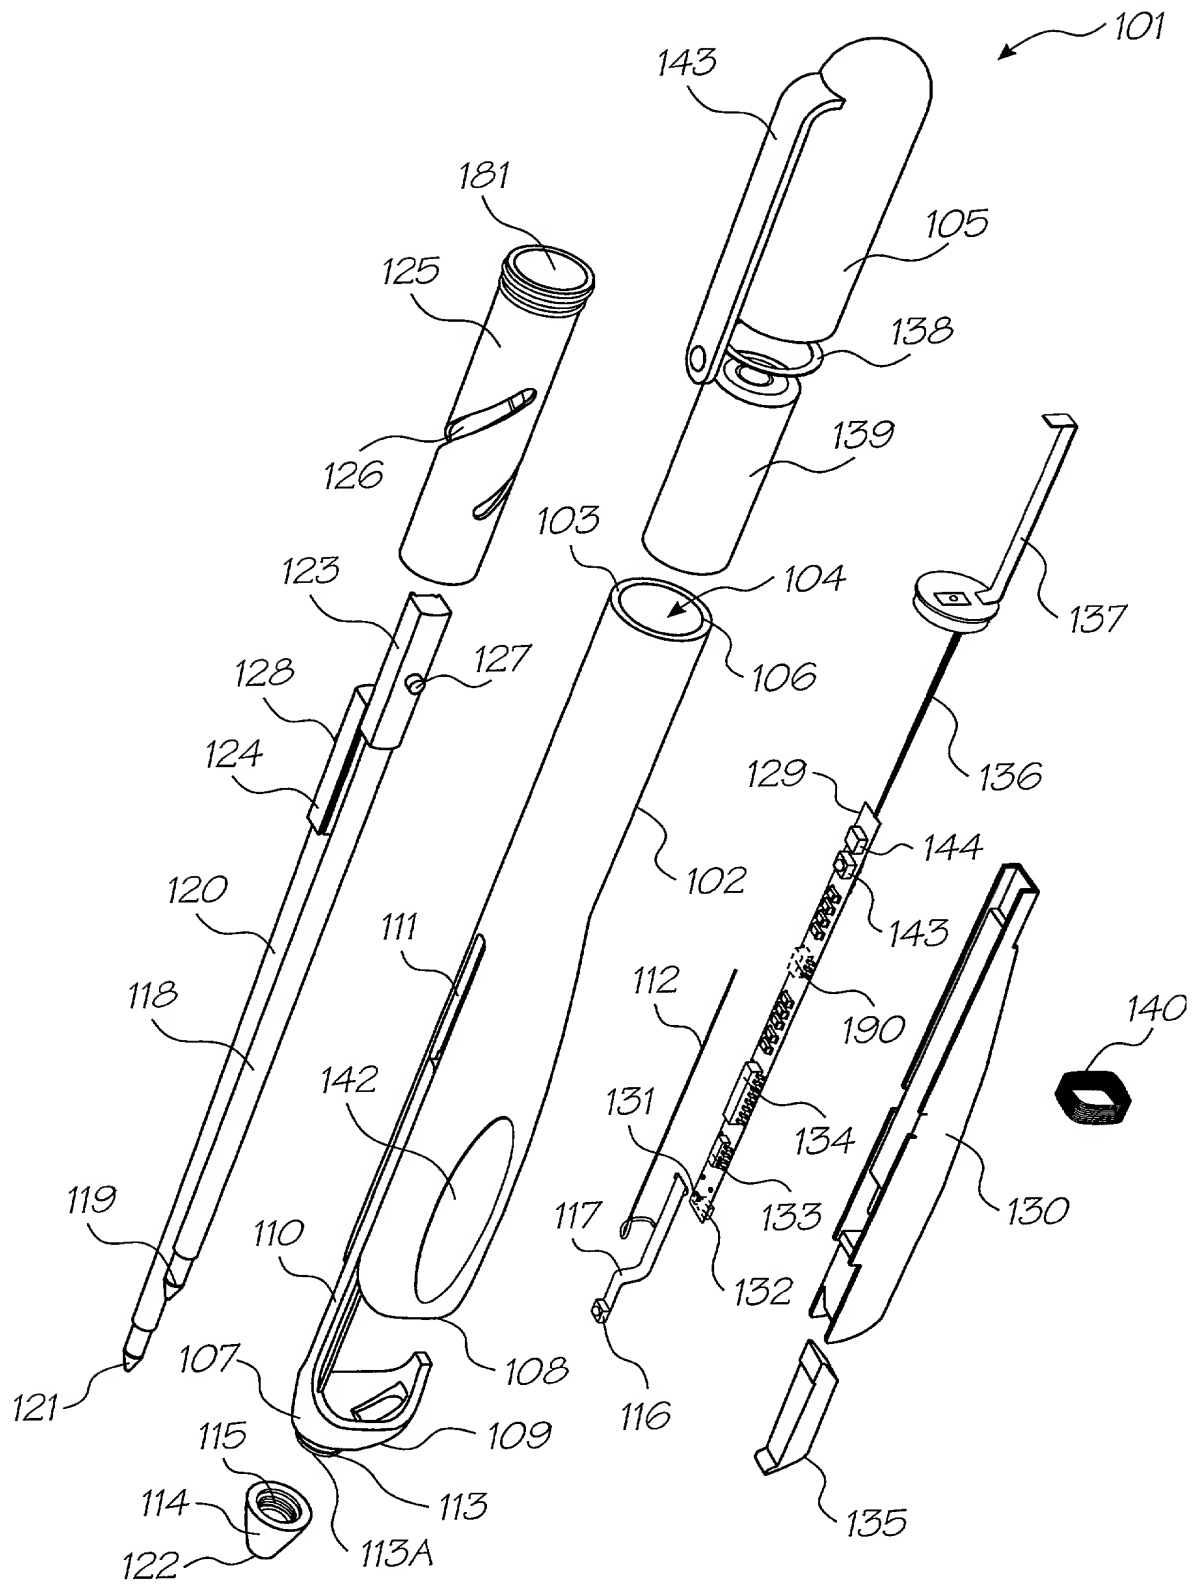


FIG. 9

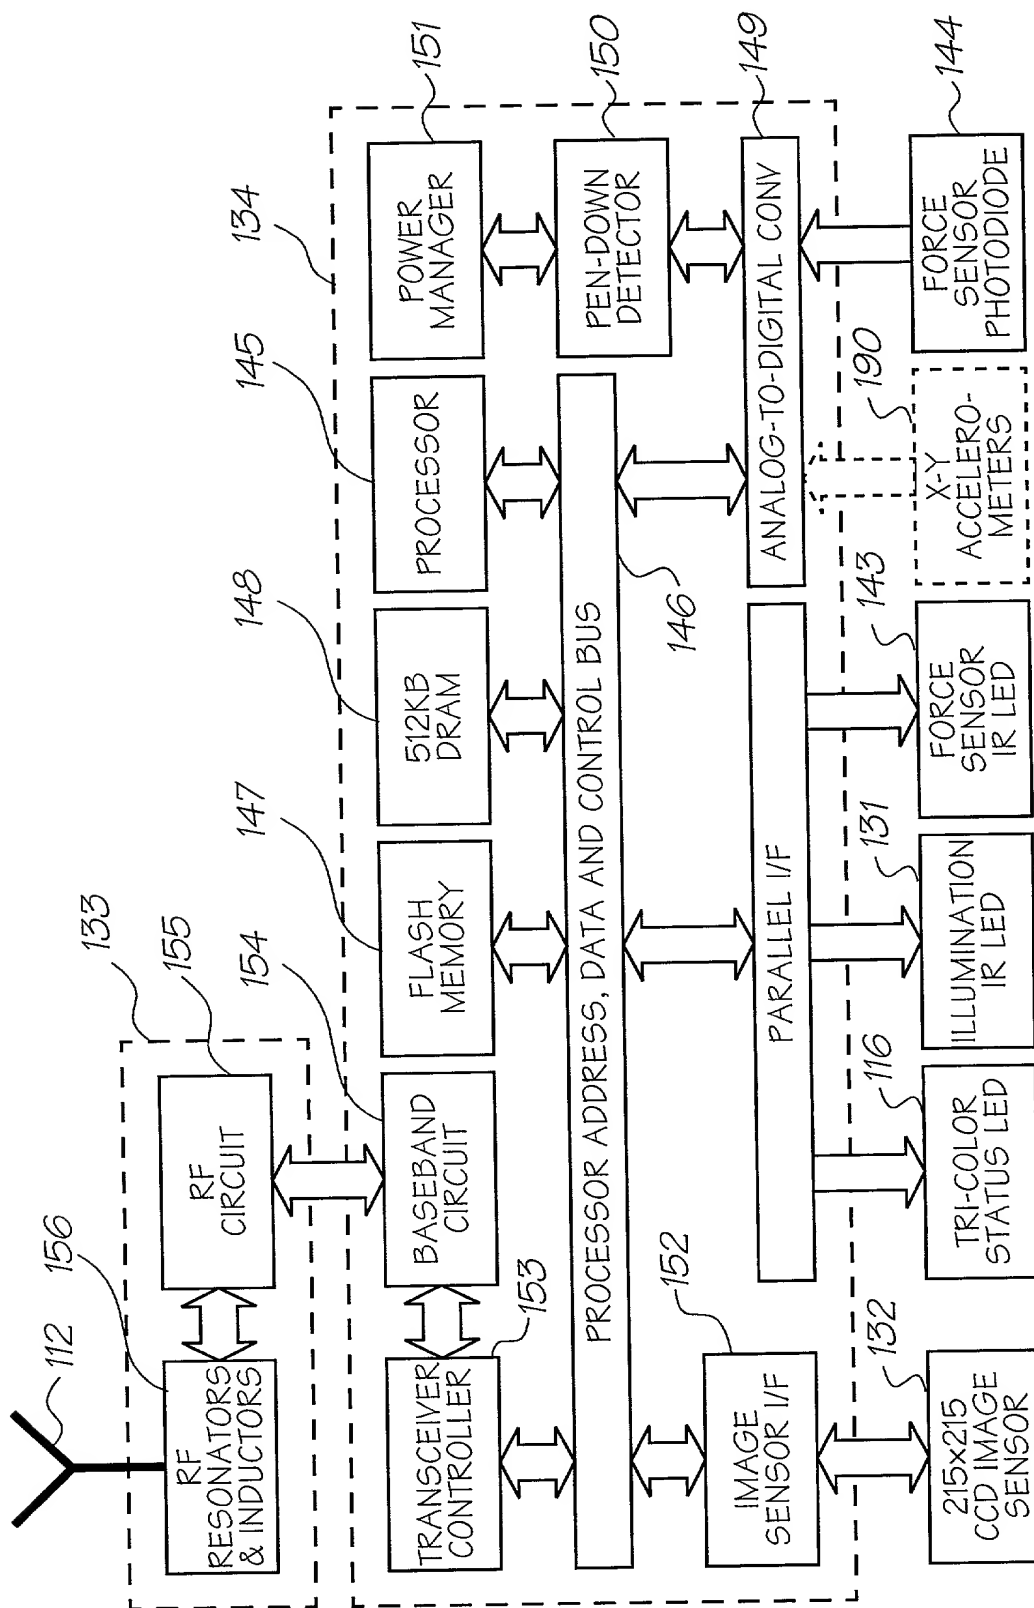


FIG. 10

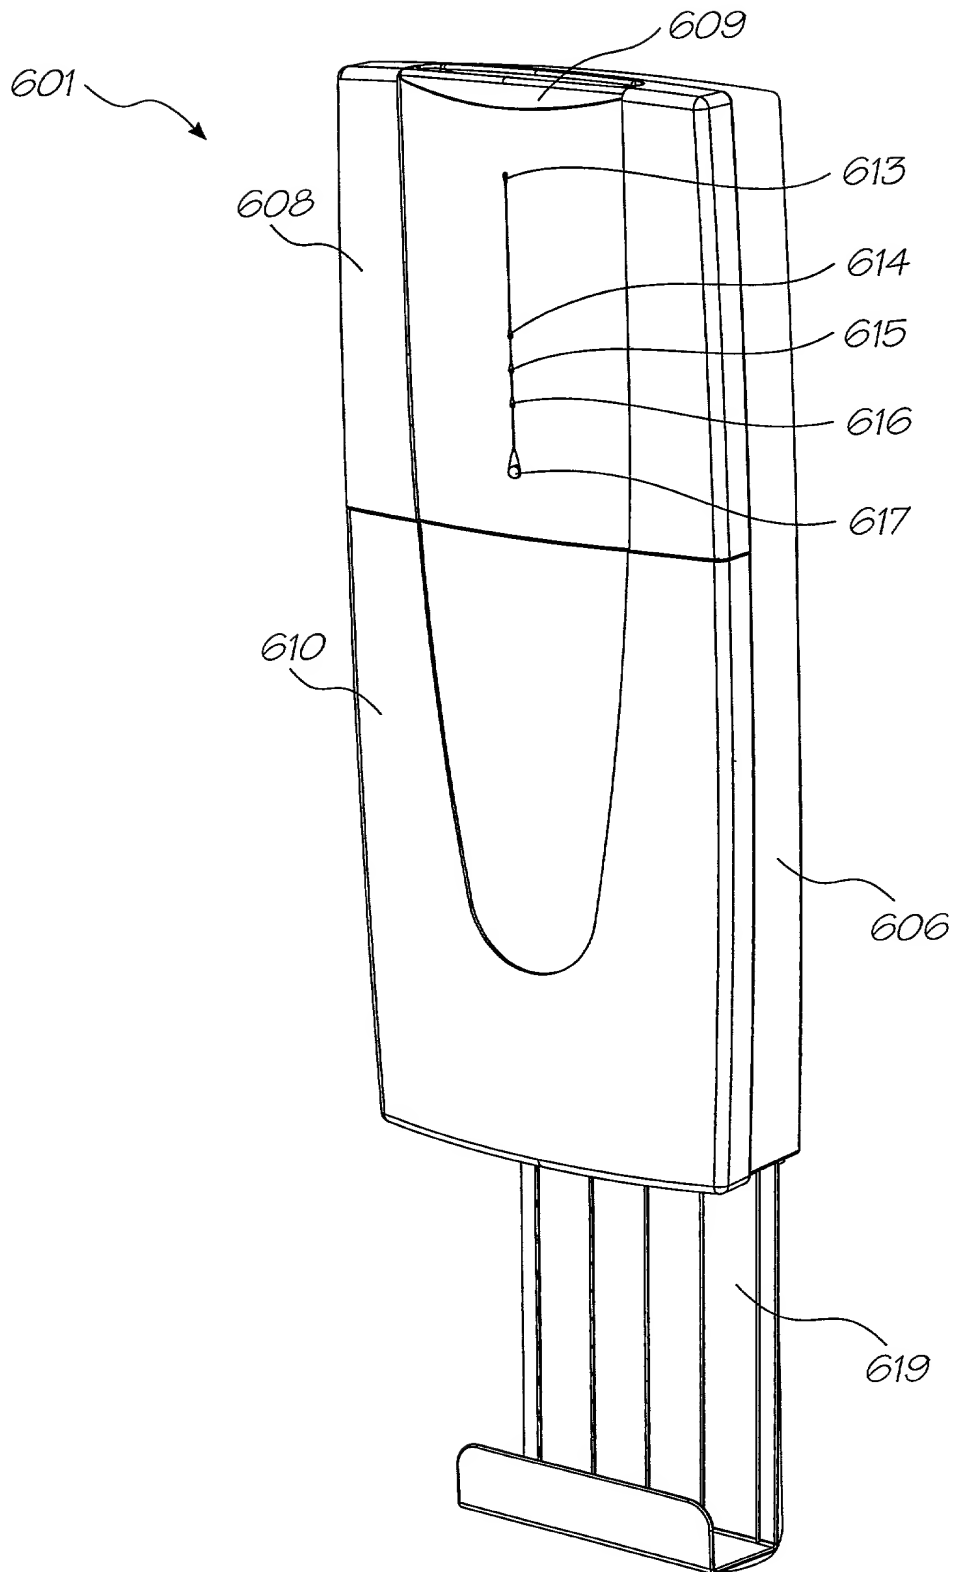


FIG. 11

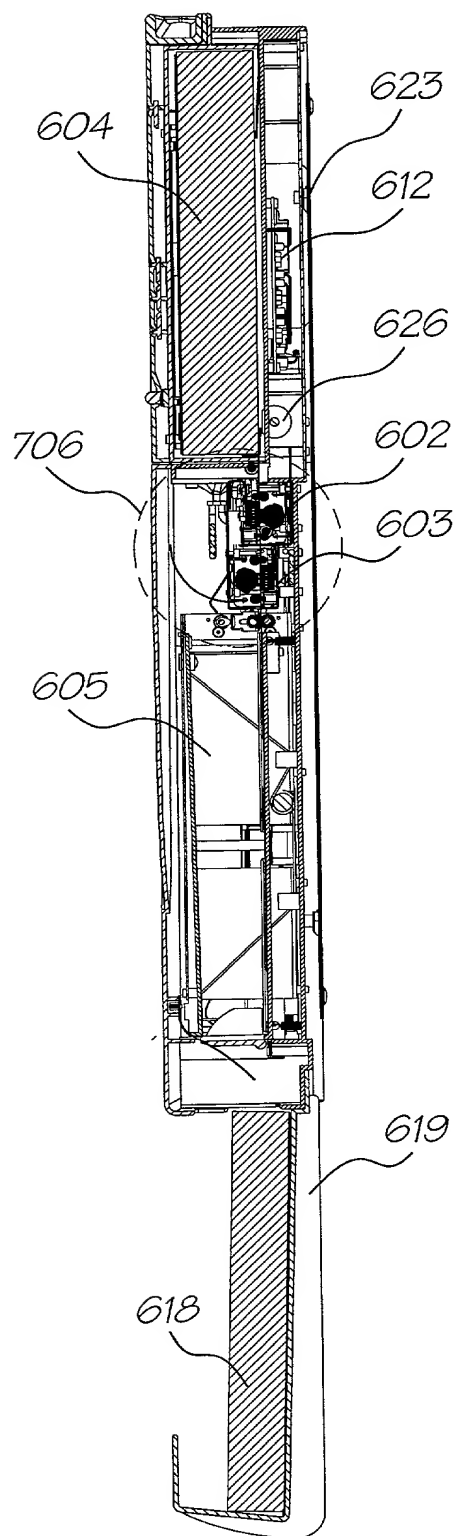



FIG. 12

[illegible]

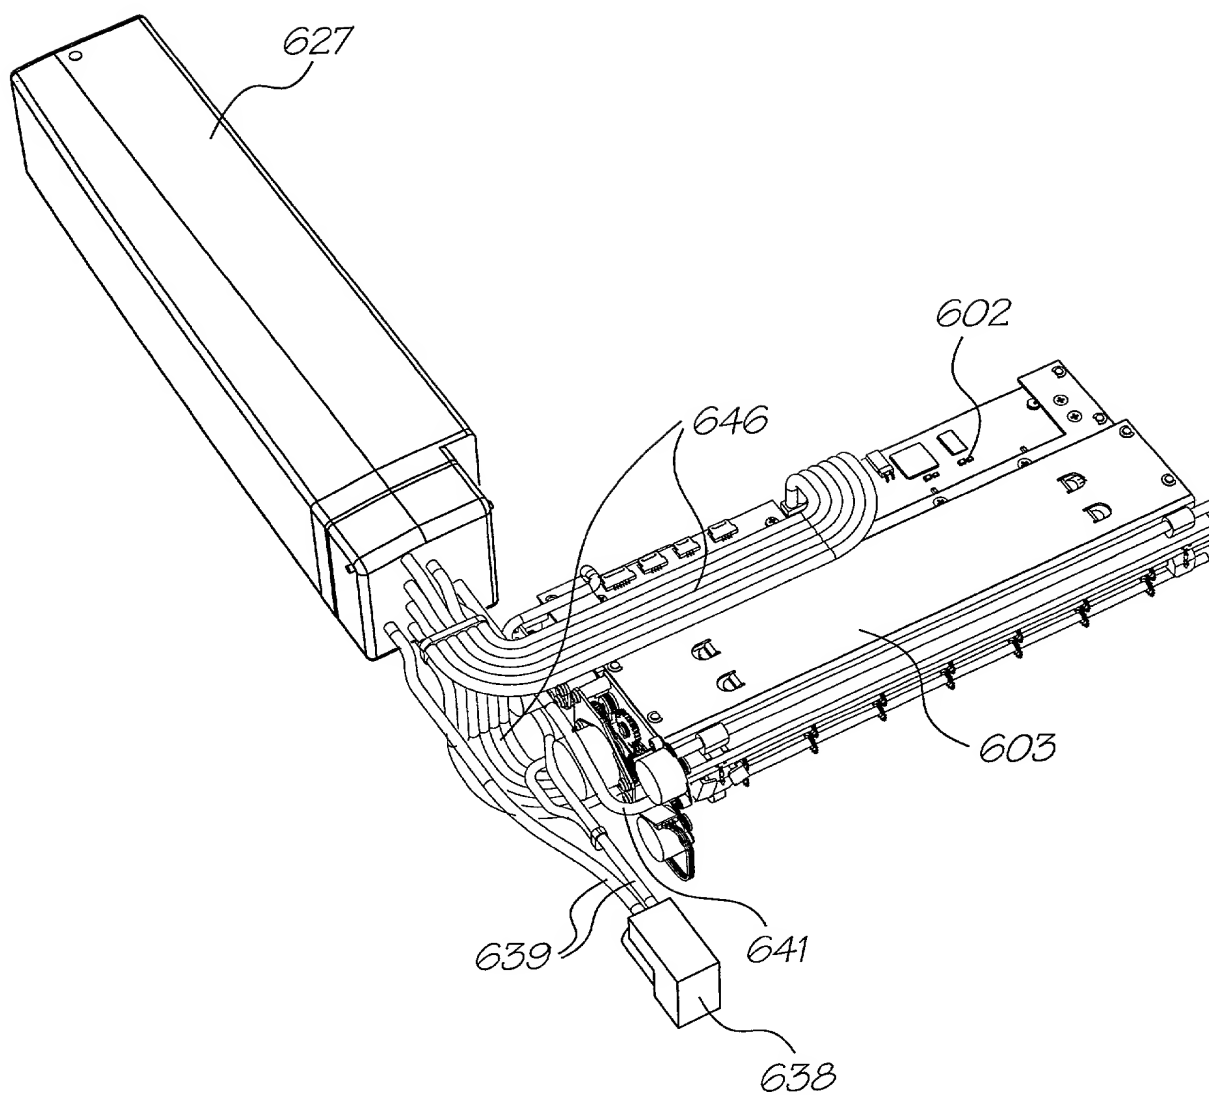


FIG. 13

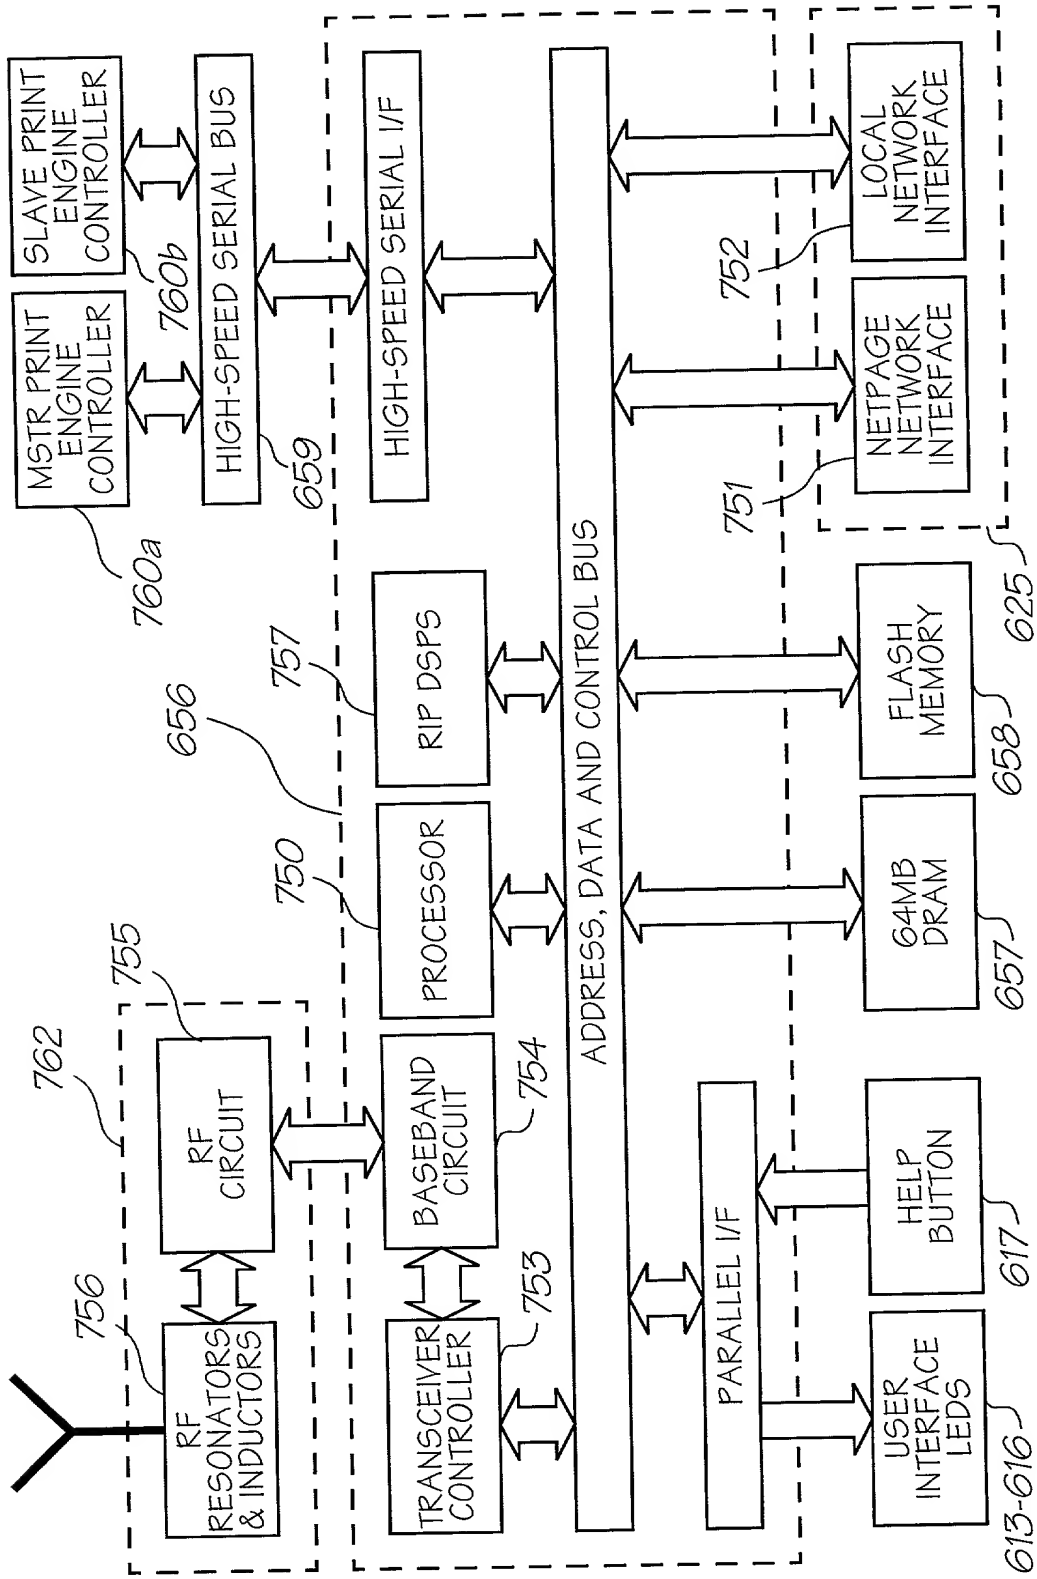


FIG. 14

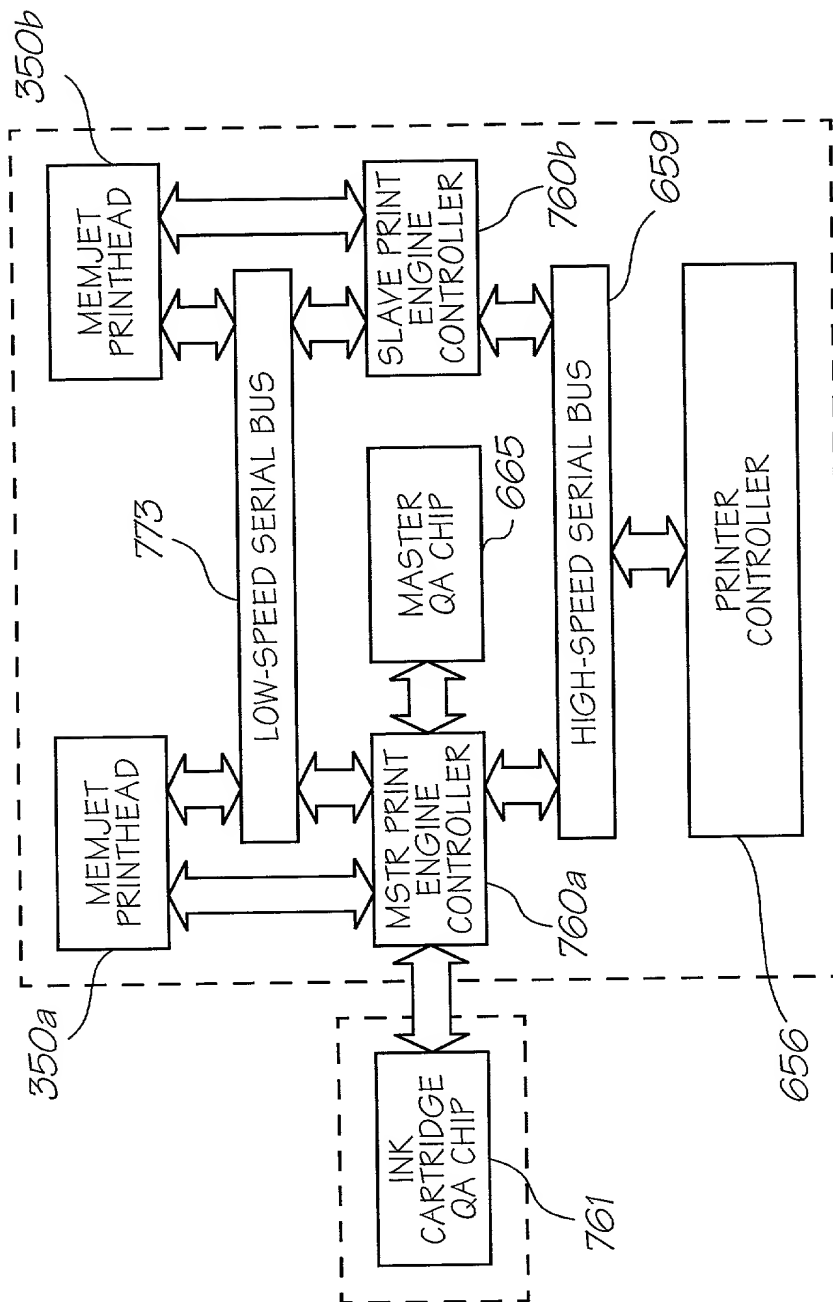


FIG. 15

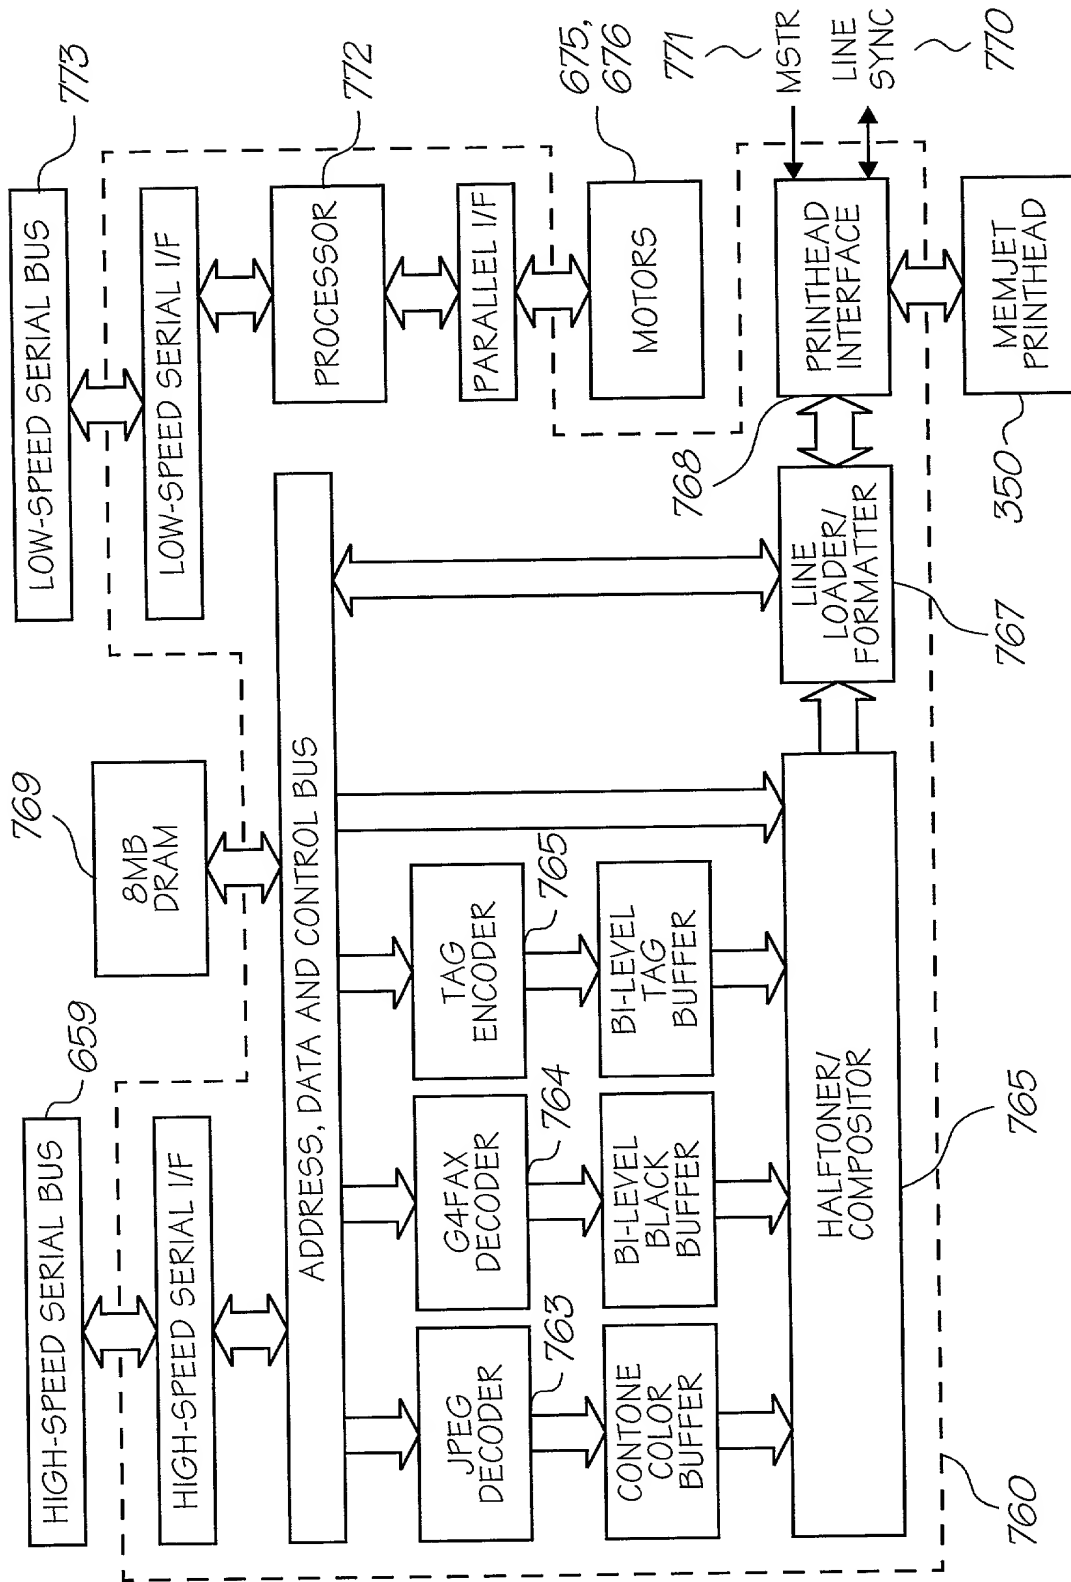


FIG. 16

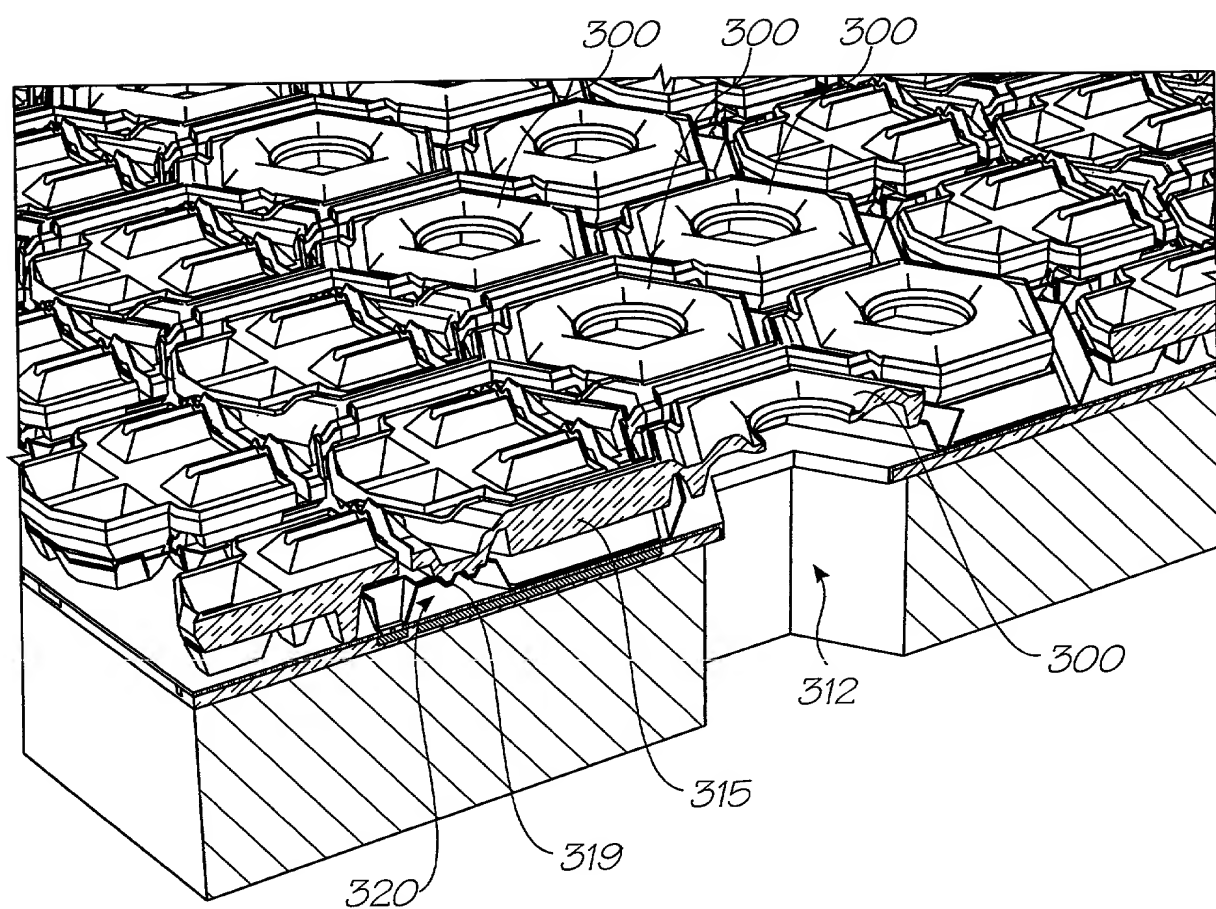


FIG. 18

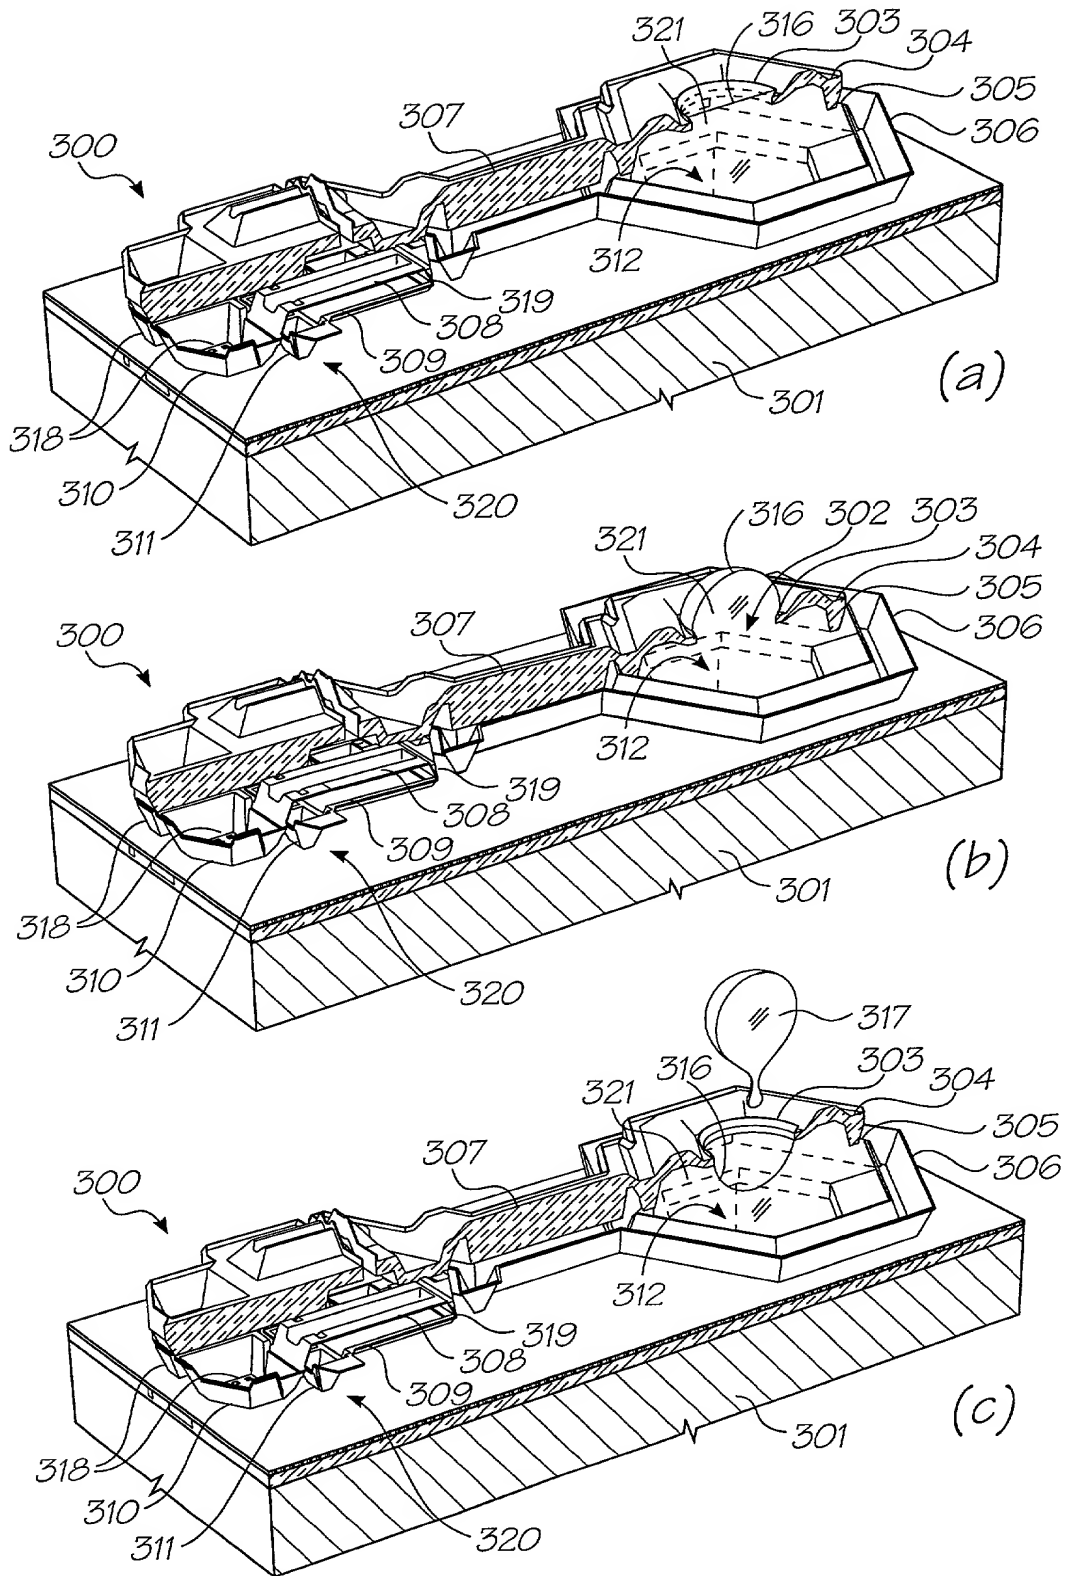


FIG. 19

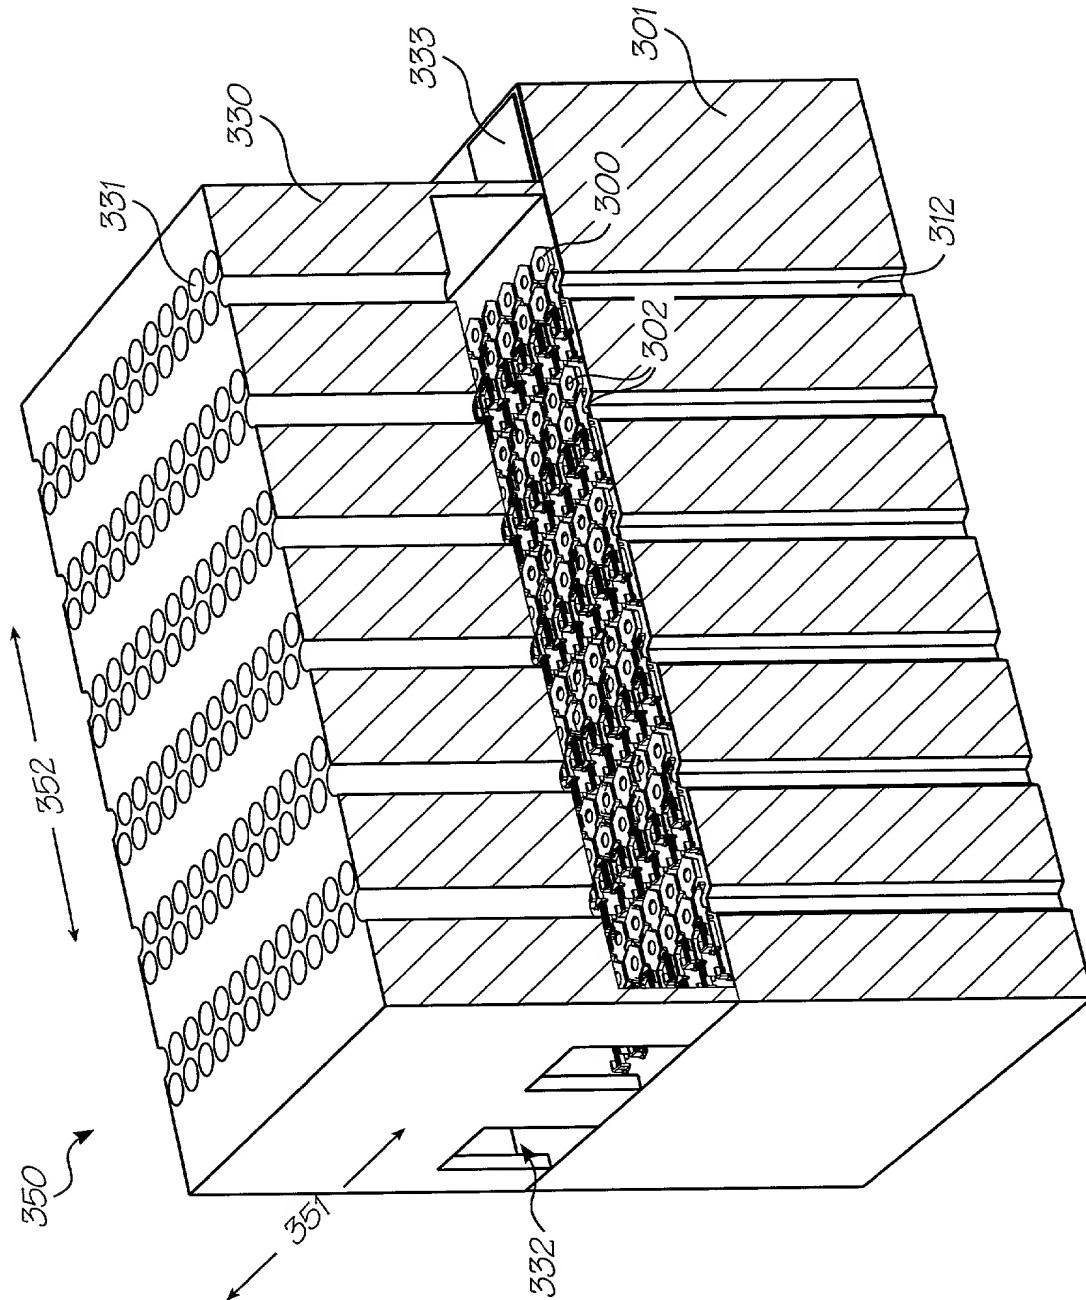


FIG. 20

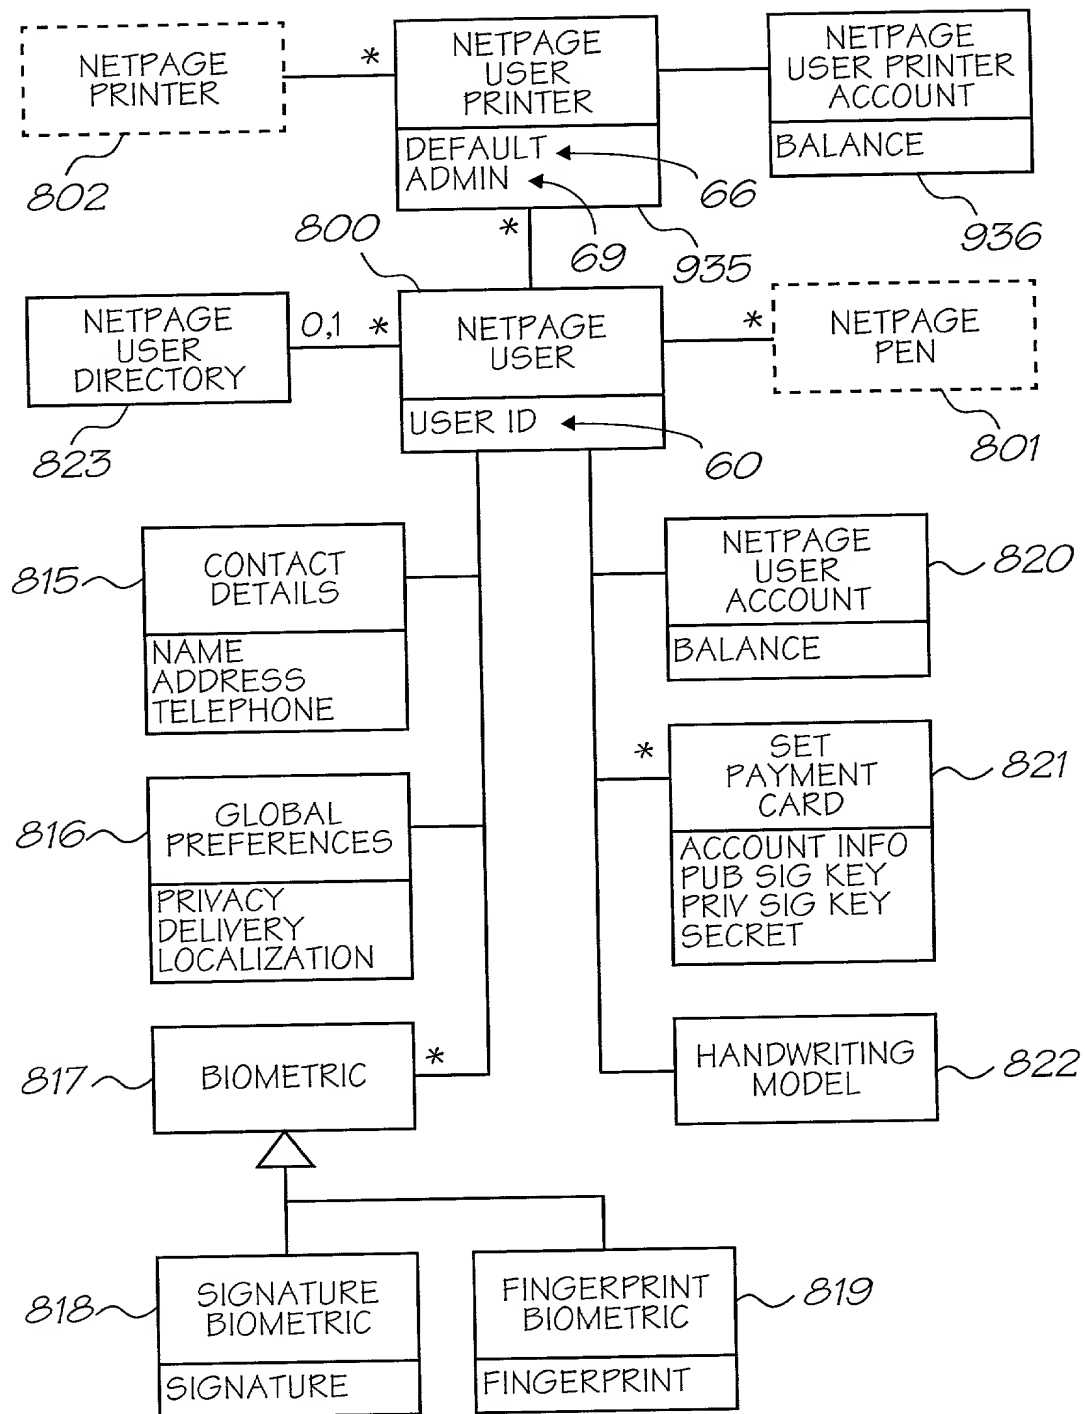


FIG. 21

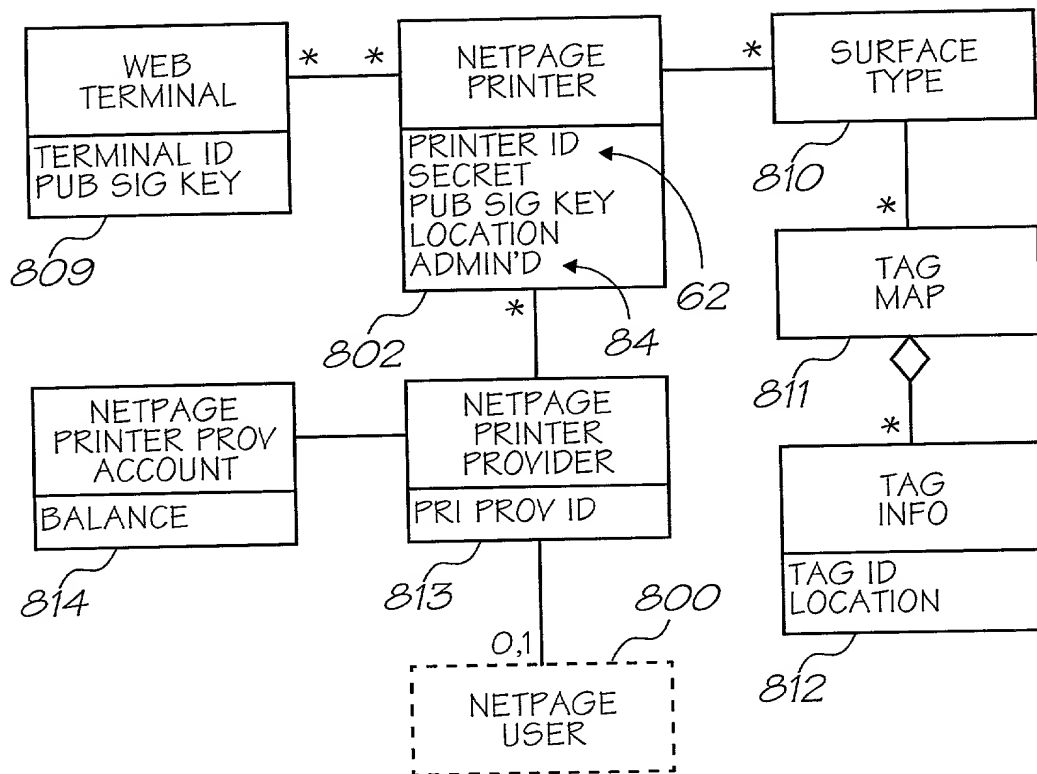


FIG. 22

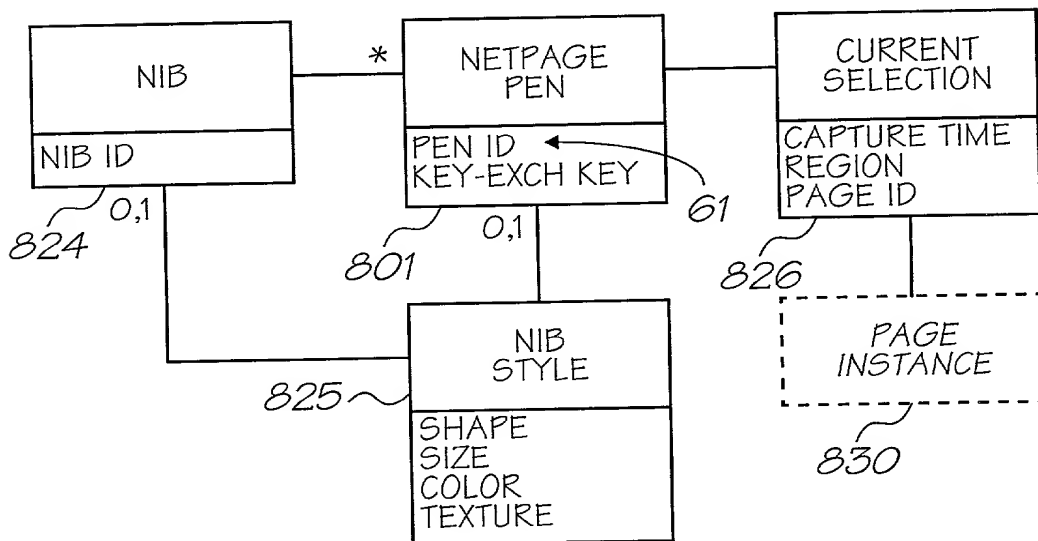


FIG. 23



Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	0.5	0.5	0	1
Marital Status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	3500	1500	1000	8000
Health Status	0.7	0.4	0	1
Employment Status	0.8	0.4	0	1
Stress Level	4.5	1.5	1	7
Life Satisfaction	5.5	1.5	1	9
Resilience Score	6.5	1.5	1	9
Optimism Level	5.5	1.5	1	9
Gratitude Score	6.5	1.5	1	9
Self-Esteem	5.5	1.5	1	9
Emotional Stability	5.5	1.5	1	9
Life Purpose	6.5	1.5	1	9
Meaning in Life	6.5	1.5	1	9
Existential Well-being	6.5	1.5	1	9
Overall Well-being	6.5	1.5	1	9

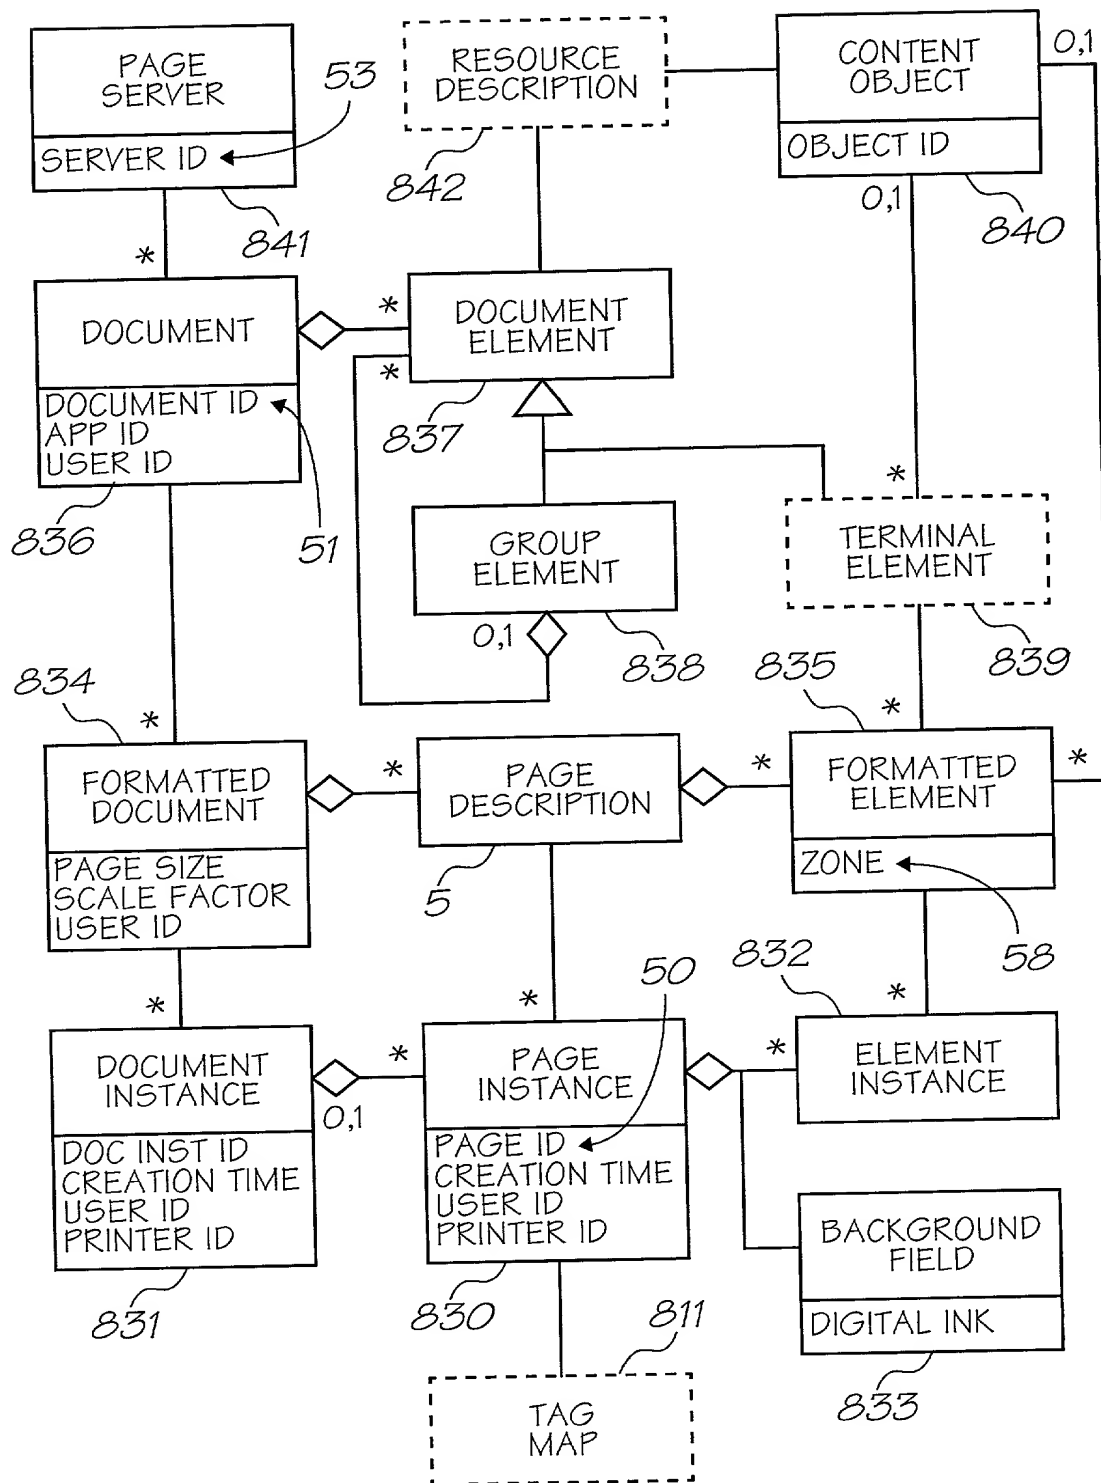


FIG. 25

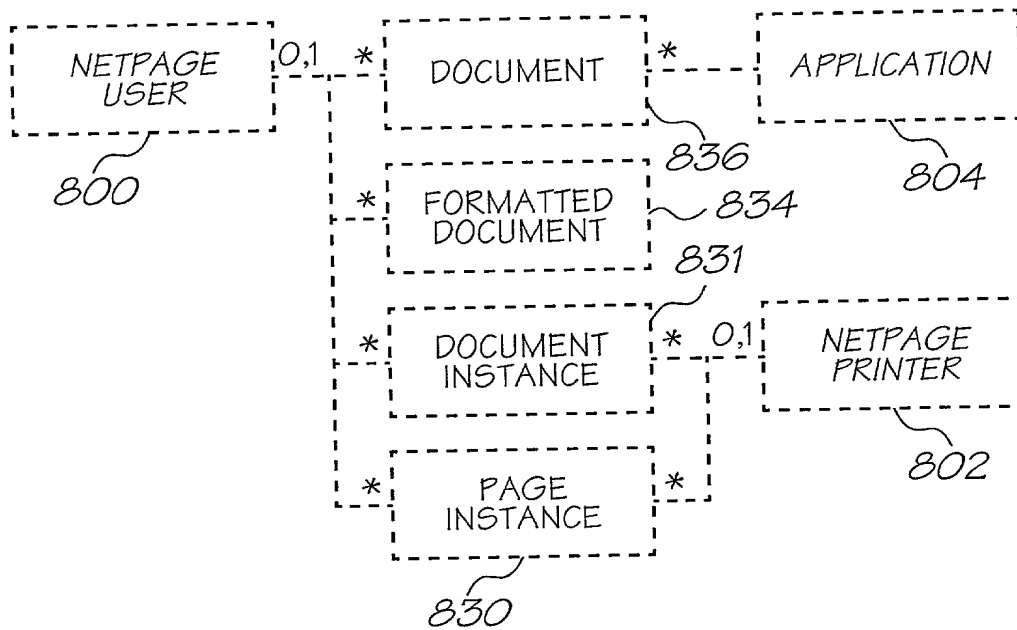


FIG. 26

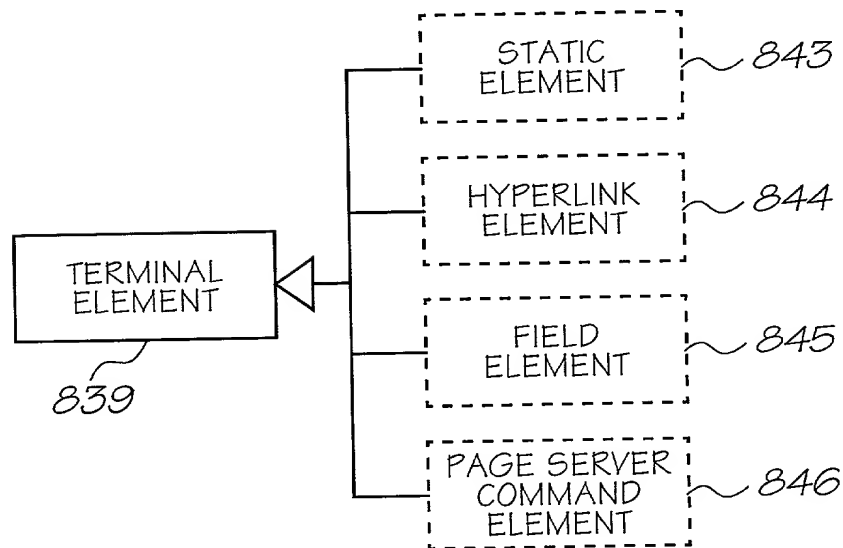


FIG. 27

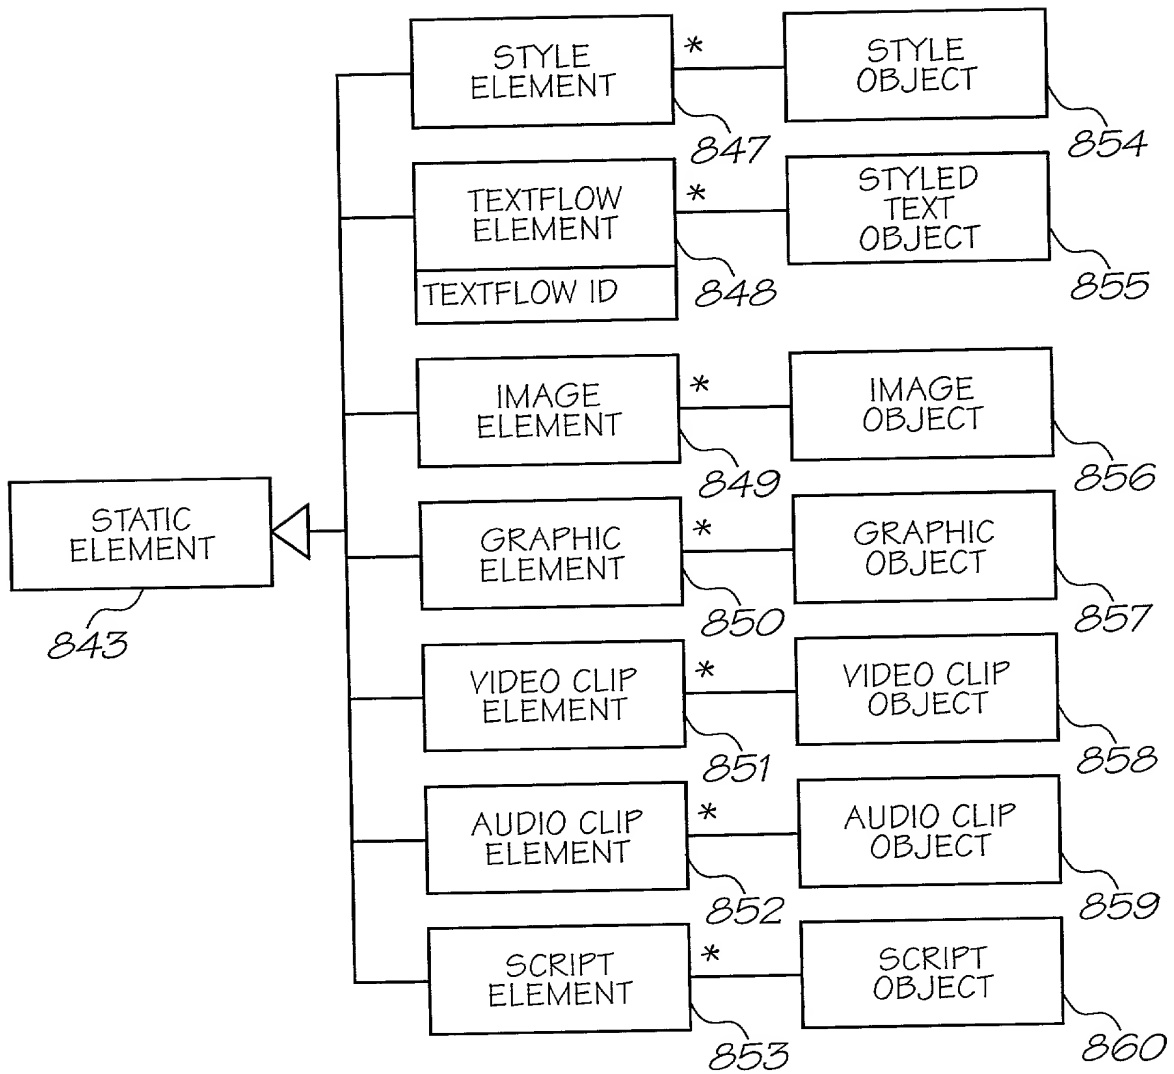


FIG. 28

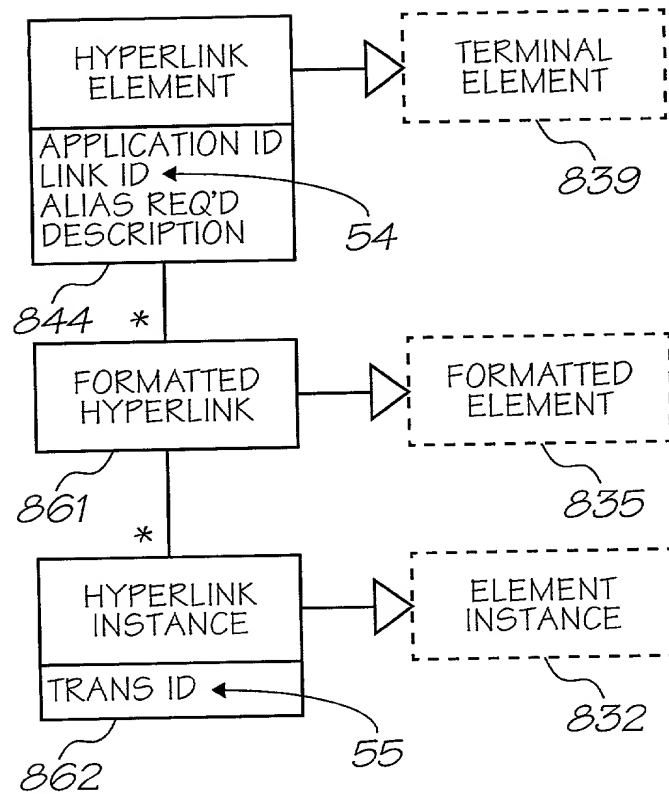


FIG. 29

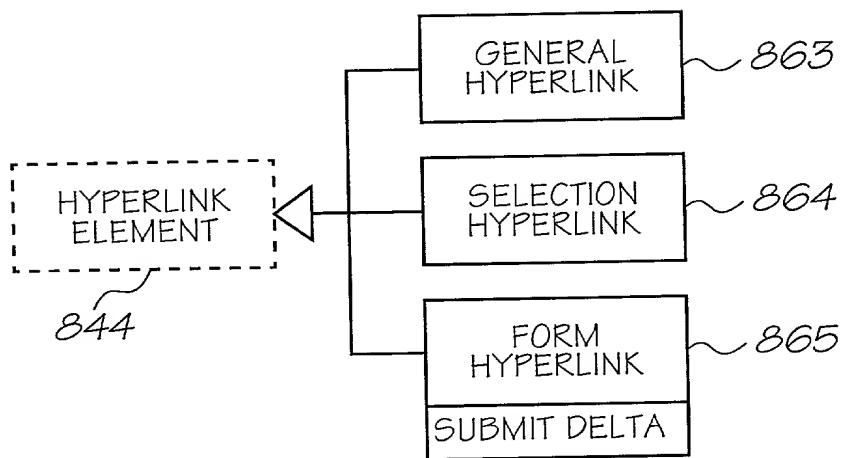


FIG. 30



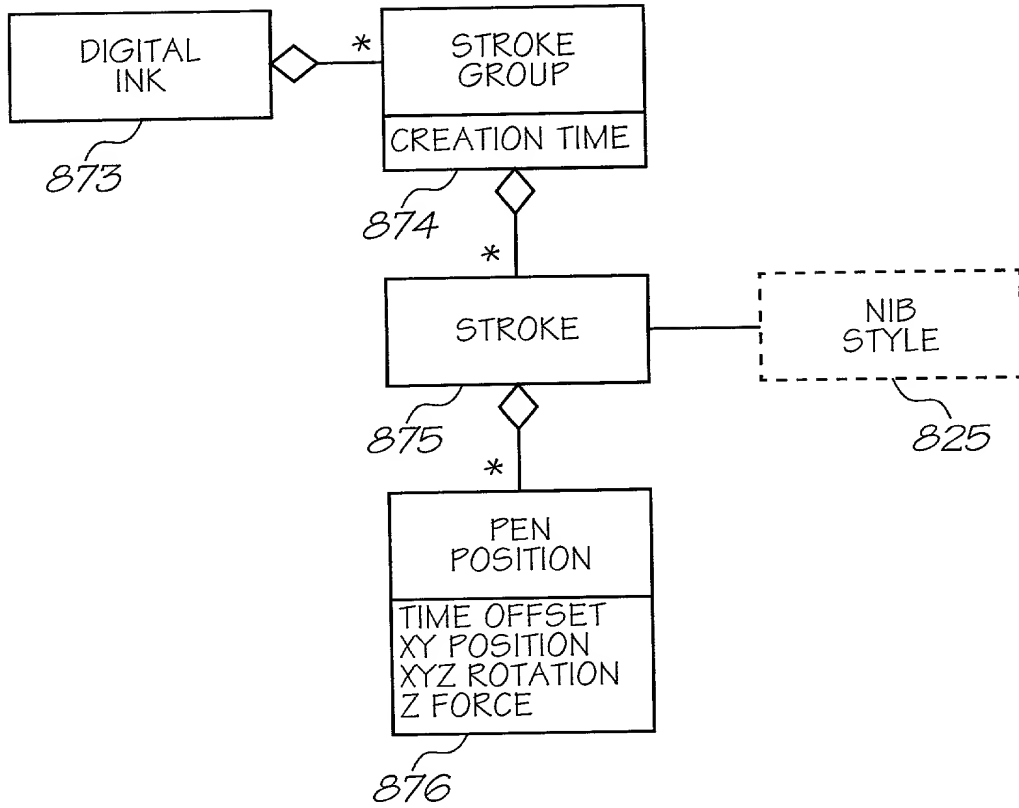


FIG. 33

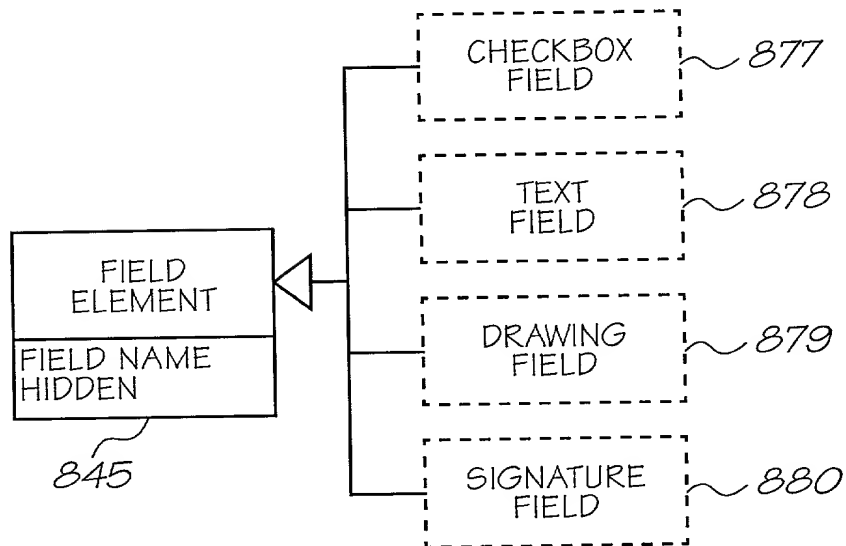


FIG. 34

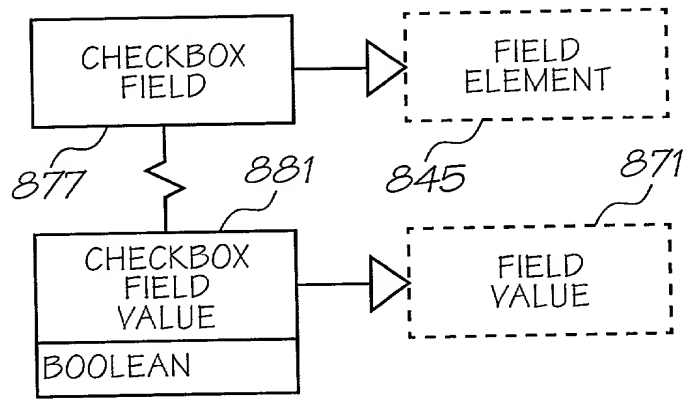


FIG. 35

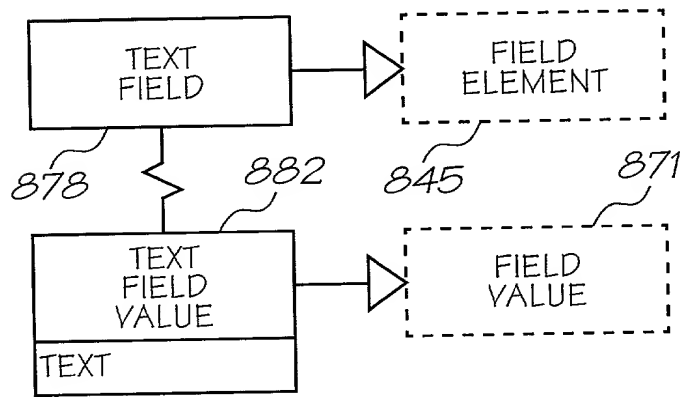


FIG. 36

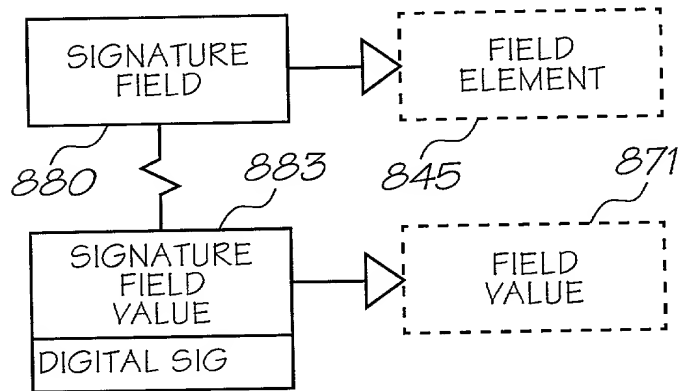


FIG. 37

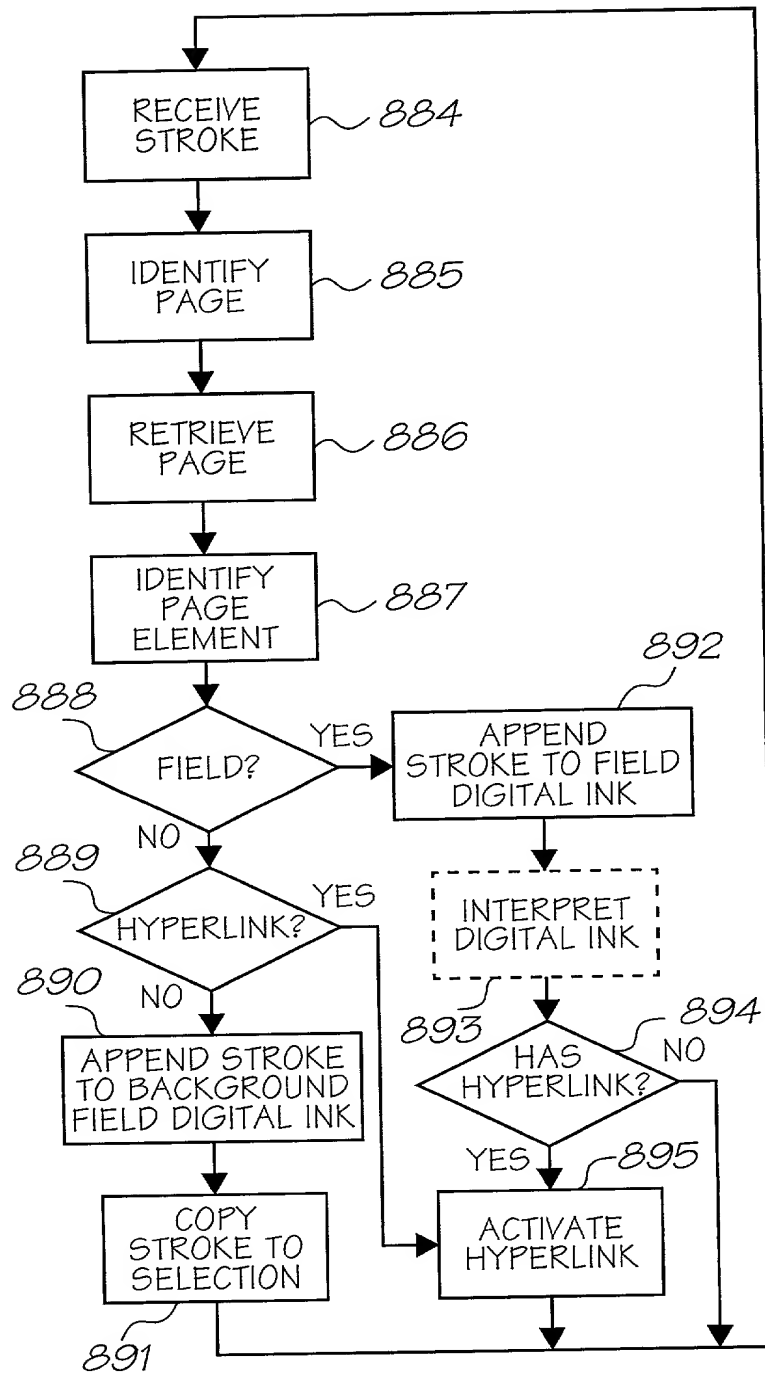


FIG. 38

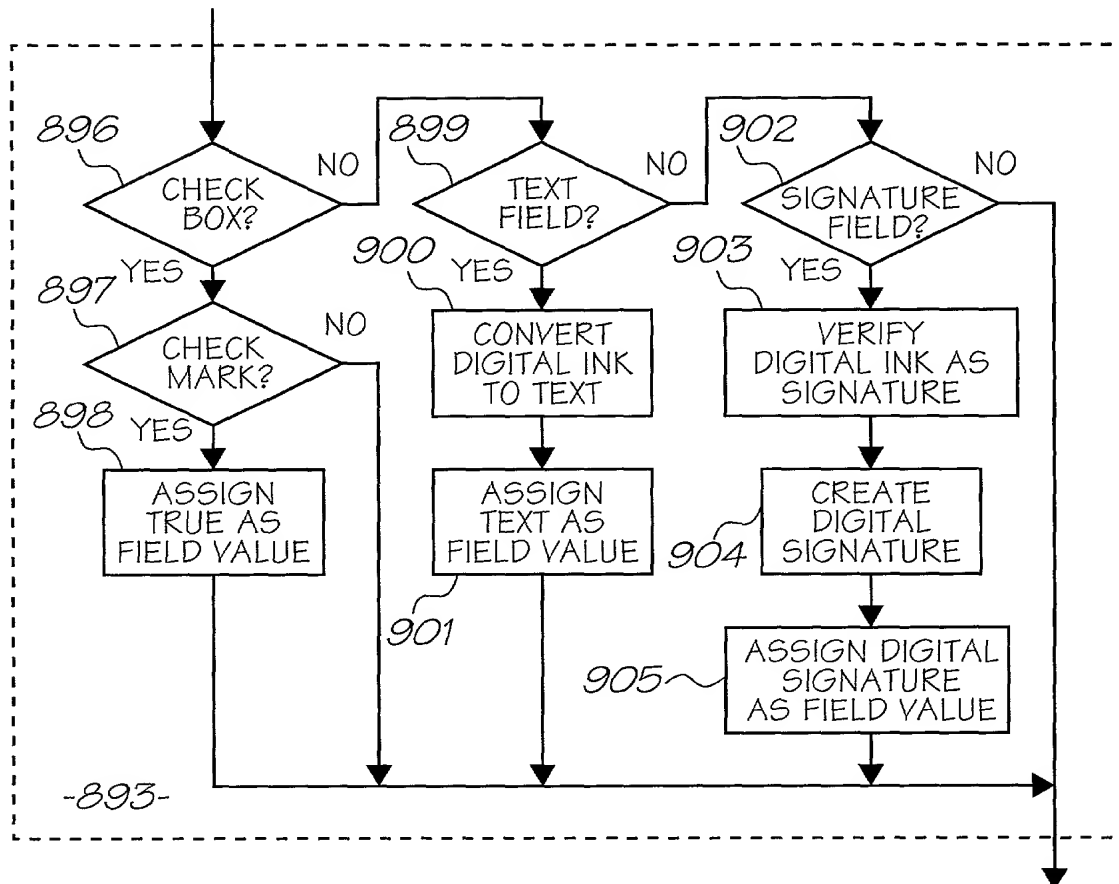


FIG. 38a

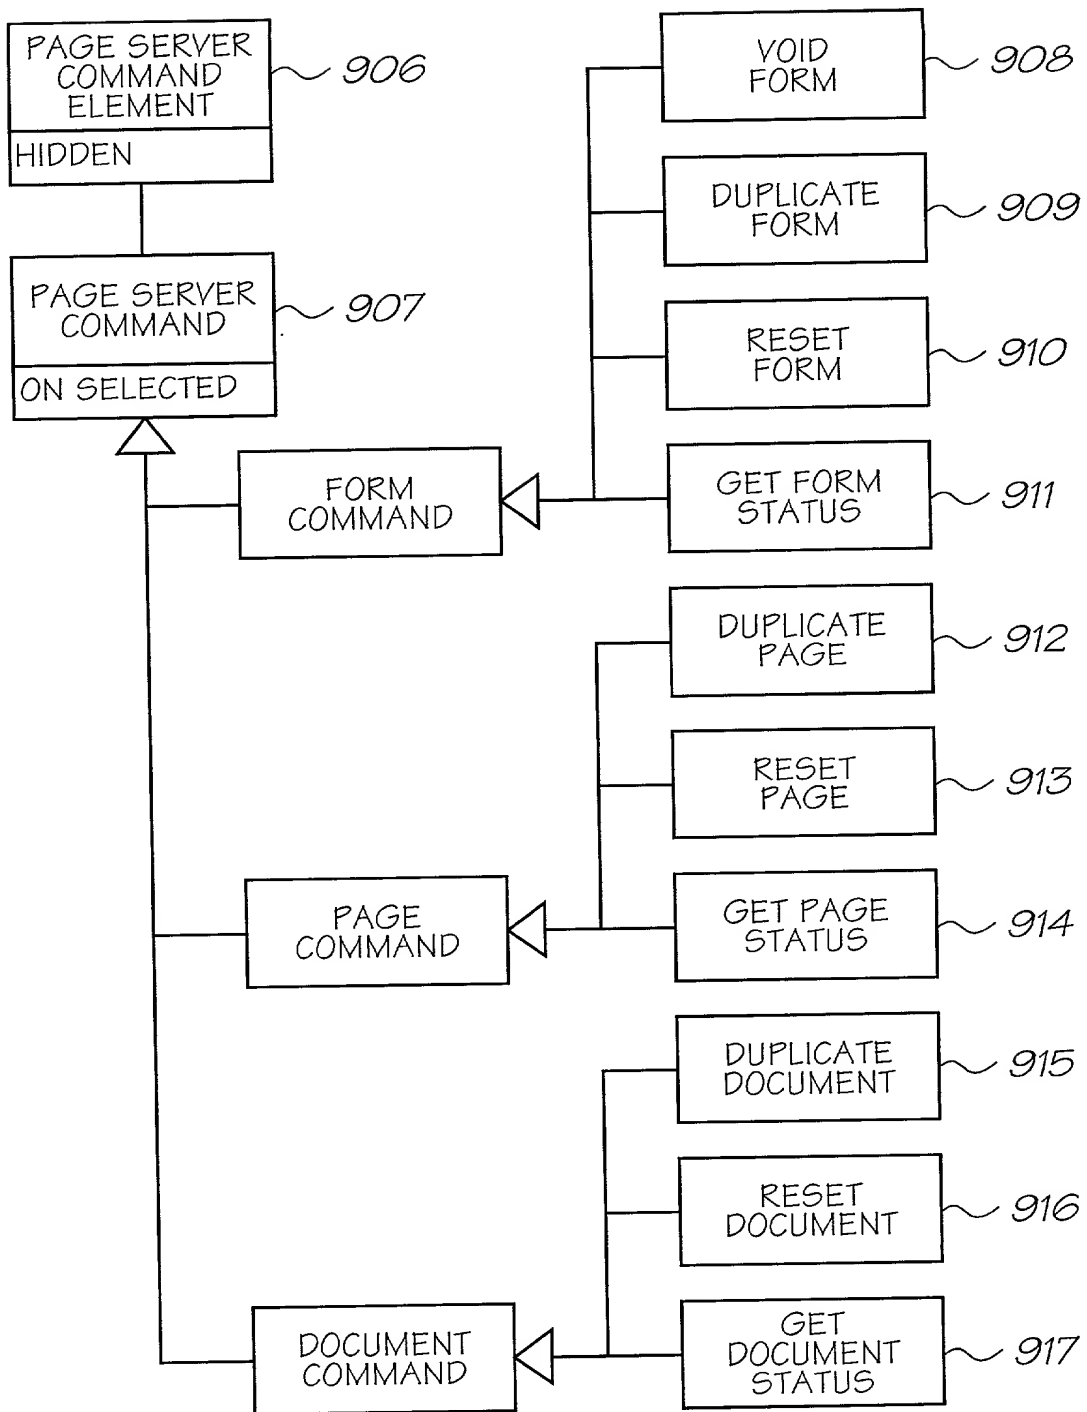


FIG. 39

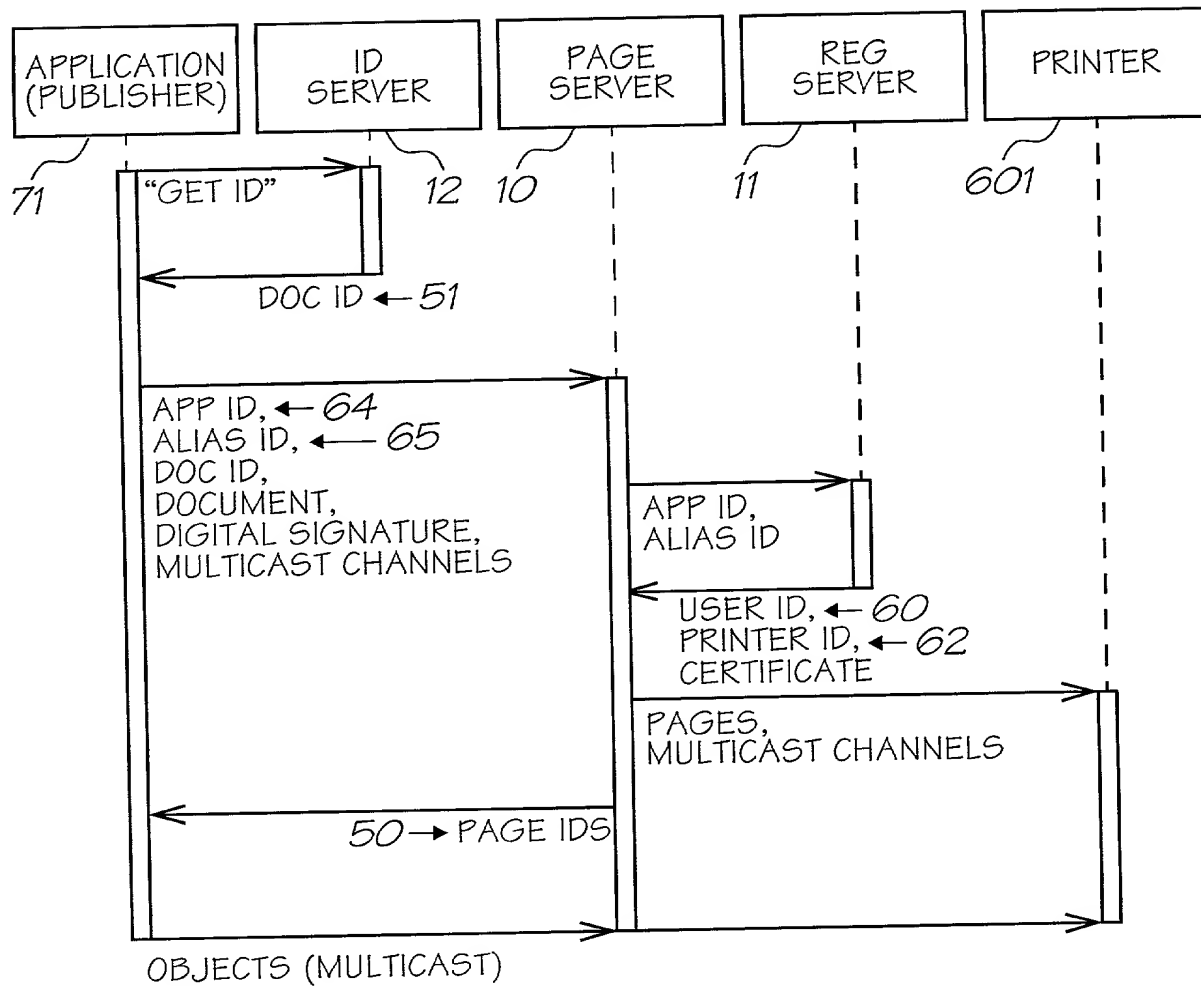


FIG. 40

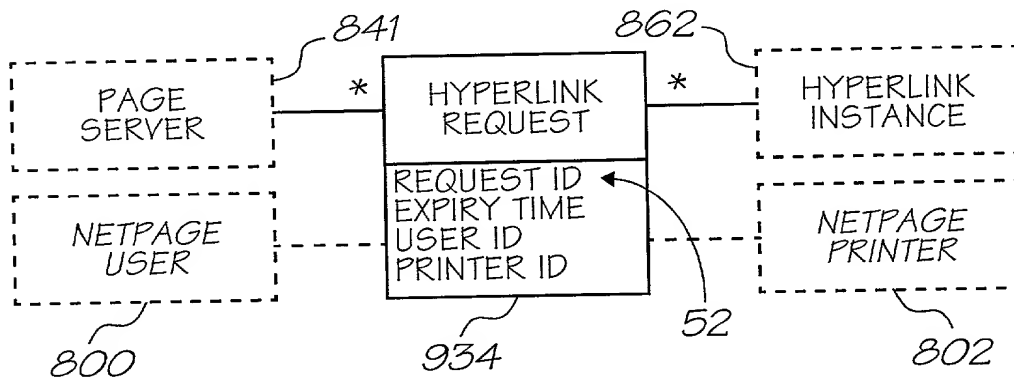


FIG. 41

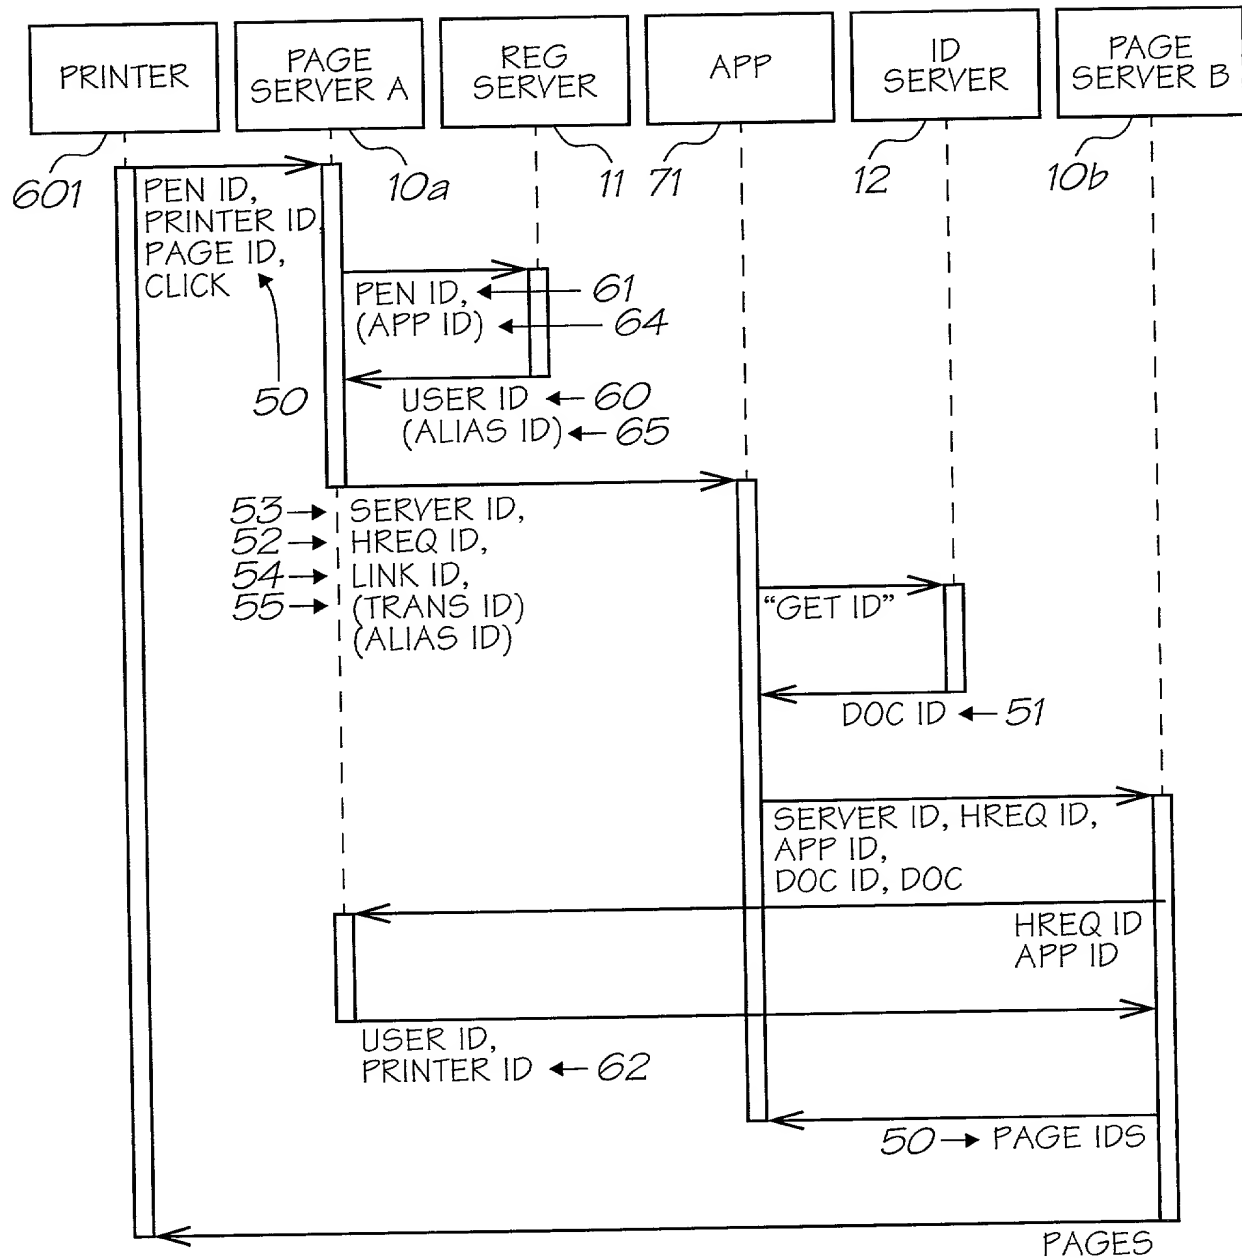


FIG. 42

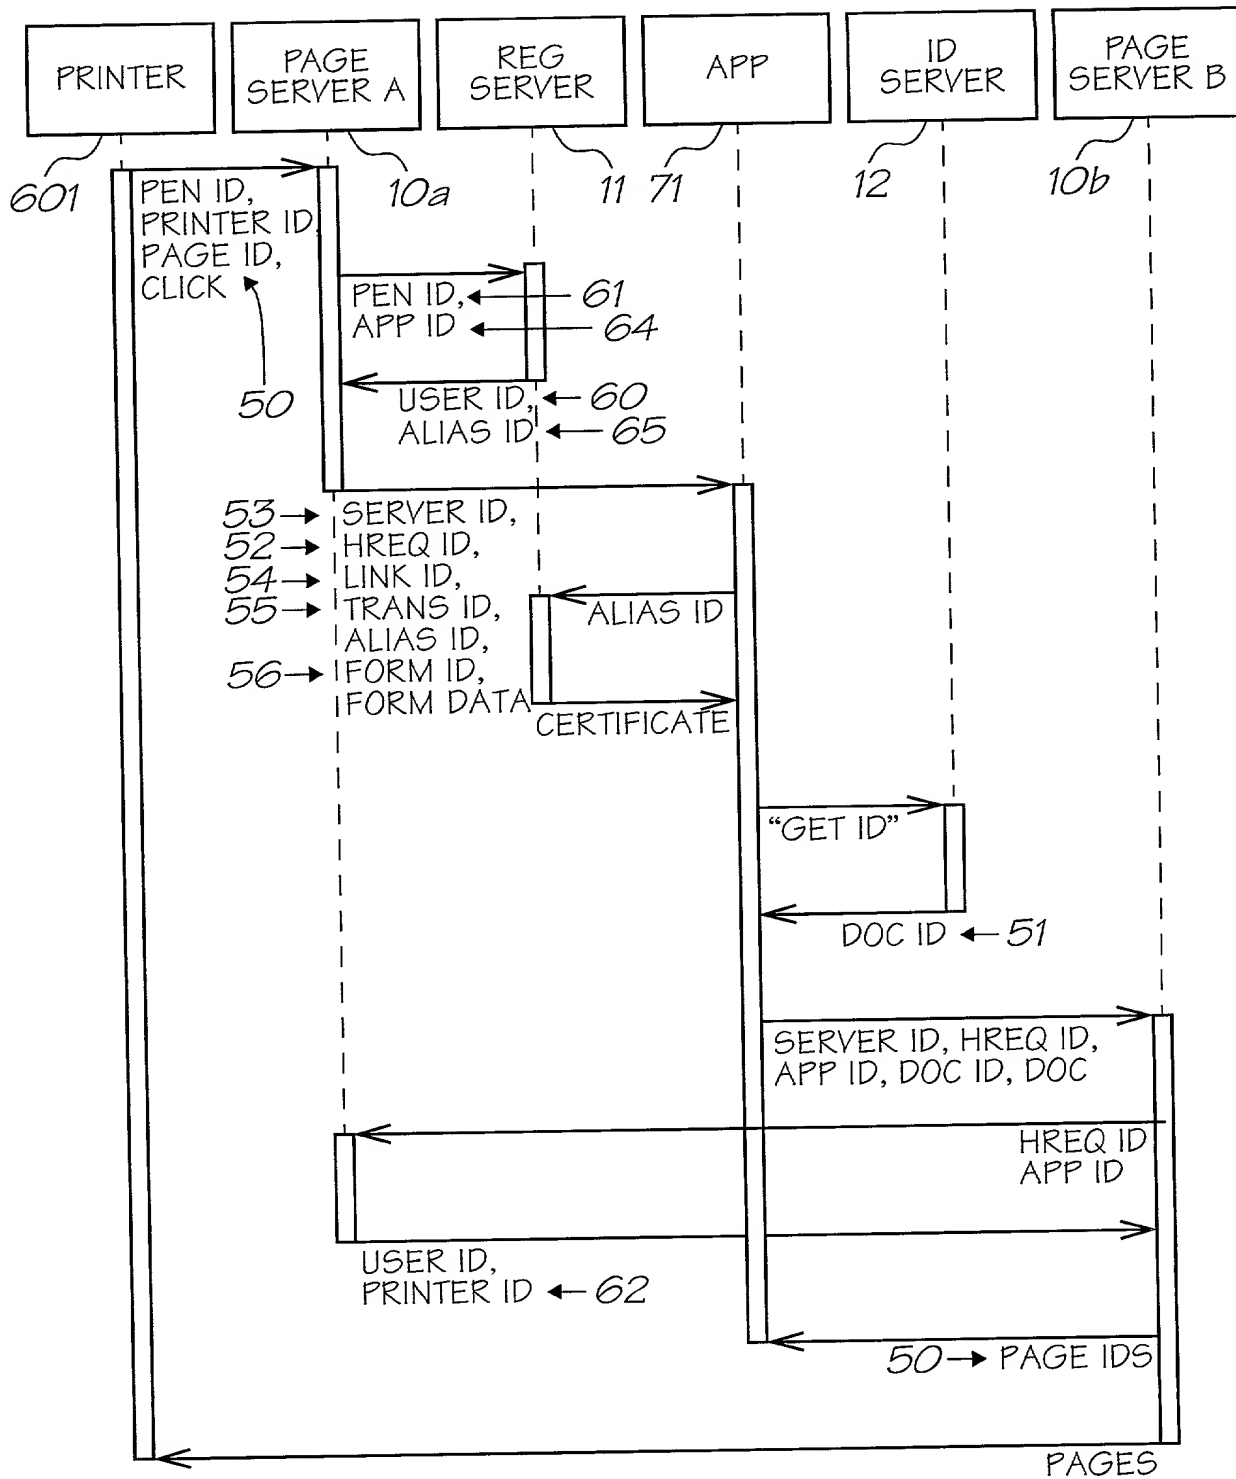


FIG. 43

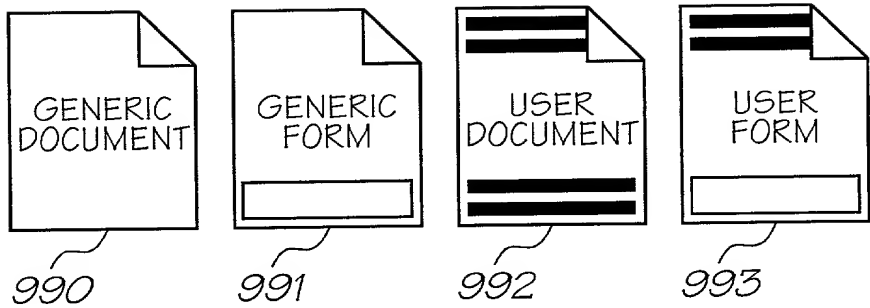


FIG. 44

FIXED INFORMATION ~ 994

VARIABLE INFORMATION ~ 995

COMMAND BUTTON ~ 996

INPUT FIELD ~ 997

● DRAGGABLE COMMAND ~ 998

HYPERTEXT LINK ~ 999

FIG. 45

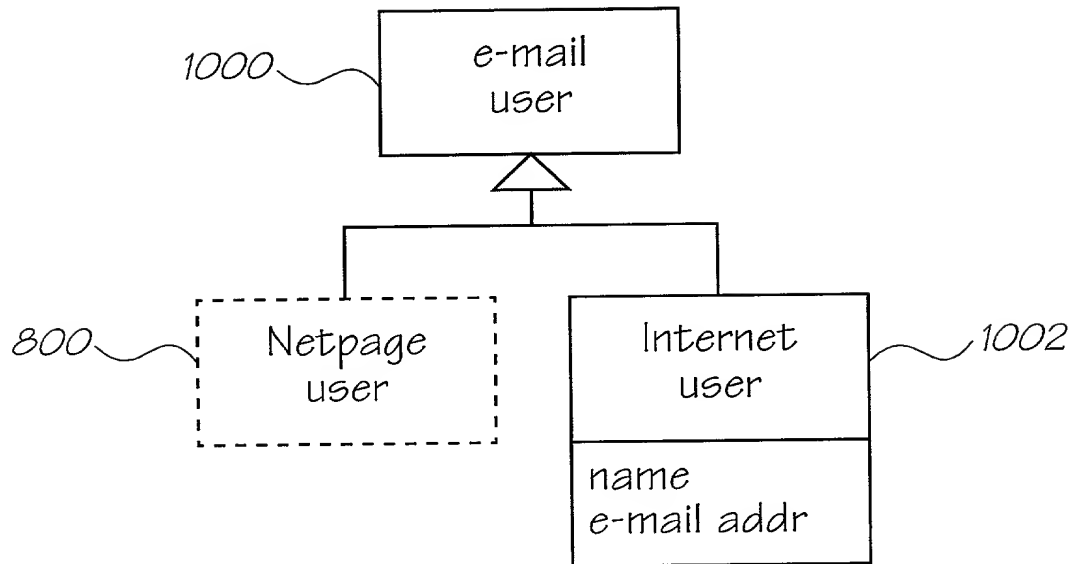


FIG. 46

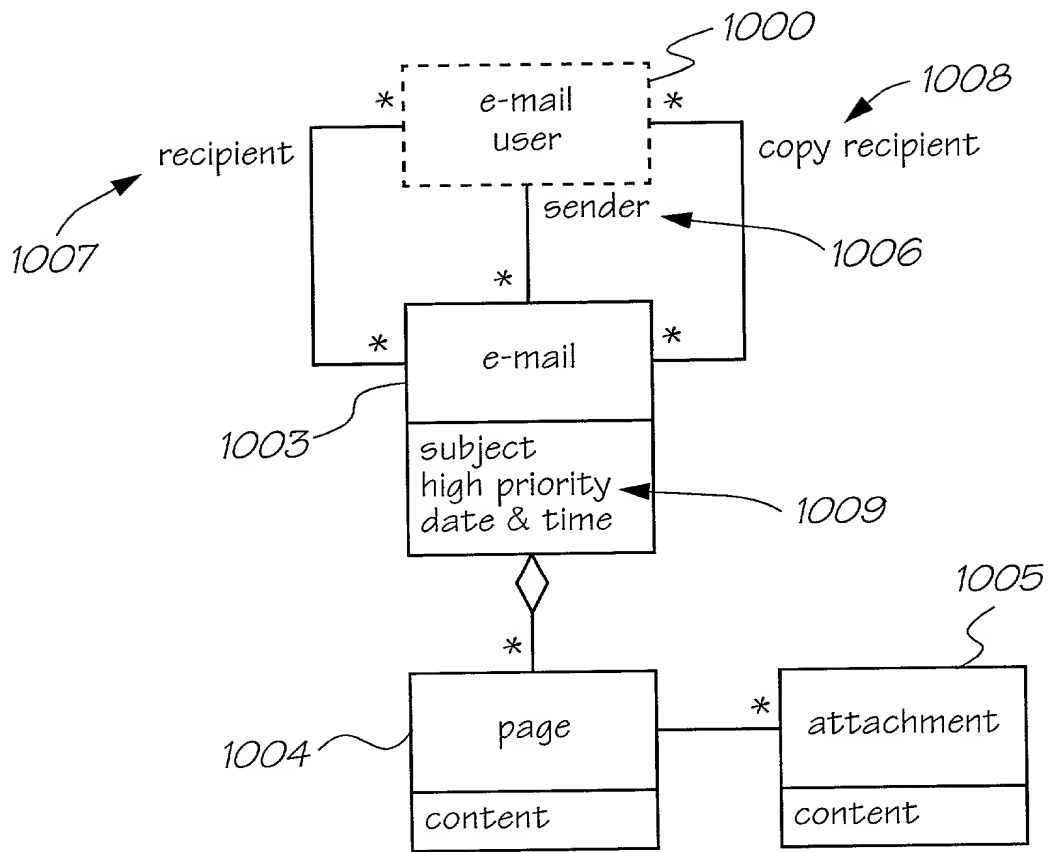


FIG. 47

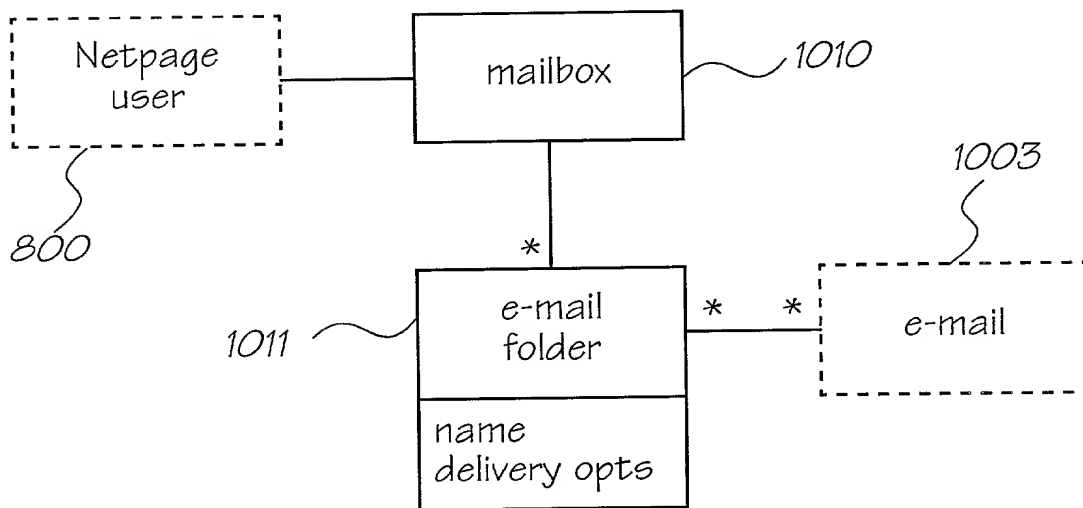


FIG. 48

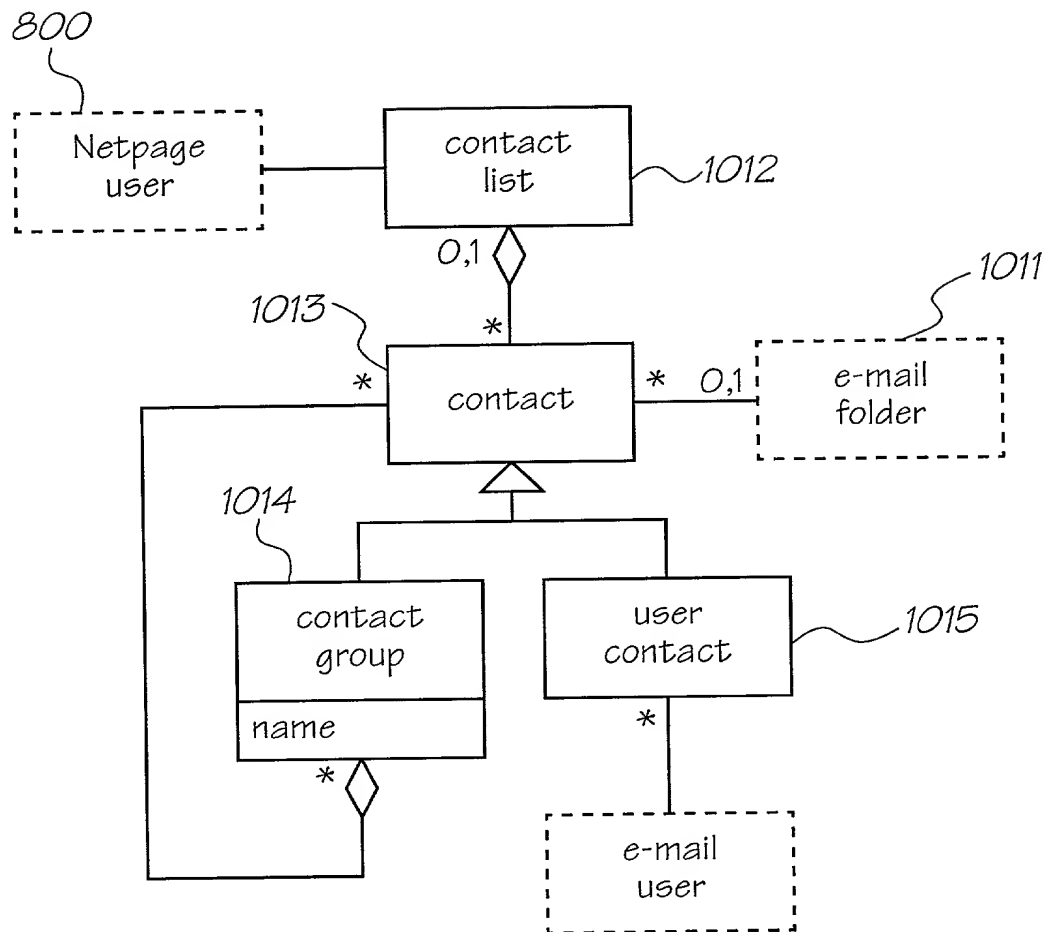


FIG. 49

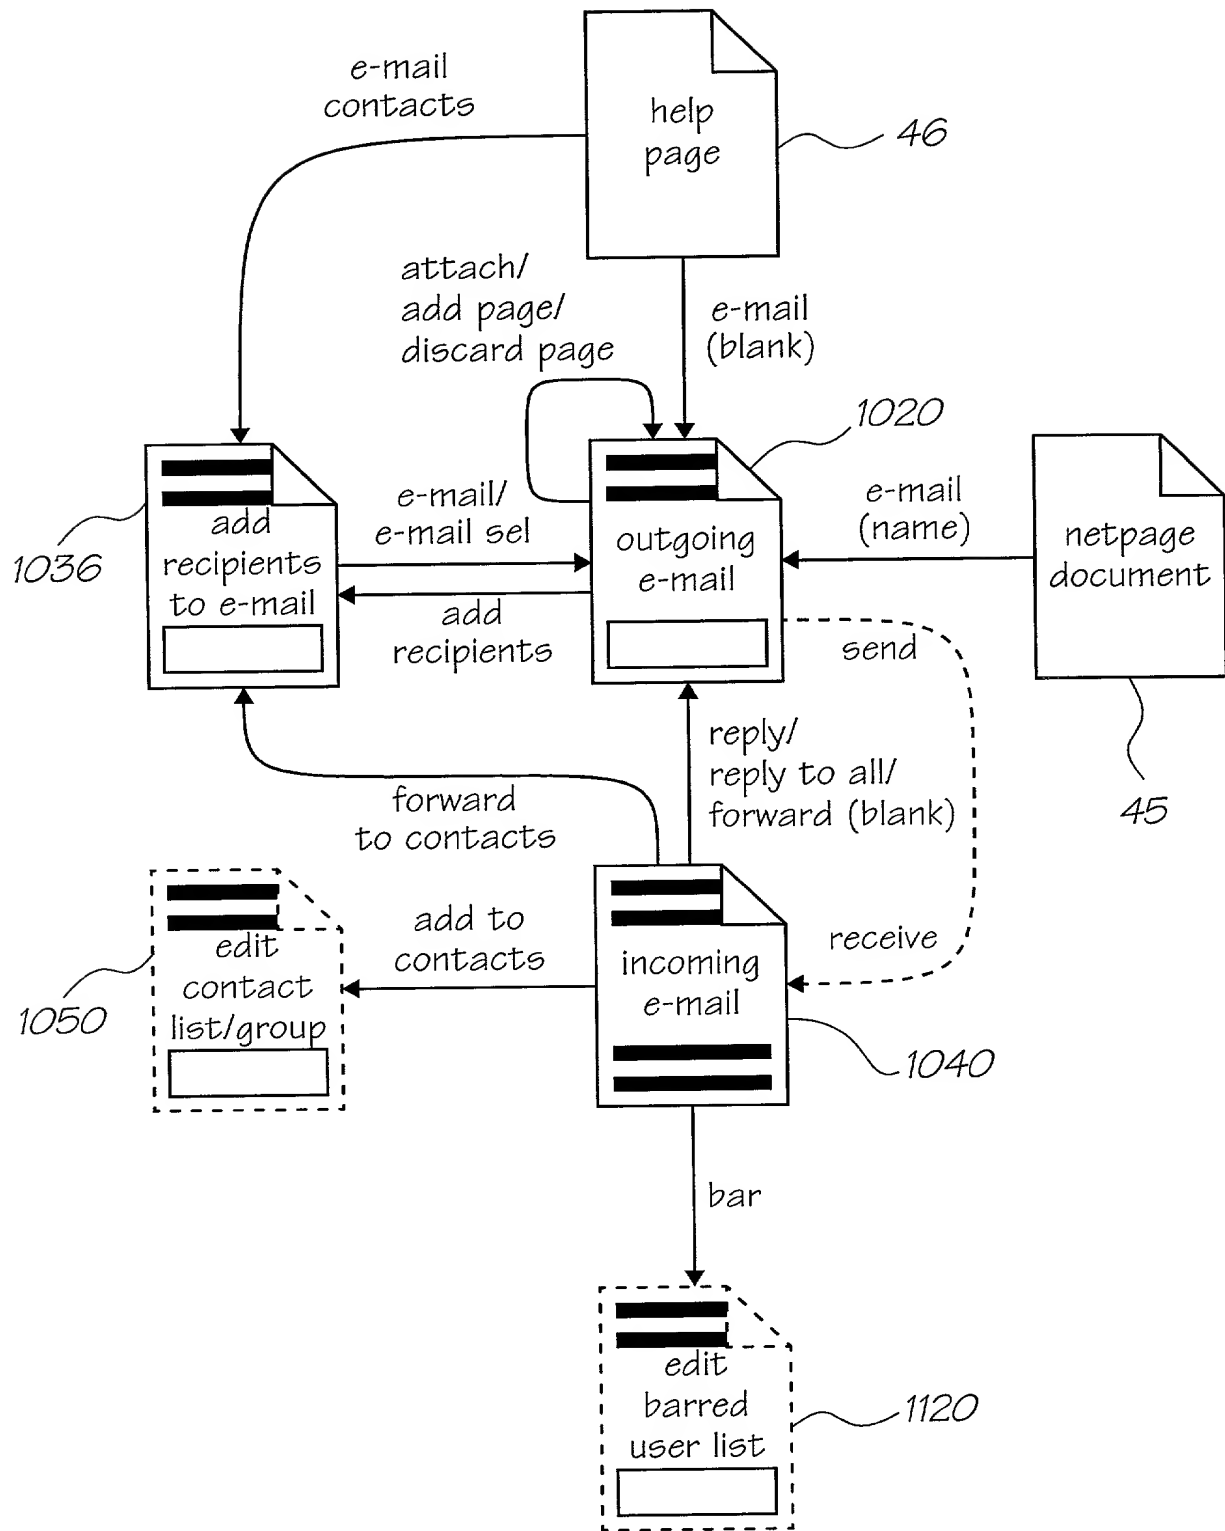


FIG. 50

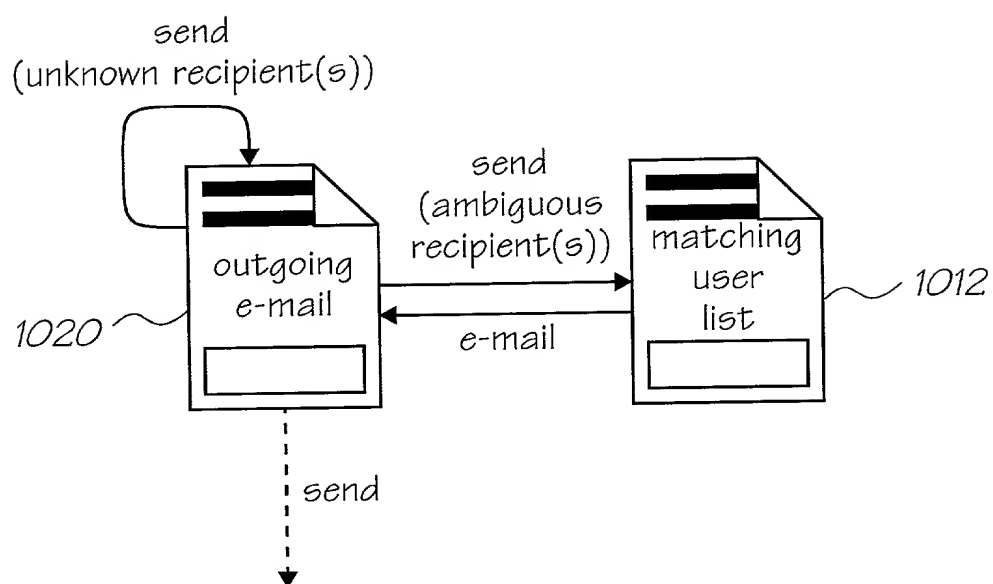


FIG. 51

The diagram illustrates an email composition window with the following components and labels:

- 1026**: Points to the header area containing the text "E-mail from sender at time & date".
- 1021**: Points to the "page # of #" text in the top right corner.
- 1007**: Points to the "To" label.
- recipient(s)**: The text inside the "To" input field.
- High Priority**: A checkbox label to the right of the "To" field.
- CC**: The label for the carbon copy field.
- copy recipient(s)**: The text inside the "CC" input field.
- add recipients**: A button located to the right of the "CC" field.
- Subject**: The label for the subject line.
- subject**: The text inside the "Subject" input field.
- line color palette**: A horizontal bar with a color selection interface.
- line width palette**: A horizontal bar with a width selection interface.
- e-mail body**: The large central area for composing the email content.
- 1028**: Points to the "line color palette".
- 1027**: Points to the "line width palette".
- 1034**: Points to the "e-mail body" area.
- ~ 1029 ~**: Placeholder text in the center of the email body.
- 1033**: Points to the "attach" button.
- 1020**: Points to the "add page" button.
- 1031**: Points to the "discard page" button.
- 1032**: Points to the "discard page" button.
- 1035**: Points to the "send" button.

FIG. 52

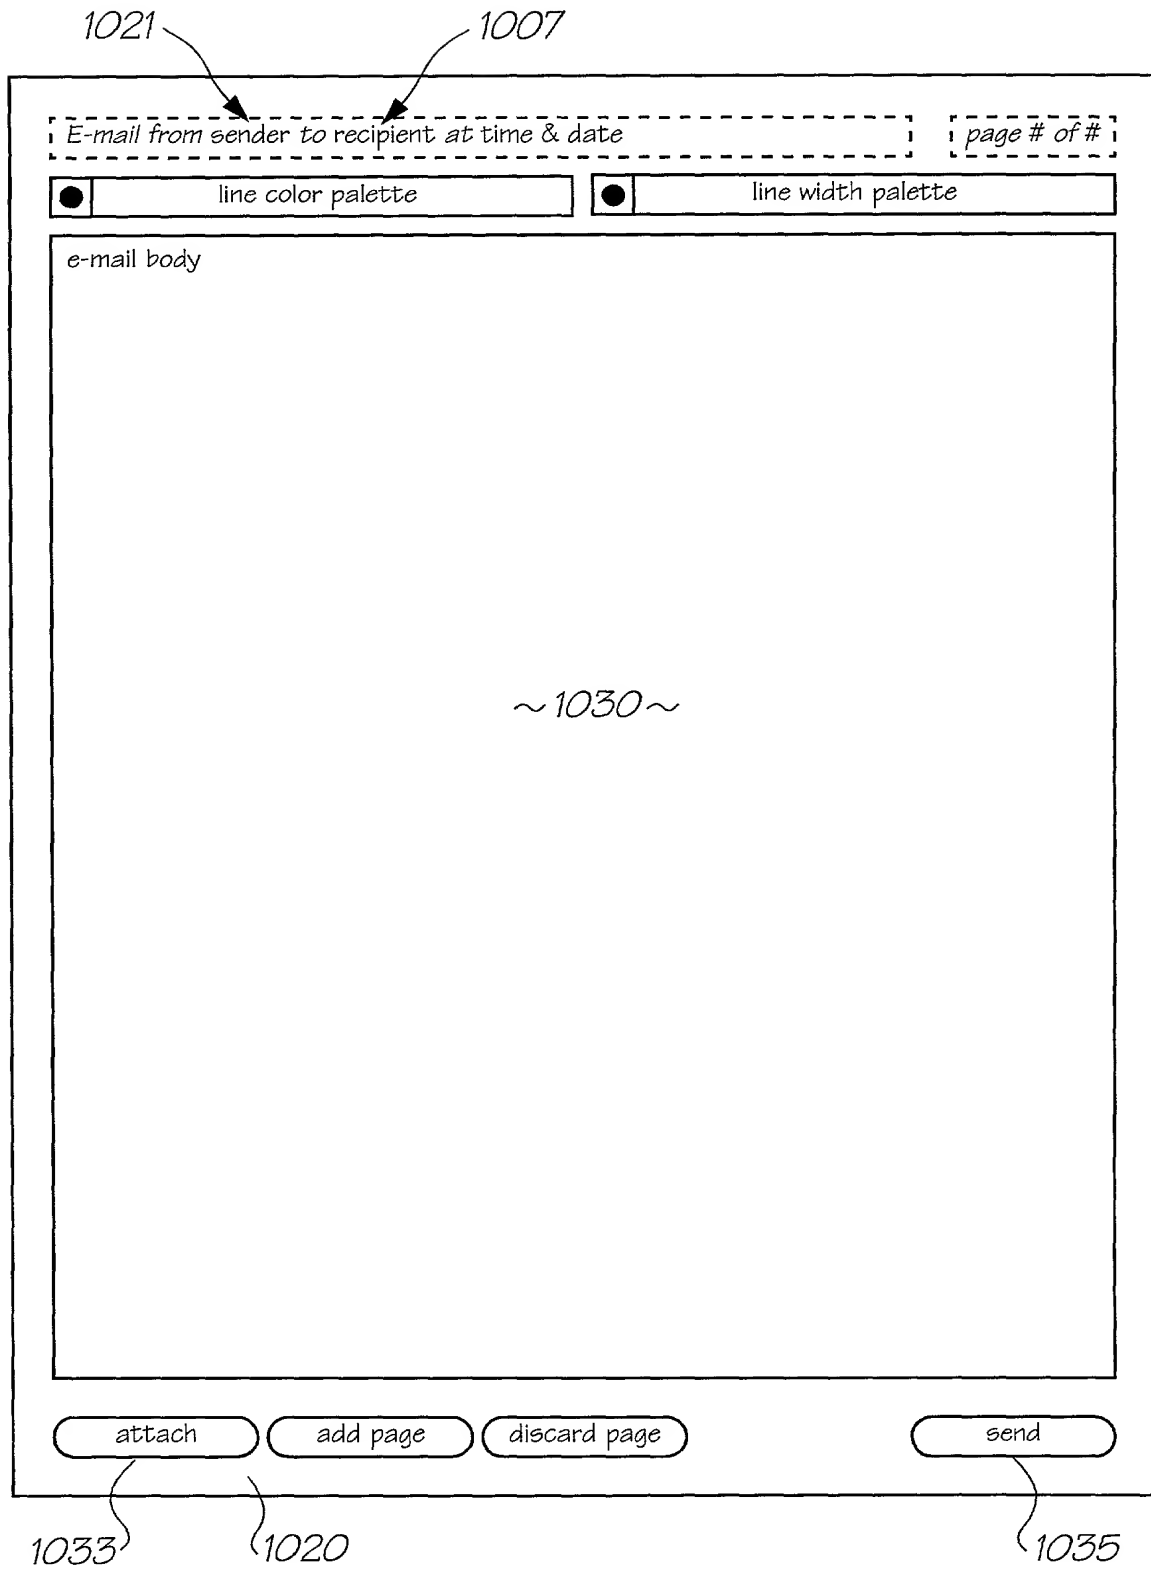


FIG. 53

1036

FIG. 54

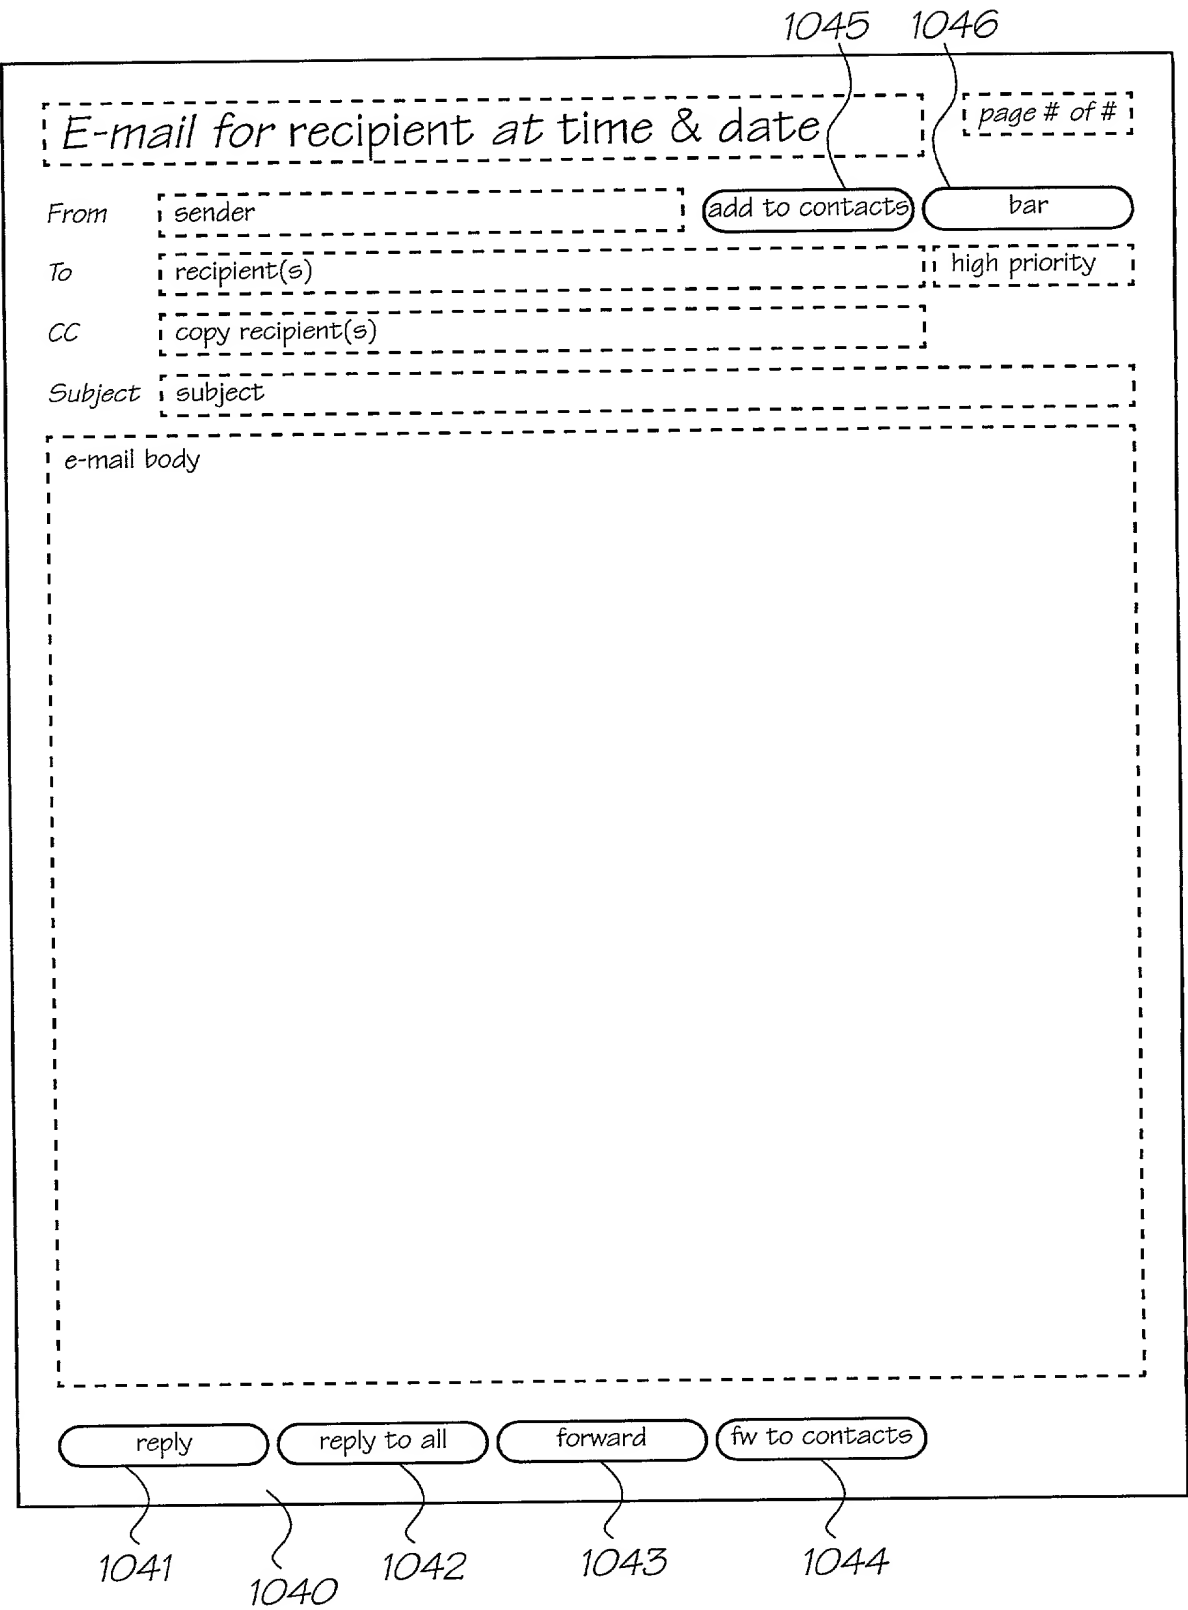


FIG. 55

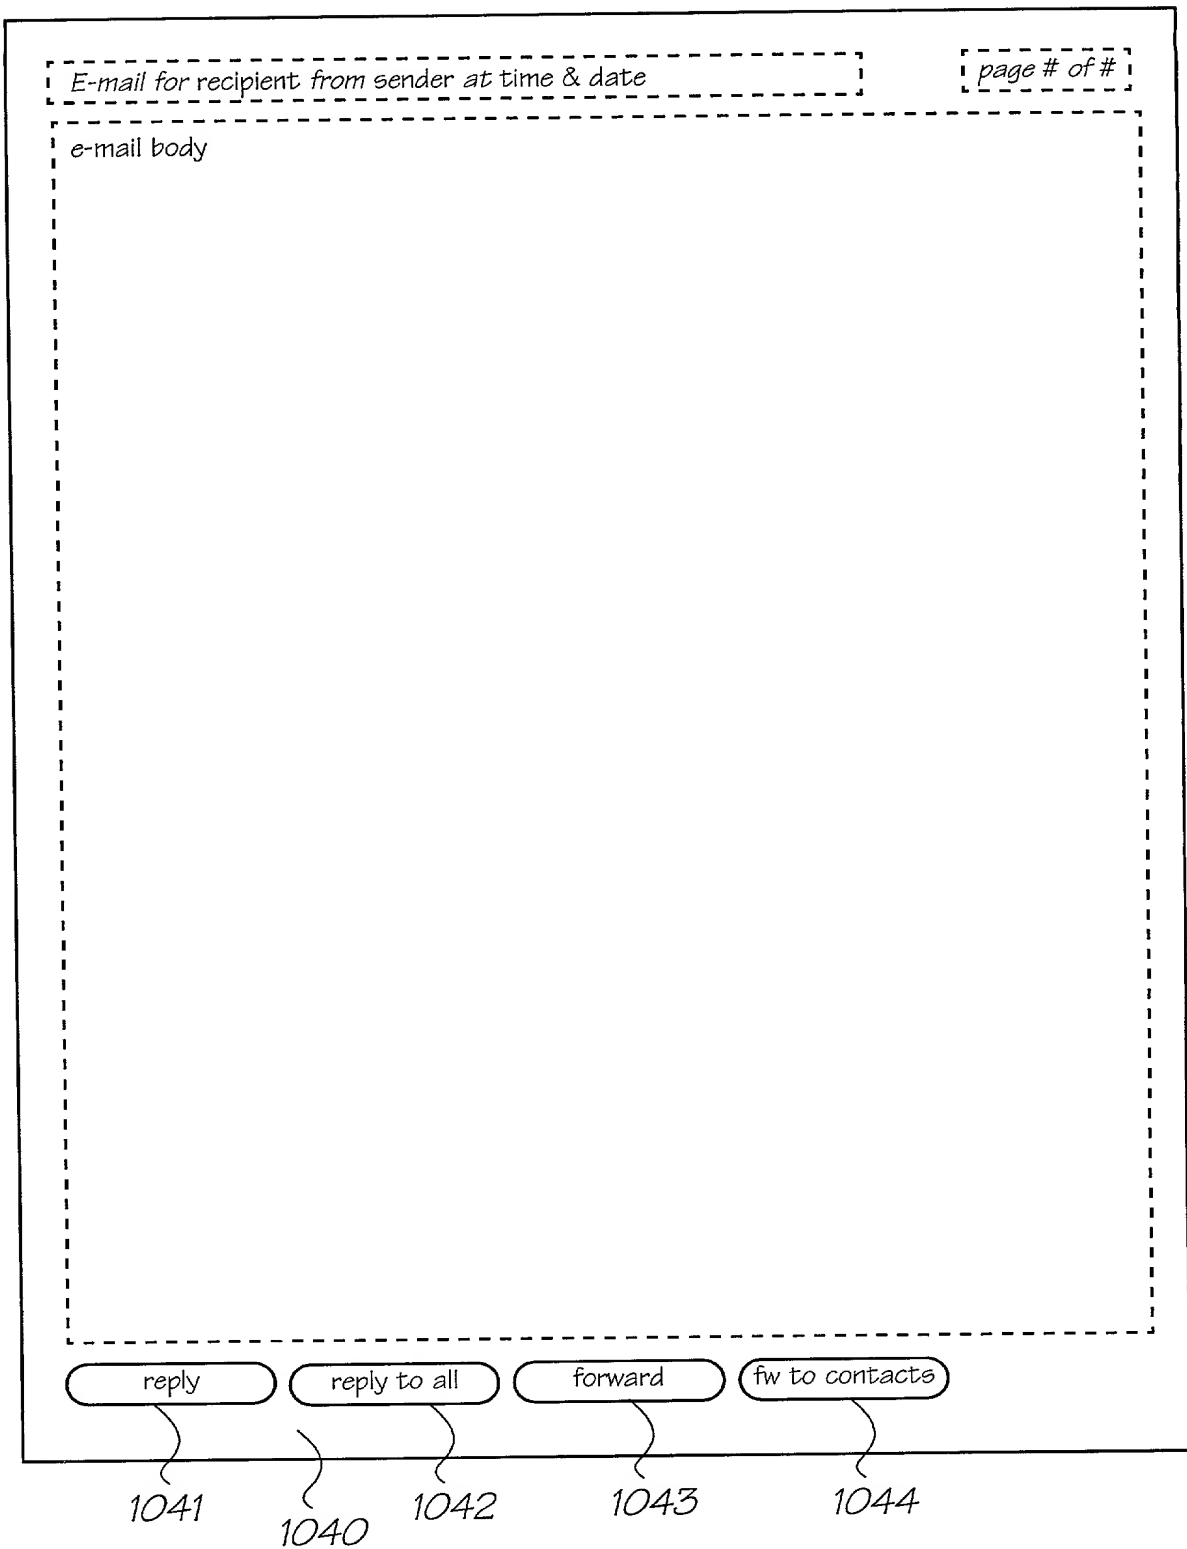


FIG. 56

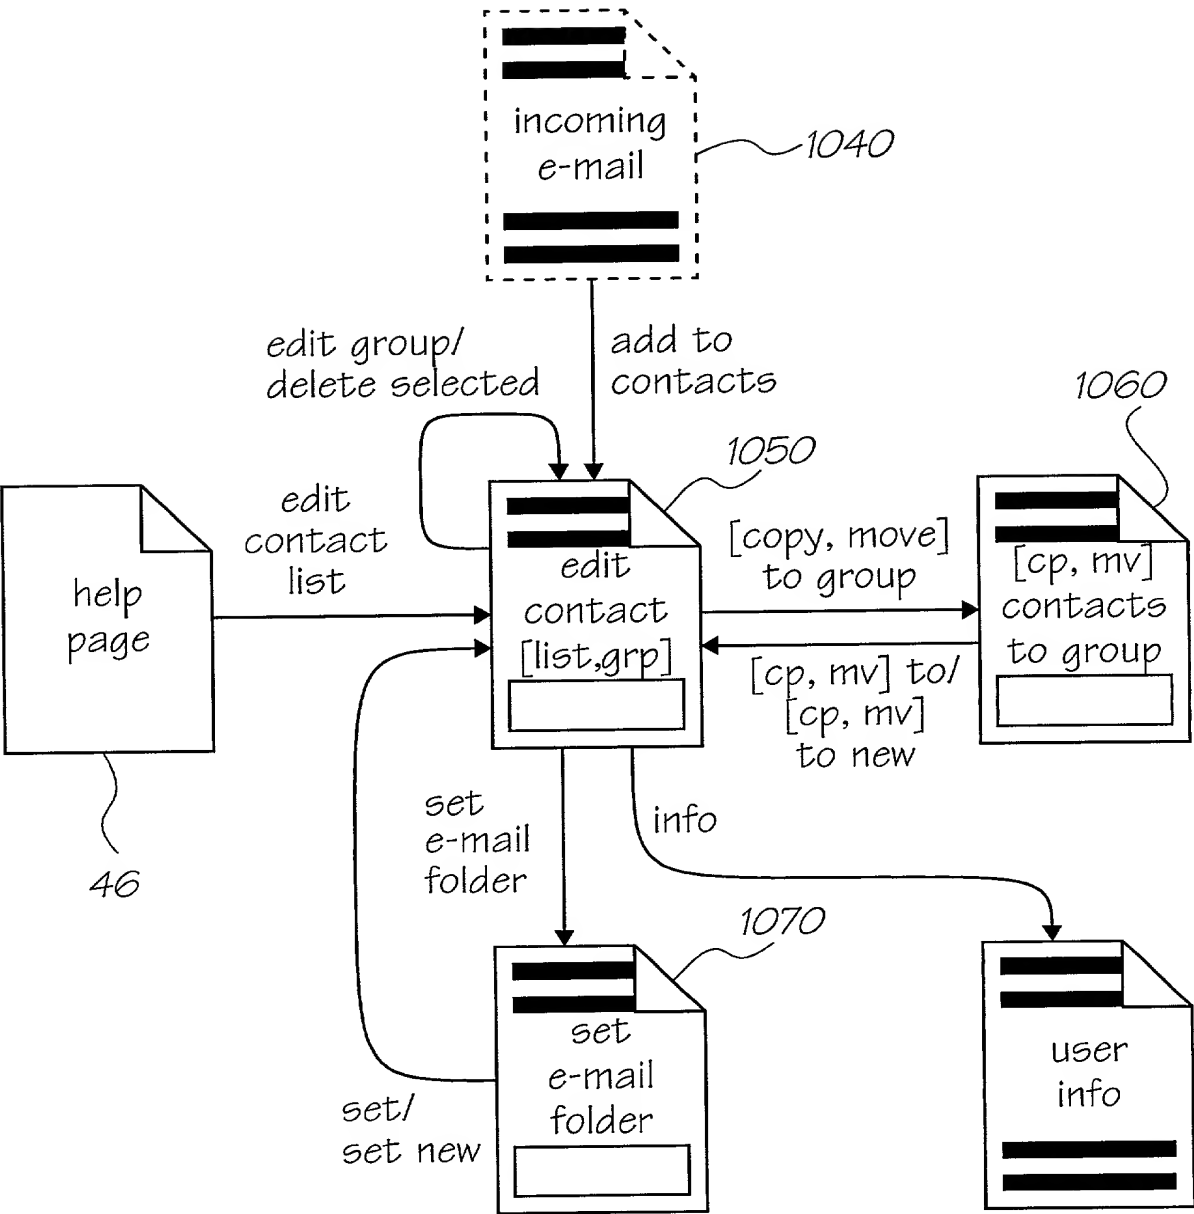


FIG. 57

Edit Contact [List, Group] page # of #

group contact name

1054 1055 1052

Select ☐ info contact name

1056 set e-mail folder e-mail folder name

☐ info contact name

set e-mail folder e-mail folder name

☐ info contact name

set e-mail folder e-mail folder name

☐ info contact name

set e-mail folder e-mail folder name

☐ info contact name

set e-mail folder e-mail folder name

☐ info contact name

set e-mail folder e-mail folder name

☐ info contact name

set e-mail folder e-mail folder name

delete selected copy to group move to group

1057 1058 1059 1050

FIG. 58

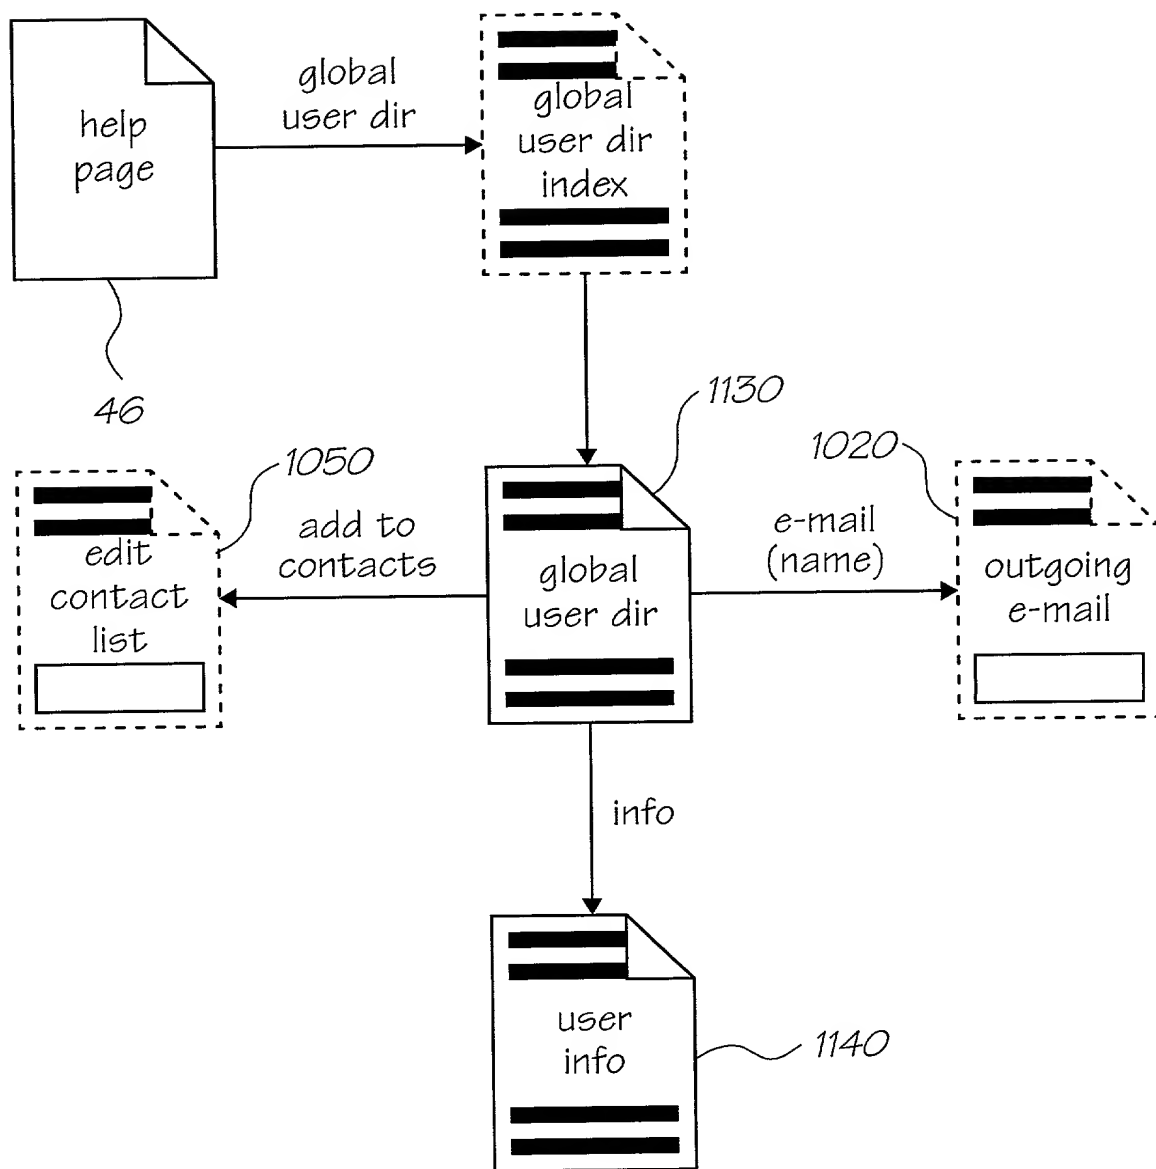


FIG. 59

User Information *page 1 of 1*

Name [title, first name, initials, nickname, family name]

Address [street address 1, street address 2,
city, state, ZIP Code, country]

Home Phone [home phone number]

Work Phone [work phone number]

Mobile Phone [mobile phone number]

Internet E-mail [Internet e-mail address]

1143

e-mail add to contacts

1141 1142 1140

FIG. 60

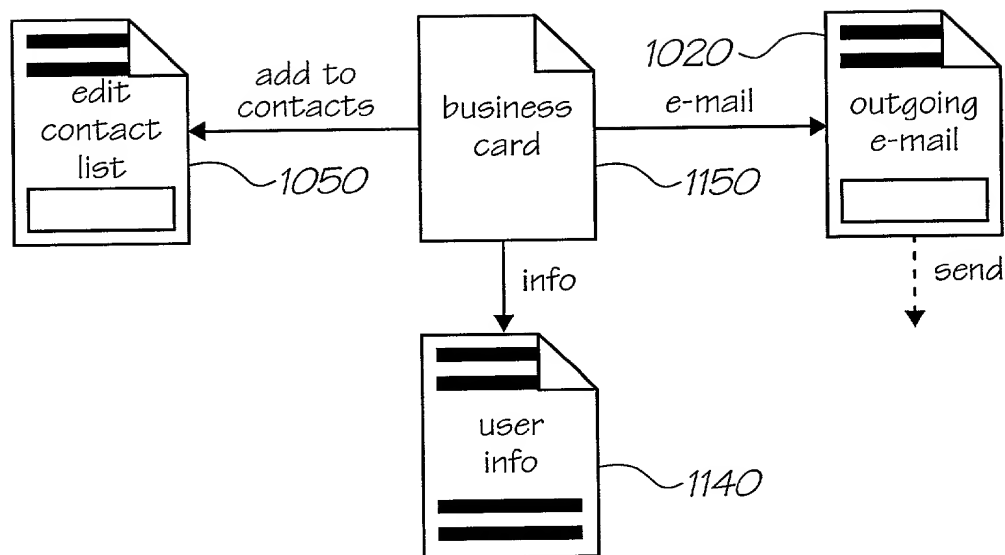


FIG. 61

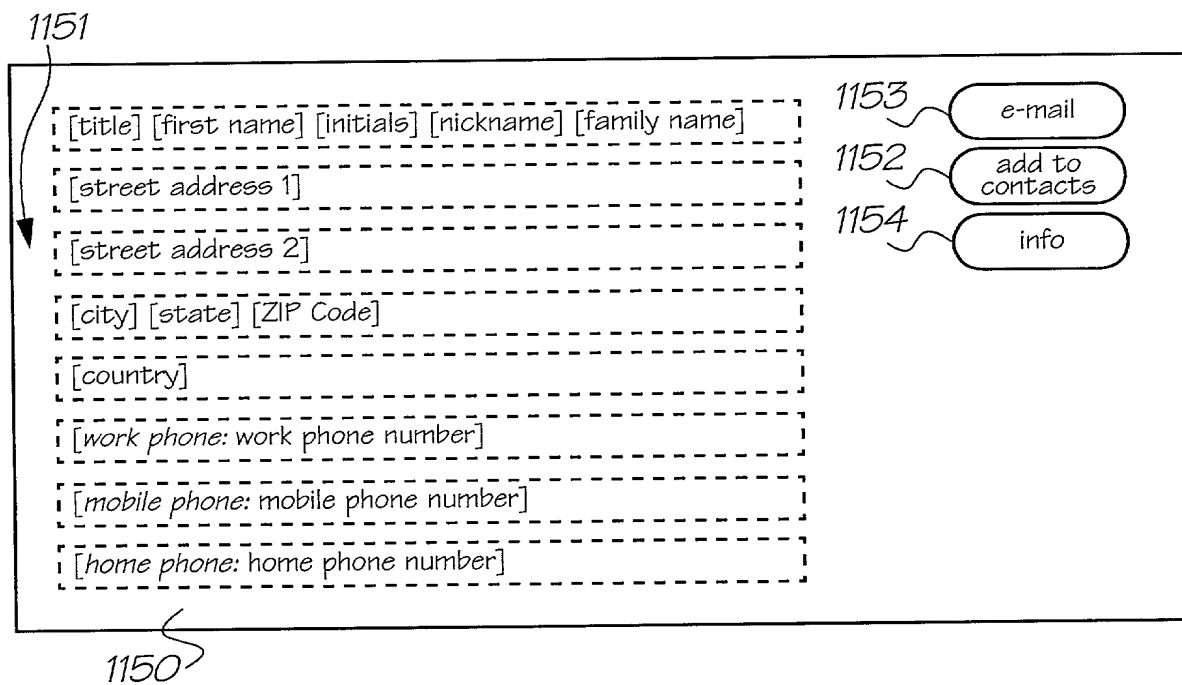


FIG. 62

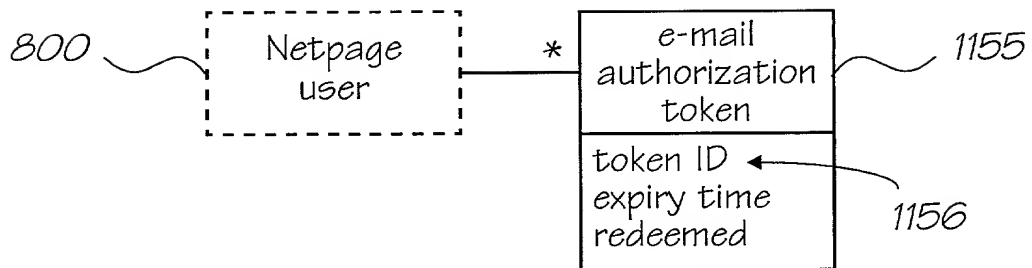


FIG. 63

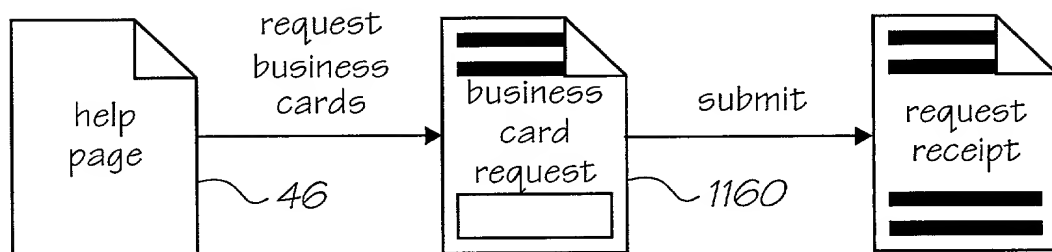


FIG. 64

Request Business Cards

page 1 of 1

Content

Include

Title

☐

First Name

☐

Initials

☐

Nickname

☐

Family Name

☐

Address

☐

Home Phone

☐

Work Phone

☐

Mobile Phone

☐

E-mail token

☐

Quantity

1163

50

☐

100

☐

200

☐

500

☐

Other

quantity

Background Texture

1162

☐

texture 1

☐

texture 2

☐

texture 3

☐

texture 4

☐

texture 5

☐

texture 6

☐

texture 7

☐

texture 8

☐

texture 9

☐

texture 10

☐

texture 11

☐

texture 12

☐

texture 13

☐

texture 14

☐

texture 15

☐

texture 16

☐

texture 17

☐

texture 18

☐

texture 19

☐

texture 20

☐

texture 21

☐

texture 22

☐

texture 23

☐

texture 24

Initialled by Administrator

Initials

submit

1160

FIG. 65

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	NPA025US
	First Named Inventor	Paul Lapstun
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Business Card as Electronic Mail Authorization Token

the specification of which (Title of the Invention)

☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PQ 2912	Australia	09/17/1999	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

☐ Customer Number → ☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.


Direct all correspondence to: ☒ Customer Number or Bar Code Label OR ☐ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle if any)		Family Name or Surname	
Paul		Lapstun	
Inventor's Signature			Date
Residence: City	Rodd Point	State	NSW
		Country	Australia
Post Office Address	13 Duke Avenue		
Post Office Address			
City	Rodd Point	State	NSW
		ZIP	2046
		Country	Australia


☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)
 Approved for use through 9/30/98. OMB 0651-0032
 Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

+

DECLARATION
ADDITIONAL INVENTOR(S)
Supplemental Sheet
 Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Kia				Silverbrook			
Inventor's Signature						Date	Sept. 12, 2000
Residence: City	Balmain	State	NSW	Country	Australia	Citizenship	Australian
Post Office Address	393 Darling Street						
Post Office Address							
City	Balmain	State	NSW	ZIP	2041	Country	Australia
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+